
50¢

ENGINEERING MUSIC SOUND REPRODUCTION

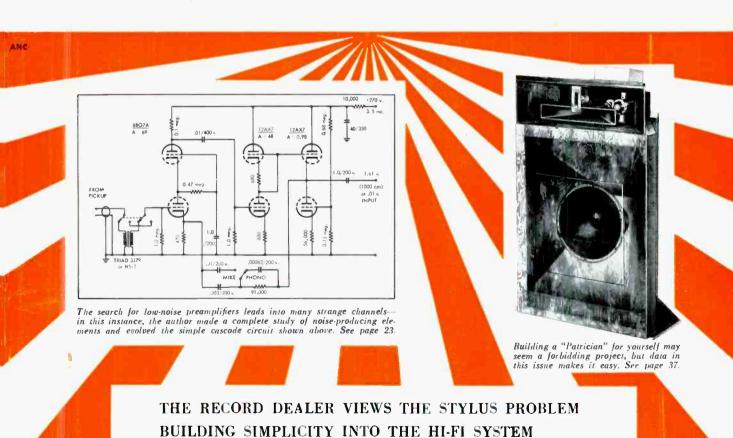

HIGH-GAIN TRANSISTOR AMPLIFIER

THE "PATRICIAN" GETS A HOME WORKOUT

THE STANDARD OF COMPARISON FOR OVER 20 YEARS

HIGH FIDELITY TRANSFORMERS

FROM STOCK... ITEMS BELOW AND 650 OTHERS IN OUR CATALOGUE B.



TYPICAL UNITS

LINEAR STANDARD series

Linear Standard units represent the acme from the standpoint of uniform frequency response, low wave form distortion, thorough shielding and dependability. LS units have a guaranteed response within 1db. from 20 to 20,000 cycles.

Hum balanced coil structures and multiple alloy shielding, where required, provide extremely low inductive pickup.

These are the finest high fidelity transformers in the world. 85 stock types from milliwatts to kilowatts.

1.5-10X 1.15-10X 1.15-10

LS-10X Shielded Input

Multiple line (50, 200, 250, 500/600, etc.) to 50,000 ohms...multiple shielded.

LS-19 Plate to Two Grids Primary 15,000 ohms. Secondary 95,000 ohms C.T.


LS-50 Plate to Line
15,000 ohms to multiple line . . . +15 db.

LS-63 P.P. Plates to Voice Coil Primary 10,000 C.T. and 6,000 C.T. suited to Williamson, MLF, ul.-linear circuits. Secondary 1.2, 2.5, 5, 7.5, 10, 15. 20, 30 ohms. 20 watts.

CASE LS-1 LS-2 LS-3 Length 31/8" 4-7/16" 5-13/16" Width .25/8" 31/2" 5" Height .31/4" 4-3/16" 4-11/16" Unit Wt. 3 lbs. 7.5 lbs. 15 lbs.

HIPERMALLOY series

This series provides virtually all the characteristics of the Linear Standard group in a more compact and lighter structure. The frequency response is within 1 db. from 30 to 20,000 cycles. Hipermalloy nickel iron cores and hum balanced core structures provide minimum distortion and low hum pickup. Input transformers, maximum level +10db. Circular terminal layout and top and bottom mounting.



HA-100X Shielded Input Multiple line to 60,000 ohm grid . . . trialloy shielding for low hum pickup.

HA-106 Plate to Two Grids
15,000 ohms to 135,000 ohms in two sections... +12 db. level.

HA-113 Plate to Line
15,000 ohms to multiple line . . . +12 db.
level . . . 0 DC in primary.

HA-133 Plate (DC) to Line
15,000 ohms to multiple line . . . +15 db.
level . . . 8 Ma. DC in primary.



Case H-1 Length ____236" Width ____1-15/16" Height ____31/6"

H=2 3-9/16" -2-13/16" 3½" 5 lbs.

ULTRA COMPACT series

UTC Ultra Compact audio units are small and light in weight, ideally suited to remote amplifier and similar compact equipment. The frequency response is within 2 db. from 30 to 20,000 cycles. Hum balanced coil structure plus high conductivity die cast case provides good inductive shielding. Maximum operating level is +7db. Top and bottom mounting as well as circular terminal layout are used in this series as well as the ones described above.

A-10 Line to Grid Multiple line to 50,000 ohm grid.

A-18 Plate to Two Grids 15,000 ohms to 80,000 ohms, primary and secondary both split.

A-2D Mixing Transformer Multiple line to multiple line for mixing mikes, lines, etc.


A-26 P.P. Plates to Line 30,000 ohms plate to plate, to multiple line.



A CASE
Length 1½"
Width 1½"
Height 2"
Unit Weight ½' 1½ 10

OUNCER series

UTC Ouncer units are ideal for portable, concealed service, and similar applications. These units are extremely compact ... fully impregnated and sealed in a drawn housing. Most items provide frequency response within 1 db. from 30 to 20,000 cycles. Maximum operating level 0 db. These units are also available in our stock P series which provide plug-in base. The 0-16 is a new line to grid transformer using two heavy gauge hipermalloy shields for high hum shielding



0-1 Line to Grid Primary 50, 200/250, 500/600 ohms to 50,000 ohm grid.

0-6 Plate to Two Grids 15,000 ohms to 95,000 ohms C.T.

0-9 Plate (DC) to Line Primary 15,000 ohms, Secondary 50, 200/250, 500/600.

0-14 50: 1 Line to Grid Primary 200 ohms, Secondary :5 megohm for mike or line to grid.



 OUNCER CASE

 Diameter
 %e"

 Height
 1-3/16"

 Unit Weight
 1 oz.

SPECIAL UNITS TO YOUR NEEDS

If you manufacture high fidelity gear, send your specifications for prices.

HET

UNITED TRANSFORMER CO

150 Varick Street, New York 13, N. Y. EXPORT DIVISION: 13 E. 40th St., New York 16, N. Y. CABLES: "ARLAB"

OCTOBER, 1955 VOL. 39, No. 10 Successor to RADIO, Est. 1917.

AUDIO

ENGINEERING MUSIC SOUND REPRODUCTION

C. G. McProud, Editor and Publisher

Henry A. Schober, Business Manager Harrie K. Richardson, Associate Editor Lewis C. Stone, Associate Editor Emery Justus, Canadian Editor Florence Rowland, Production Manager Edgar E. Newman, Circulation Director





Sanford L. Cahn, Advertising Director

Special Representatives— H. Thorpe Covington and Dick Knott. 7530 Sheridan Road, Chicago 30, Ill.

Mid West Representative— Sanford R. Cowan, 67 West 44th St., New York 36, N. Y.

West Coast Representatives— James C. Galloway and J. W. Harbison, 816 West 5th St., Los Angeles 17, Calif.

CONTENTS


Audio Patents—Richard H. Dorf	2
New Literature	6
Letters	8
About Music—Harold Lawrence	14
Employment Register	16
Editor's Report	20
Cascode Preamp Improves Signal-to-Noise Ratio—M. V. Kiebert, Jr	23
At Home with Audio—Lewis C. Stone	28
The Record Dealer Views the Stylus Problem—Sam Goody	32
The "Patrician" Gets a Home Workout-Cullen H. Macpherson and Roy	
C. Carlson	37
The Acoustic Earset—a New Approach to Conference Applications—	
D. D. Jones	43
Building Simplicity into the Hi-Fi System—Ross H. Snyder	49
The New Minshall Organ—In Two Parts—Part 2—Richard H. Dorf	54
Unique Relationship—Norman H. Crowhurst	62
High-Gain Transistor Amplifier—James J. Davidson	66
Equipment Report—H. H. Scott 710-A Stroboscopic Turntable— National	
"Criterion" Tuner—Acoustic Research AR-1 Loudspeaker System—	
Harman-Kardon Model C-300 "Trend" Amplifier	74
Record Revue—Edward Tatnall Canby	82
Audio ETC—Edward Tatnall Canby	88
New Products	92
Coming Events	105
Industry Notes	110
Industry People	111
Advertising Index	112

AUDIS (title registered U. S. Pat. Off.) is published monthly by Radio Magazines. Inc., Henry A. Schober, President; C. Q. McProud. Secretary, Executive and Editorial Offices, 204 Front St., Mincela, N. Y. Subscription rates—U. S. Possessions. ('anada and Merico, \$4.00 for one year, \$7.00 for two years, all other counter, \$5.00 per year, Single copies 50c. Frinted in U. S. A. at Lancaster, Pa. All rights reserved. Entire contents copyright 1955 by Radio Magazines, Inc. Entered as Second Class Matter February 9, 1850 at the Post Office, Lancaster, Pa. under the Act of March 3, 1879.

RADIO MAGAZINES, INC., P. O. Box 629, MINEOLA, N. Y.

AUDIO • OCTOBER, 1955



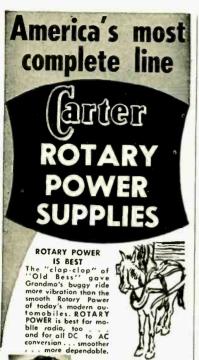

DC TO AC CONVERTERS

For operating tape re-corders, dictating ma-chines, amplifiers and other 110-volt radio-oudio devices from DC or storage batteries. Used

by broadcast studias, program producers, executives, salesmen and other "field workers".

DUO-VOLT GENEMOTORS



CHANGE-A-VOLT DYNAMOTORS



Operates 6-volt mobile radio sets from 12-volt automobile botteries . . . also from 24, 32 and 64-volt bottery power, One of many Carter Dynamotar models. Made by the world's largest, exclusive manufacturer of rotary power supplies.



. . BE SATISFIED BE SURE . . BE SATISFIED

AC can be produced by reversing the flow of DC, like throwing a switch 120 times a second. But ROTARY converters actually generate AC voltage from an alternator, some as utility stations. That is why ROTARY power is such clean AC, so dependable . . essential for hash-free operation of recorders from DC power.

	recorders from DC power.
L)	MAIL COUPON for illustrated bulletin with complete mechanical and
4	electrical specifications and
	charts. Carter Motor Co., Chicaga 47

CARTER MOTOR CO. N. Maplewood Ave. Chicago 47, Illinois
Please send illustrated literature containing com- plete information on [] Carter "Custom" Con- verters and [] Dynomator Power Supplies
NAME

CityStote

America's most audio PATENTS Complete line

RICHARD H. DORF*

HE ACRO PRODUCTS COMPANY patent on the Ultra-Linear amplifier circuit was granted recently to David Hafler and Herbert I Keroes of Philadelphia; its number is 2,710,312. Though Audio readers are doubtless familiar with the subject, it is of some interest to go into it anew from the standpoint of the patent specification, which contains a more generally lucid explanation of the idea than anything this writer has seen in print. The following is, therefore, while not necessarily directly quoted, the line followed by the inventors themselves.

After pointing out that criteria for ideal sound reproduction can only be judged finally by actual listening, the inventors remind us of the two schools of amplifier thought-the one which adheres to the use of triode tubes because they produce "sweet" or "smooth" sound, and the other addicted to the tetrode or beam tube because of its "crispness" and "cleanness." Each type of tube obviously produces its own peculiar character of distortion which pleases its advocates and displeases its opponents. These distortions are elusive and unmeasurable, but are nevertheless real to the critical listener.

The conclusion which is obvious to the inventors is that the only way to reconcile the two schools and perhaps make an amplifier that will satisfy both is to invent some new type of tube, one which will provide sound acceptable to both schools and which will, in addition, have certain desirable characteristics not all presently available in either triodes or tetrodes. These are listed as follows:

- 1. Low internal impedance-now present in triodes but not tetrodes.
- 2. High power sensitivity-offered by present tetrodes but not by triodes.
- 3. Lower harmonic and intermodulation distortion than either the triode or the tetrode, at both high and low power levels.
- * Electronics Consultant, 255 W. 84th St., New York 24. N. Y.

4. High efficiency, so that adequate power bulk or cost.

output can be obtained without too much The first approach to realization of these

aims is to point to the only significant dif-ference between a triode and a tetrode. This is the screen grid, which gives the tetrode high efficiency, but whose absence gives the triode low plate resistance.

Next, tying up the two types by a sort of conversion-process thinking, it is noted that a tetrode can be transmuted into a triode by simply connecting the screen to the plate. This immediately gives the two boundary conditions for tetrode operation: (1) full tetrode operation in which the screen is entirely energized by d.c. and forms no active output element, and (2) full triode operation in which the screen forms as much of an active element as the plate, being energized entirely by the same dynamic current and voltage variations as the plate. Between these boundaries there must be intermediate conditions in which the be intermediate conditions in which the screen is energized partially by a static d.c. and partially by plate-voltage variations brought about by connecting the screen across only a portion of the plate load. These intermediate conditions were investigated by the inventors and yielded surpris-

ing results.

Figures 1, 2, 3, and 4 show four methods of connecting the screen for these intermediate conditions-so that the screen is connected both to d.c. and to a part of the plate load. In Fig. 1, a tertiary winding on the output transformer primary couples output energy between plate and screen. In Fig. 2, the screen is tapped down on the output the screen is tapped down on the output transformer for the same purpose. Both of these are single-ended outputs. Figure 3 shows the same scheme as Fig. 2, but for push-pull operation. In Fig. 4 the tap is made on a load inductor connected across the transformer primary. In each case except Fig. 1 the degree of the difference between triode and tetrode operation is determined by the position of the tap. With the tap at B-plus, there is full tetrode operation; with




Fig. 1




Fig. 2

AUDIO ● OCTOBER, 1955



you can assemble your entire quality-endorsed components...each the your continuing satisfaction assured by really complete service and spare parts Today, you can assemble your entire high fidelity phonograph with B. I. C. fully guaranteed finest of its kind ...

petitively priced that they are often Compare the British Industries Group ship and value. Your sound dealer will verify that despite their uniform superiority, B. I. C. products are so comfar less expensive than even ordinary with any other components for craftsmancomponents.

B. I. C. High Fidelity Plan Book Write for illustrated

British Industries Corporation, Dept.s AOS Port Washington, New York

power-amplifying tetrodes. Pins and The original KT66

"The finest Audio tubes ever made.

Genalex

Please send the Br. L.C. Migh Fidelily Plan Gook to

State

The original 2729
... lowest hum, highest gain, audic pre-amplifier – equalizer tube ... \$2.99 net.

Model T "Crest" GARRARD



variable and adjustable. Each ma-GARRARD Model 301 "Profeswritten inspection report on wow rumble, flutter... \$89.00 net

ates all basic

Compact, efficient . incorporates all record-playing features of famed

Model RC-80 changer...

3 speed Manual Player with automatic start and stop.

\$32.50 net less cartridge



radio studios. Microgroove arm and pick-up complete \$59.00 net Iynamic Pick-up and Tone arm used by scientific laboratories, Acclaimed by experts as the finest in the world! Widely

As described in Mr. Briggs popular books. Choice of furniture finishes. \$99.00 net

Wharfedale Loudspeakers

TL 12 Amplifier Varistope Pre-amp.



Shelf-model Loudspeaker

maximum Bass, Minimum Space.


Antiling performance from sightly darger than the speaker it self. Single-shall and self. self. Single-shelf and double-shelf models; and R.) Wharfedale unit (complete with special Briggs designed speaker.) \$24.50 to \$57.50 net.


KIVET EUGE ... Customized High Fidelity Cabinets. A complete selection of oquipment and loutspranker cabinets to fit components of all manufacturers, avail able in fine furniture finishes and construction, or as inexpensive unpainted kits.

Especially designed for you, if you prefer to contain your high fidelity system in a fine furniture cabinet, instead of informal arrangements or built-ins. You can make the installation yourself with ease, because River Edge cabinets are finished with panels and pull out drawers, precut to fit your choice of components and your superifications, all at nextra charge. Write for catalog.

Briggs

River Edge

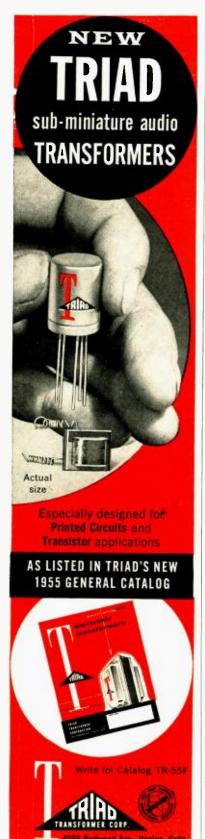






Fig. 4 (above). Fig. 3 (left).

the tap at plate there is a full triode operation. With triode operation defined as 100 per cent screen loading and full tetrode operation as 0 per cent screen loading, the percentage of screen loading for various stages of intermediate operation is the square of the voltage ratio between signal voltage at the screen and that at the plate. Percentage of screen loading may thus be defined as the percentage of plate-circuit signal power transferred to the screen. The inventors note that power is transferred to the screen over only a part of the signal cycle, when the absolute value of plate potential falls below that of the screen. This transfer has a linearizing effect on plate characteristics. Experiments have shown that the ideal

Experiments have shown that the ideal mode of operation for a number of popular tubes—61.6, 5881, 807, KT-66, etc.—is with approximately 18 per cent screen loading. Internal impedance of the tube drops very sharply when the experimenter proceeds from 0 per cent to 18 per cent screen loading but levels off at a very low value just beyond 18 per cent. Maximum undistorted power output falls only slightly out to 18 per cent and is very high, but drops rapidly thereafter. Low-level distortion decreases rapidly from 0 to 18 per cent but far less rapidly thereafter. High-level distortion remains low out to 18 per cent but increases rapidly with higher percentages.

rapidly with higher percentages.

It follows, therefore, that the tetrode or beam tubes are actually operating as though they were tubes of a new type with the high power sensitivity characteristic of tetrodes, and the low internal impedance typical of triodes. There is very little more low-level distortion than triodes produce and a great deal less high-level distortion. This is the essence of the Ultra-Linear circuit. The 18 per cent figure for screen loading does not, of course, apply to all tubes. Tubes of the

6V6 type, for example, do best with screen loading of about 5 per cent, and for each general type there is an optimum figure.

Another advantage of ultra linear operation is the possibility of applying higher electrode potentials to the tubes, thus obtaining higher power output, without exceeding dissipation ratings. In ordinary operation a limiting factor in tetrode use is screen dissipation, which is generally listed in the manuals for static operating potentials and screen currents. Under dynamic operating conditions the allowable maxima may be exceeded and the tube damaged. With Ultra-Linear circuitry the screen potential is no longer fixed but follows the potential of the plate. If, therefore, the potential on the screen does not as greatly exceed that on the plate as when the screen is unloaded, the tube can be operated safely with higher supply voltages than those normally recommended by the manufacturer. Figure 5 shows the Ultra-Linear story in

Figure 5 shows the Ultra-Linear story in graphic form for a particular tube for which about 18 per cent is optimum screen loading. The horizontal scale is marked in percentage of screen loading from zero to 100, and there are four vertical scale markings, one for each of the graph lines. The line marked Rint shows effective tube internal resistance; notice how sharply it drops until the optimum 18-per-cent point. The Pe line indicates "undistorted" power output maximum. Its fall to the 18-per-cent point is negligible but more rapid thereafter. The remaining two lines show low- and highlevel intermodulation.

¹ Which always reminds me—entirely irrelevantly—of a childhood German-dialect sentence, "Der cow hat ofer der fence gechumped and der cabbage gedamaged."



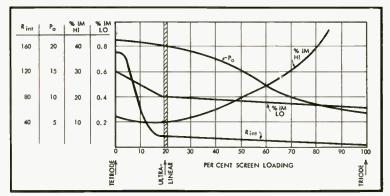


Fig. 5

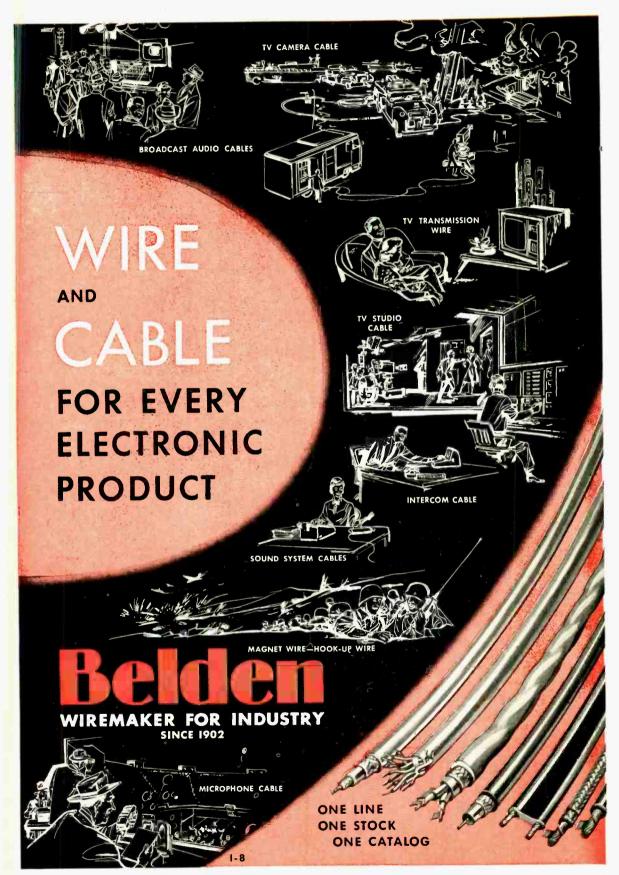

AUDIO • OCTOBER, 1955

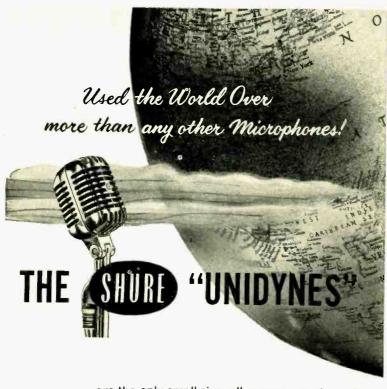

are the only small size, all-purpose moving coil Dynamic Microphones that reduce the pickup of random noise energy by 67%.

The Unidynes, 55s and 556s, simplify P. A. installation . . . enhance your reputation . . . insure customer satisfaction by eliminating or reducing callbacks due to critical gain control settings-often necessary when conventional microphones have been installed.

No wonder the Unidynes are used the World over-more than any other microphonesfor finest quality public address . . . theater stage sound systems . . . professional recording ... remote broadcasting.

SHURE BROTHERS, Inc.

Microphones and Acoustic Devices 225 W. Huron St., Chicago 10, Illinois Cable Address: SHUREMICRO

NEW LITERATURE

• Allied Radio Corporation, 100 N. Western Ave., Chicago 80, Ill., reflects the continued growth of the industry with its new 1956 catalog which contains 324 pages, making it the biggest catalog published by any electronic distributor. Featured in an attractive rotogravure section is a selection of 34 complete music systems. Selected on the judgment of music lovers, product research organizations, and qualified publications, the systems range in price from \$98.50 to \$1131.50. Build-it-yourself enthusiasts will find a bigger-than-ever selection of high-fidelity amplifier kits plus expanded listings of custom cabinet kits for housing speakers and components. Copy will be mailed free on request.


amplifier kits plus expanded listings of custom cabinet kits for housing speakers and components. Copy will be mailed free on request.

Permofiux Corporation, 2835 N. Kedzie Ave., Chicago 18, Ill., has published individual product literature sheets on three of the firm's better known audio devices, namely, the HD-1 Hi-Fi headset, the new Largo Dual-8 speaker system, and the Diminuette speaker system. Each sheet is complete in the sense that it gives both technical and physical specifications as well as prices of the respective items. P-2 e Instrument Division, Federal Telephone and Radio Company, 100 Kingsland Road, Clifton, N. J., will mail on request a 4-page descriptive bulletin covering the company's new Type FT-FNA audio-frequency wave analyzer. The instrument covers a frequency range of 30 to 20,000 cps and has a length of scale which covers nearly seven feet of linear graduation. Sensitivity to signals as low as one microvolt permits use of low-output transducers, such as microphones, without preamptifier. The analyzer is also exceptionally unique in many other respects and well worthy of investigation for professional and laboratory use. P-3 eGeneral Electronic Equipment Company, P. O. Box 347, Easton, Penn., announces a new two-color brochure describing the firm's new line of kits and complete instruments that are available through jobbers and distributors. The bulletin includes oscilloscopes, tube testers, Geiger counters, and multitesters. Reasonable quantities of the folder will be supplied to distributors for use as mailing enclosures. Space is provided for distributor's imperint.

PA e RCA Tube Division, Harrison, N. J., has just brought out a revised edition of the company's popular Power and Gas Tubes Booklet. The 24-page publication contains technical data on 178 vacuum power tubes including forced-air-cooled and water-cooled types ranging in output up to 500 kw; gas, mercury-vapor and vacuum-guage tubes. Each tube type is covered by a text description, tabular data, and a base or envelope conn

Audiosphere, Connoisseur, EMC, Esoteric, Livingston, RCA Victor, Oceanic, HMV and others.

• All-State Welding Alloys Company, Inc., 249-55 Ferris Ave., White Plains, N. Y., introduces two new solders widely applicable in joining aluminum where shear strengths of 18,000 and 20,000 psi are desirable, in a new folder titled 'How to Use and Apply Alloys and Fluxes for Soldering, Brazing and Welding Aluminum and Aluminum Alloys.' The folder is a handy reference in the selection of the proper alloy for various types of metal bonding. Single copies of the publication are available free on request to the company or to any of its distributors. F-7 • CBS-Hytron, Danvers, Mass., is now offering the second edition of its Crystal Diode Manual. Revised and brought up-to-date, the new edition includes germanium and silicon diodes, encased in both glass and plastic. Profusely illustrated, the manual continues the down-to-earth, informative approach which made the first edition popular. Irrespective of whether your interest in semi-conductors is academic or professional, a copy of this booklet will be a valued addition to your technical library. Requests should specify Bulletin E-217.

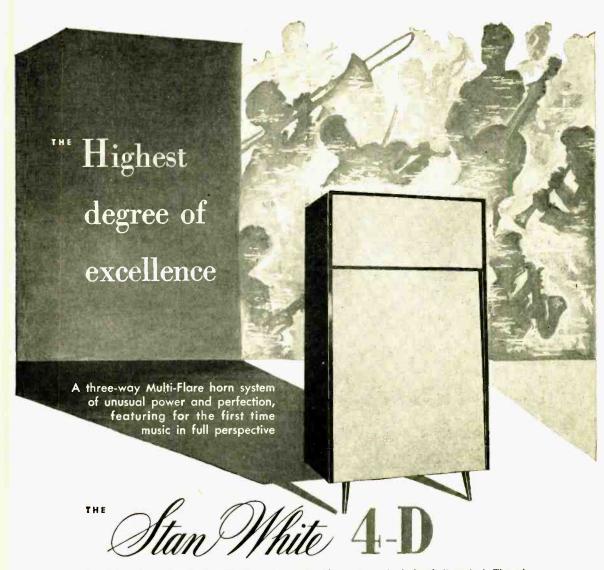

Sound is a three dimensional audio vibration occurring along a time axis. (a fourth dimension). Through the miracle of Multi-Flare, you can hear . . . for the first time . . . sounds reproduced as they originally occurred, in their proper time sequence. To hear a Stan White speaker is to understand the true meaning of High Fidelity. The 4-D features: 1 fifteen inch bass driver with 4 inch voice coil (15-500 cycles). I mid-range 30 watt horn driver (500-1000 cycles). I high frequency 25 watt horn driver (1000-20,000 cycles) • Peak power handling capacity: 60 watts • Impedance: 16 ohms. • Cabinets: Blonde Korina, Walnut, Red Mahogany and Ebony. Three coats of lacquer hand rubbed to a lustrous finish, with satin finished brass legs. • Dimensions: 61 x 36 x 24 inches. Shipping weight: 350 lbs. The Millenium 4-D. Net 100000



The 4-D for Theatre Systems

Model 120 Series: 4-D Theater Speaker System providing new 4 dimensional sound with tremendous power and clarity. For large halls and auditoriums. Will outperform any system at any price. • Components: 2 fifteen inch bass drivers with 4 inch voice coils (10-300 cycles). 2 mid-range 30 watt horn drivers (300-1000 cycles). 1 high frequency 25 watt horn driver. • Peak power handling capacity: 120 watts.
• Impedance: 16 ohns. • Dimensions: 67 x 40 x 24 inches.

150000 Shipping weight: 400 lbs. Net.

All Stan White Cabinet Speakers are back loaded multi-flore horn systems with the speakers and cabinets designed as matched units. The multi-flare horns are curled into the cabinet within 1% of a special horn formula. See the complete line at your High Fidelity Dealer or write:

Stan White mc.

725 South LaSalle Street A Division of Eddie Bracken Enterprises

Chicago 5, Illinois



LETTERS

Corrections

SIR:

I am sorry to report several errors in my article "An outputtransformerless amplifier-speaker system" (July, 1955) which were not in the manuscript I sent you.

The most serious of these is the deletion of the name of the manufacturer of the special 250-ohm speaker, since this manufacturer was the only person who really went out of his way to cooperate in furnishing this special unit. I have already received seven inquiries from persons who want to know where they may obtain this speaker, and I am not looking forward to answering several hundred more letters. (The name of the manufacturer was omitted at the request of the manufacturer himself, since he didn't look forward to having to make several hundred of these speakers, one at a time. Special voice coils can be had on order from replacement-cone houses, if sufficent urgency is indicated. However, one manufacturer, Stephens, does make a standard model with a 500-ohm voice coil. Ed.)

Electronic Transformer should have been mentioned as the supplier of the 2-Hy. 800-ma choke, their part number 152201, as this item is not readily obtainable elsewhere.

The "7 watts at 3 per cent IM" on page 13 should read "70 watts"; the baking temperature of 35 deg. on page 15 should be 350 deg.; the letters A, B, C, and D should be placed adjacent to the four arrows at the upper right of the diagram on page 14, starting from the top with A and progressing downward; a dot should appear on the lead from the lower 6337 plate where it crosses the lead from R_B ; the value for the potentiometer between the cathodes of the 6337's should be indicated as 10 ohms, and its symbol should be listed as R_B .

I trust you will be able to publish these corrections in an early issue.

CURTISS R. SCHAEFER, R. D. 2, Clarks Summit, Pa.

(We suggest that readers make these changes in their July issue, and we regret that errors such as these creep in occasionally, ED)

Optimistic (?) Claims

SIR

As one who has been interested in "the art" for several years, I am appalled at what seems to be a current trend. Editorially, you give just deserts to those unscrupulous manufacturers who label their junk "Hi-Fi." But what seems to escape your notice, and what is fully as disturbing is the manufacturer who advertises, "Do you dare to contemplate this luxury?" or the one who bills his particular gadget as practically the greatest advance since the vacuum tube.

Granted that it is desirable to achieve a more widespread interest in (and consumption of) home audio, appealing to mass snobbery and mass poor taste seems a rather illegitimate way to achieve a mass market. Soon the tastes and desires of the nincompoop gadget collectors will be influencing makers to the point where the only difference between most makes of equipment will be the color of the leatherette covers and plastic pushbuttons which weren't needed in the first place. The parts you can't see will be uniformly poor.

If this seems an exaggeration you might check the shelves of your local camera shop. Photography went through these same growing pains twenty-five years ago. Or you might compare the life expectancy and workmanship of today's Snazzy Eight with the classic automobile of yesterday (or of Europe).

The only apparent ray of hope (and it is dim) is the fact that the audio field is dominated by many small companies. Perhaps some of them will retain the integrity of their products. Or maybe enough consumers will be acute and pass up product "A" even though it has more bouncy needles for product "B" whose manufacturer spent more on materials and labor than he did on technically uninformed copy writers. Superlative claims may be all right for the mass market, but the serious audiofan cannot be fooled all the time.

DAVID S. MAYO, 2802 Ponce Ave., Belmont, California.



Sensational **New Advance** AM-FM Tuners h.h. Scott

330 AM-FM (Binaural) Tuner, \$169.95*


ONLY really wide-range AM, plus super-selective FM

- Now you can receive the full 10 kc frequency range broadcast by the better AM stations. Entirely new IF and detector circuits make this possible for the first time.
- New AM detector insures distortionless reception even if stations modulate to 100%. Conventional detectors give distorted AM above moderate modulation percentages.
- Three-position IF-bandwidth switch for perfect AM reception under any signal conditions.
- New wide-band FM design gives super-selectivity to let you separate stations so close together you would ordinarily pass right over them.
- Wide-band design insures drift-free reception.

TECHNICAL SPECIFICATIONS

FM Section: 3 mv. sensitivity for 20 db quieting — 2-megacycle wideband detector — 80 db rejection of spurious cross-modulation response by strong local signals — automatic gain control — equipped for multiplex. AM Section: 1 mv. sensitivity — 10 kc whistle filter — extended frequency response to 10 kc — ferriloopstick antenna — output jacks for binaural — beautiful accessory case \$9.95*

New Control Unit With Every Conceivable Feature h.h. Scott

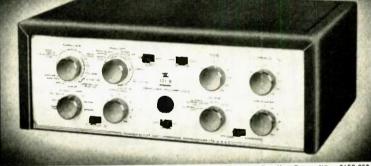

121-B Dynaural Equalizer-Preamplifier \$159.95*

Infinite equalization for any record, plus famous DNS

- Both bass turnover, and treble rolloff equalizers are continuously variable for precise compensation of any record, past, present or future.
- Amazing, patented DNS (dynamic noise suppressor) eliminates record noise and rumble, but without losing audible music, as fixed filters do. Makes worn records sound new again, protects record libraries.
- Two magnetic inputs. switched on panel, allow use of both changer and turntable.
- Finest tape recorder facilities ever offered, including Playback-Monitor switch, and three tape inputs.
- Special input channel for playback of pre-recorded tape through your music system.

TECHNICAL SPECIFICATIONS

Hum more than 85 db below full output — frequency response flat from 19 cps to 35 kc — record distortion filter — 5 high-level input controls — pickup load and pickup sensitivity controls — automatic loudness control with loudness-volume switch — provision for monitoring right off tape with three-head recorders — new construction for easy panel mounting — beautiful accessory "Slightly higher west of Rockies.

Write for FREE BOOKLET giving complete details on entire H. H. Scott line.

385 PUTNAM AVE. . CAMBRIDGE 39, MASS.



... SIGN OF QUALITY PERFORMANCE

More and more tape recorder manufacturers are displaying this tag. It identifies a Redhead-equipped unit . . . a quality unit.

Redheads provide faithful reproduction over an extended frequency range. This is the result of painstaking attention to design details: a very narrow gap for high frequency response, precision lapping for gap uniformity, a finely laminated structure for high efficiency. In addition Redheads are designed for high output, are well shielded and non-microphonic.

Whether you're selecting or designing a tape recorder, look for the Redhead. For complete information write Brush Electronics

Company, Dept. Y-10. 3405

Perkins Ave., Cleveland 14, Ohio.



Redheads are available in standard half track, and full track models.

SOME OF THE LEADING TAPE RECORDERS USING REDHEADS

Ampro "Classic", "Celebrity", "Hi-Fi, two-speed". Bell & Howell "Miracle 2000", "TDC Stereotone". Broadcast Equipment Specialties "Tapak", "Newscaster", "Narratar".

"Tapak", "Newscaster", "Narratar", Columbia Recards "Columbia Tape Recorders".

Daystrom Electric "Crestwood". Electronic Teaching Laboratories "Electro-Dual". Pentron "Dynacord".

BRUSH ELECTRONICS

INDUSTRIAL AND RESEARCH INSTRUMENTS
PIEZOELECTRIC MATERIALS • ACOUSTIC DEVICES
MAGNETIC RECORDING EQUIPMENT AND COMPONENTS



COMPANY

Division of Clevite Corporation

A Caution-and an Opinion

SIR

My attention has just been called to AT HOME WITH AUDIO in the June issue.

Please let me point out the error in the caption in Fig. 1 referring to the speaker as a "Klipschorn." The name "Klipschorn" is our registered trade mark, and the object pictured is not our product, therefore not a Klipschorn. It appears the Woofer is Electro-Voice's licensee-built Patrician. The rest of the lash up of drive components belong in a theater where the distortion and peaked response is normally overlooked since the eye, rather than the ear, is the major receptor. As for the midrange mentioned, our tests show substantially no justification for any of the claims made for it. Only direct radiators showed as much distortion.

Naturally we feel it necessary to point out the difference between the alleged "Klipschorn" and a real "Klipschorn."

PAUL W. KLIPSCH, Klipsch & Associates, Hope, Arkansas.

(Our apologies for misapplying the trademarked name. As for the last three sentences in the second paragraph, we believe them to be "one man's opinion." Both the units mentioned in the article are held in high esteem by practically everyone else. ED.)

Efficiency Again

SIR:


We have noted with much chagrin an apparent basic error made in the EDITOR'S REPORT in the September issue.

We refer specifically to the editorial which treats in extensio the padding of loudspeakers to match them in level during A-B audition tests. The statement was made that loud-speaker systems are designed by "chopping off the peaks and smoothing them into the valleys" and that the net result of a very smooth loudspeaker system is that it is inefficient. It followed from that that the conclusion was that low-efficiency loudspeaker systems were indeed smooth.

We disagree. . . It is intuitively obvious that a loudspeaker system that is 100 per cent efficient can generate no distortion. It will follow from this argument, therefore, that a highly efficient loudspeaker system with smooth frequency response is relatively distortion-free when compared to one with lower efficiency. We have borne this out in laboratory tests and we find that there is no pattern of relation between efficiency and distortion.

It is our contention, therefore, that the Entror's Report was, to a large extent, misleading, and we honestly feel based on what we consider to be, and can prove, fallacy. Since we are sure this was not the intent of the editorial, we use the term "chagrin" in our first sentence.

Please be assured that our only reason for writing this letter is that we appreciate the position of Audio as a leader in the field of disseminating information on things electro-acoustic. We, therefore, believe that information being disseminated should be as factually correct as possible. We feel that since editorial space was used to this end, an equal space presenting the other side of (Continued on page 103)

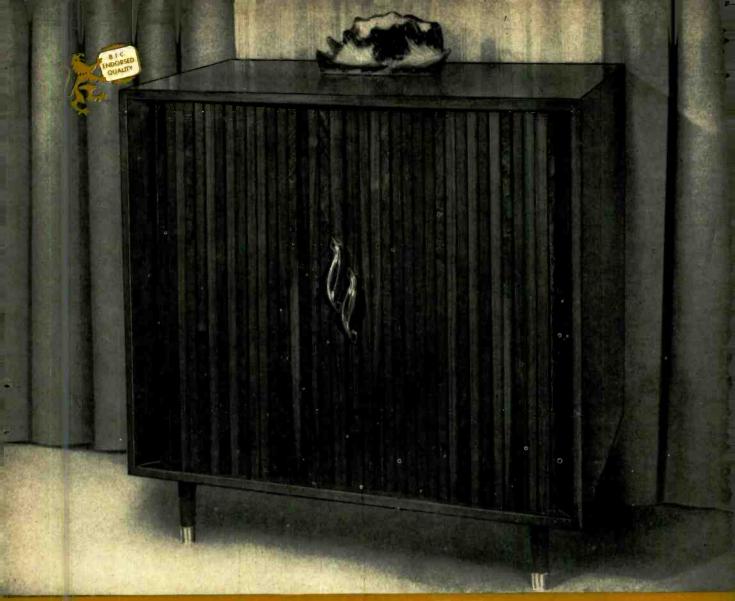


Above, you see one example of what many discriminating people have pictured in their minds . . . but have not been able to find. It is a beautifully proportioned scabinet of fine wood, craftsmanship, and finish . . . engineered specifically for high fidelity! This cabinet is designed as scientifically as your amplifier, and, at the same time, its handsome appearance is in keeping with the finest living rooms, in place of inflexible or makeshift installations.

There are more than 30 River Edge models, each affering two Important features: 1) Scientific design by audio experts, so that components fit properly into their areas, are correctly ventilated, and (in the case of speaker enclasures), the tane is developed according to the best engineering practices (2) Panels factory cut to fit your choice of components, so that you or your dealer can easily and quickly make the installation. Model 1636 (Illustrated) with tambour slide away doors, holds many combinations of components; also available as a matching TV lawbay.







Finished units by River Edge

With the help of your dealer, select from 30 basic styles and 11 finishes shown in the cotolog. Then choose your hi-fi com-ponents. River Edge will supply your cabinet with all ponels pre-cut



Low cost kits by River Edge

Though they cost little, these kits offer the same fine furniture features as River Edge finished cabinets. Component and speaker enclosures are easy to assemble, without special tools. Sonded, ready for painting.

. See your high fidelity dealer, or write for the complete River Edge catalog and dealers' names.



A quality-endorsed product of the British Industries Group: GARRARD Record Players, LEAK Amplifiers, WHARFEDALE Loudspeakers, GENALEX Tubes; R.Ipenciosures, RIVER EDGE Cabinets, ERSIN Multicore Solders.

BRITISH INDUSTRIES CORPORATION, Dept. AR10-5, Port Washington, New Work

ROMUME TURNTABLES

have set Quality Standards never before available for Home Music Systems

Through the complete concentration of its engineering facilities, Rek-O-Kut was able to develop a turntable design that was to set quality standards never before achieved for home installations. Two models first emerged from this design: the Rondine Deluxe and the Rondine. And then came the Rondine Jr. Model L-34 followed by the Rondine Jr. Model L-37.

In little less than one year, these Rondine Turntables have made broadcast-quality high fidelity a household experience. These remarkable turntables have succeeded in bringing to home music systems a type of quality that had been previously reserved for broadcast and professional recording studios.

Today, the Rondine is the most sought for turntable on the American market. It has been lauded by leading engineers; it has been praised by critical music analysts; and it has been acclaimed by thousands of music lovers who have had the good fortune to own and use Rondine Turntables in their high fidelity systems.

For Complete Details, write to: Dept. OK-1



REK-O-KUT COMPANY

38-01 Queens Boulevard, Long Island City 1, New York

REK-O-KU
38-01 Queens Boulevard,

he RONDINE DELUXE

3 Speeds: 331/3, 45 and 78 rpm

The aristocrat of turntables, the Rondine Deluxe is equipped with hysteresis-synchronous motor. Its speed is absolutely accurate and unvarying. Rumble, wow and flutter are rated better than NARTB* requirements.

\$119⁹⁵

the RONDINE

inding (2)

3 Speeds: 331/3, 45 and 78 rpm

Identical with the Deluxe, but equipped with a specially built 4-pole induction motor. Speeds are pre-regulated at the factory. Meets NARTB* specifications for rumble and exceeds them for wow and flutter.

***74**95


REK-O-KUT

Ondine

TURNTABLES

Engineered for the Studio

Designed for the Home

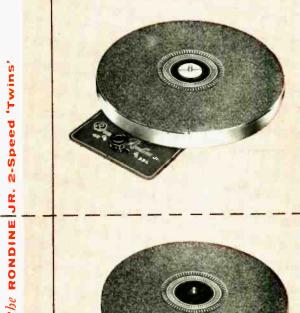

331/3 and 45 rpm

Model L-34

Model L-37 331/3 and 78 rpm

Both models operate at 2 speeds and are driven by 4-pole induction motors. These motors are the same as those used in the Rondine. These popular turntables meet all requirements specified by the NARTB*.

49⁹⁵

each

Makers of Fine Recording and Playback Equipment

* National Association of Radio and Television Broadcasters

QUAD

at 🖫 Carnegie Hall...

We proudly announce that Mr. Gilbert Briggs, sponsor of the forthcoming Carnegie Hall Audio Demonstrations, October 9th, has selected Acoustical QUAD Amplifiers for exclusive use throughout the entire program.

The QUAD was also used exclusively at the recent Festival Hall Demonstrations in London. We are honored by these further testimonials to the unparalleled performance of the QUAD Amplifier.

Mr. Peter Walker

Leading international Audio authority and designer of the Acoustical QUAD Amplifier, will attend at Room 701, Hotel New Yorker, during the New York Audio Fair.

BEAM INSTRUMENTS CORPORATION

350 Fifth Avenue, New York 1 U.S. Distributor for Acoustical QUAD Amplifiers

See your dealer or send for full information on the famous QUAD Amplifier and Beam Stentorian full range L.S.

ABOUT MUSIC

A Long Look at the Long Playing Record HAROLD LAWRENCE*

N THE EIGHTH YEAR of the long playing record, over 200 companies are in the field, hundreds of artists have made their recording debuts, the tempo of releases is more hectic than ever, advertising claims have reached hysterical heights, and duplication of standard repertoire is proceeding at a rabbit-like pace. The plump LP catalogue seems to offer an attractive and unprecedented array of performances. Yet, after sorting the highly perishable, mediocre, and barely adequate products from the prime, does the choice remainder equal in quality or quantity the glories of the pre-LP era? To the ears of Irving Kolodin in the Prefatory Note to The Guide to Long-Playing Records: Orchestral Music (A. A. Knopf), "one fact is immediately discernible . . . The total of great performances now on records is substantially smaller than it was in 1941." Interpretations of Hoffmann, Weingartner, Kreisler, Mengelberg, Rachmaninoff, Chaliapin, Sir Hamilton Harty, Caruso, Hüsch, McCormack, Koussevitzky, Schnabel-a few examples of 78-rpm vintage that come to mind-seem to bear out Kolodin's state-

Those were the days when the major companies and their international affiliates completely dominated the scene, when a recording session was generally a more thoroughgoing affair, and when the accent was on the performer, not the repertoire. Fortunately, some of these records have been transferred to LP. The most impressive re-release in recent months, for example, was the Schnabel version of the Beethoven Piano Concertos with Sir Malcolm Sargent conducting (RCA Victor, LCT 6700). Although an antiquated recording, the solotutti balance is well struck and the piano tone is remarkably realistic. As for the performance, Schnabel displayed a technical and artistic command throughout the cycle that failed to characterize his recordings of the 32 Sonatas. The most notable transfers are drawn from the RCA Victor, His Master's Voice, and to a lesser extent, Columbia catalogues, which for quite a while virtually monopolized the leading performers of the world. Exceptions include Mengelberg's Telefunken recordings, Conchita Supervia's Decca releases, Goldberg and Kraus in piano and violin sonatas, also on Decca, and a large quantity of pre-electrical vocal discs issued by Eterna.

Eventually, we hope, all superior pre-LP recordings will find their way into the current catalogue. Now, looking into the future, how many LP performances would stand a chance of surviving in the next era of recording, whether it be lateral/hill-and-

dale, perforated card, or recorded tape on a large scale? Here are some recommendations for LP's Hall of Fame.

Trying to decide between a pair of recordings of a complete opera, each of which contains strong and weak points, would be impossible without employing the point system. The leading soprano in set A sings with perfect intonation and phrases intelligently. Her counterpart in set B, however, captures more of the spirit of the role. The tenor in set A has an unusual dramatic sense while set B's tenor is more restrained . . . etc. It is a rare event indeed when an eminently qualified cast of singers and conductor can be assembled on an operatic stage, or (a far more difficult task) in a recording studio for a fully satisfactory performance, especially when more than four principals are involved. At least eight such events have taken place on LP. Two were derived from "actual performances": Berg's Wosseck (Columbia SL 118), and Wagner's Parsifal (London LLPA 10). The first was taken from a concert version of the opera conducted by Mitropoulos and recorded in Carnegie Hall. The second is a composite of several performances given during the Bayreuth Festival in 1951. (Both are remarkable for their well-behaved audiences; coughing and sneezing are at an absolute minimum.) The other operatic nominations are Berlioz' The Damnation of Faust (Munch, Victor LM 6114), Mussorgsky's Boris Godounov (Dobrowen, HMV 6400), Ros-3529 B), Bellini's I Puritani (Serafin, Angel 3502 C), Falla's La Vida Breve (Halfter, Victor LM 6017), Wagner's Tristan und Isolde (Furtwängler, Victor LM 6700), and on a smaller scale, Cimarosa's Il Maestro di Capella (Amaducci, London LD 9118).

In the orchestral repertoire, the LP era has employed the services of a number of conductors who have been around for some time: Toscanini, Walter, Beecham, Mitropoulos, Kleiber, Furtwängler, Monteux, etc. Unfortunately, too little of Beecham's microgroove output is happy in its choice of repertoire or quality of reproduction. By far his finest efforts are on behalf of out-of-the-way pieces such as Bantock's Fifine at the Fair (LHMV 1026), Lord Berner's The Triumph of Neptune (Columbia ML 4593), and Delius' North Country Sketches (Columbia ML 4637). London's ambitious recording of all Vaughan Williams' symphonics conducted by Sir Adrian Boult, under the composer's supervision, deserves high praise. So does Bartók's Miraculous Mandarin as con-



"SCOTCH" BRAND JUGGLES ATOMS to produce the finest long play magnetic tape!


Years ago "SCOTCH" Brand pioneered modern magnetic tape-and solved a knotty technical problem at the same time. The problem? How to produce recording tape with a uniform, magnetically-responsive oxide surface for finest recording results.

"SCOTCH" Brand does it by making its own oxide coatings. It's a difficult job and only "SCOTCH" Brand does it - splitting atoms to transform unmagnetic oxide into a super-magnetic coating sensitive enough to record even a whisper! But this extra work is worth the effort, as you'll hear yourself. Today-listen to a reel of new "SCOTCH" Brand

Extra Play Magnetic Tape 190. It offers you 50% more recording time on a standard-size reel, plus complete fidelity and purity of sound.

Electron photo microscope shows the difference!

At left, artist's conception of magnified view of old-fashioned oxide coating. At right, "SCOTCH" Brand lays on its own regularshape, super-magnetic particles to give you a super-sensitive recording surface.



SCOTCH Extra Play Magnetic Tape 190 with 50% more recording time





The term "SCOTCH" and the plaid design are registered trademarks for Magnetic Tape made in U.S.A. by MINNESOTA MINING AND MFG. CO., St. Paul 6, Minn. Export Sales Office: 99 Park Ave., New York 16, N.Y.

NOW...ADD TAPE to your hi-fi system!



the 404

DAYSTROM Crestwood®

is engineered to give highest quality sound at lowest cost

Now you can enhance the enjoyable hours with your "Hi-Fi" system by completing it with the greatest form of musical reproduction—true high fidelity tape. And you can do it at a surprisingly low cost.

The Daystrom CRESTWOOD 404 Tape Recorder alone, in its price class, provides full "Hi-Fi" response (30 to 15,000 cycles at $7\frac{1}{2}$ inch tape speed), smoothest tape movement, freedom from vibration, the absolute minimum of wow and flutter (less than 0.3% at $7\frac{1}{2}$ inch tape speed) and two speeds ($7\frac{1}{2}$ and $3\frac{3}{4}$) for maximum versatility.

Original sound quality is preserved by use of the finest components, and playback characteristics are not limited by a built-in amplifier. As a result, the full range of your "Hi-Fi" System is utilized.

Listen to the Daystrom CRESTWOOD 404 at your dealer's today. Compare and let your ears tell you the difference!

Audiophile Net Prices

Model 404 with standard case . . \$229.50
Model 404 less case . . . \$214.50
Model 402 (companion power amplifier and
extended range speaker) . . \$100.00
(Prices slightly higher in Denver and west)

DAYSTROM

<u>Crestwood</u>

DAYSTROM	ELECTRI	C	CORF
POUGH	KEEPSIE.	N.	Υ.

-	DAYSTROM ELECTRIC CORP. Dept. 1-29 753 Main Street, Poughkeepsie, N. Y.
	Please send me complete information
,	on Daystrom CRESTWOOD Model 404.
	☐ Would use in "Hi-Fi" System
	☐ For use with 402 Amplifier and Speaker☐ Name of nearest CRESTWOOD dealer
	Name
	Street
	CityState

ducted for Bartók Records by Tibor Serly. The much-abused term, "definitive performance," well describes Bruno Walter's interpretation of the Mahler First (Columbia SL 218). Other definitive performances on LP are Stravinsky's recordings of the Octet and L'Histoire du Soldat (Columbia ML 4964), and Pulcinella (Columbia MI. 4830).

An "irreplaceable" in the LP catalogue is Backhaus' Carnegie Hall recital of 1954 (London LL 1108/9) where the German pianist displays all the mastery of his studio recordings with an added sense of concert exhilaration. In the realm of chamber music, the later volumes of Haydn's String Quartets played by the Schneider Quartet (Haydn Society), Beethoven's Quartet for Piano and Woodwinds, Op. 16 with Rudolf Serkin and members of the Philadelphia Wind Quintet (Columbia ML 4834) and Bartók's Sonata for Violin Unaccompanied, brilliantly tossed off by Robert Mann, (Bartók 916) are exceptional recording projects.

A pair of chamber orchestras have contributed some memorable discs to the LP repertoire. They are I Musici and the London Baroque Ensemble. The latter's recording of Dvořák's Serenade in D, Op. 44 (Decca DL 7533) is perfect in every way. As for the vocal literature, the following should be noted down: Lisa della Casa in an ideal interpretation of Richard Strauss' Four Last Songs (London LD 9072), Leslie Chabay's warm, sensitive performance of Bartók and Kodály arrangements of Hungarian folk songs, and the idiomatic feeling of the recordings of Mediaeval and Renaissance music by the Pro Musica Antiqua under Safford Cape (EMS).

The above are, of course, merely a few highlights of the long playing record era. These, and others like them, are exceptions in a catalogue where many of the best recordings display abundance of technique more often than profusion of "style," that precious ingredient that characterized the piano playing of a Hofmann, the singing of a Chaliapin, or the flair and authority of a Mengelberg.

Employment Register . . .

Positions Wanted and Positions Open are listed here at no charge to industry nor to individuals who are members of the Audio Engineering Society. Positions Wanted listings from non-members are handled at a charge of \$1.00, which must accompany the request. For insertion in this column, brief announcements should be sent to AUDIO, P. O. Box 629, Mineola, N. Y. before the fifth of the month preceding the date of issue.

• 26 Years Experience, all phases design and development of audio amplifiers and systems, power supplies, modulators, P.E. equipment, power and audio transformers and chokes, disc recording and intercoms. Available part time. Lester Levy, 535 Parkside Ave., Brooklyn 26, N. Y.

You Can HEAR High Fidelity



There are some who can look at the composer's notations and 'read' the music, and there are those who can 'visualize' the performance of a high fidelity music system from a set of plotted curves and figures.

Most of us, however, as spectators, must be content with listening. And that is as it should be. Music and high fidelity were both created for our *listening* enjoyment. And we can only enjoy the sensations of sound when we *hear* the sound.

This important task of creating (or re-creating) the sound in a high fidelity system is entrusted to the loudspeaker. So that, however fine the other components may be, unless the loudspeaker is capable of reasonably faithful reproduction of the original sound, you never can *hear* high fidelity.

It is for this reason that we ask you to *listen* to the Goodmans Axiom 22 or Axiom 150...housed in a suitable enclosure and connected to a high quality music system. You are due for a delightful surprise. You will *hear* high fidelity as you always imagined it would sound...clean, satisfying, and as realistically faithful to the original as a reproducing system is capable of providing.

Complete Service Facilities maintained for your convenience



MARK II \$5350*

GOODMANS
12" LOUDSPEAKERS

MADE IN ENGLAND

Hear the Axiom 22 and Axiom 150 of your favorite sound dealer, or write for literature **Prices slightly higher on west coost

ROCKBAR CORPORATION, 215 EAST 37th STREET, NEW YORK 16, N. Y.

In Canadar A. C. Simmonds and Sons, Ltd., Toronto, Ontario

Pilot this is

DESIGNED 10 BULLES ONY STRIONS 140H 1HT 801...

PILOTUNERS

AM-FM AND FM TUNERS

Proud examples of Pilot skill in the design and development of critical circuitry.













PILOTONE AMPLIFIERS

Used with the famous Pilotuners these quality amplifiers provide matchless loudspeaker performance. Those with built-in preamps can be used directly from hi-fi phono pickups

PILOT is one of the oldest and largest manufacturers of audio components . . . with more than 35 years experience in the electronics of radio and sound. It follows, quite naturally, that the Pilot name should be identified with the finest high fidelity components and component systems.



AA-410 \$49.50

A Williamson-type amplifier that has gained wide acclaim. Its peak out-put of 20 watts is ideal for home systems. Low distortion accounts for its excellent listening quality.



AA-903 \$69.50

Another wonderful Pilot hi-fl value with 10 watts of peak power and featuring a complete phono-preamp-lifier as well as bass and treble tone controls. The AA-903 has been selected the 'best buy' in the field.



AA-905 \$129.50

Represents the very utilimate in en-gineering skill. Combines a William-son-type circuit and rugged KT-66 output tubes with traditional Pilor 'know-how' to achieve 45 watts peak output with low distortion Built low di output with low distortion. Built-in preamp has full equalization and tone controls.



AA-904 589.50

Williamson-type circuit using KT-66 output tubes. Provides up to 30 watts peak power with minimum distortion. There is hardly a system that would not benefit from an AA-904.



AA-420 \$99.50

masterpiece of compactness and performance, this unit provides 20 watts of peak power. Has built in preamp-equalizer and tone controls. A favorite among those who require quality space-saving units



AMPLIFIER COVERS \$4.95 each These perforated steel covers greatly

enhance the appearance of Pilotone amplifiers. They also protect tubes and other parts. Particularly desirable where amplifier is to be kept in full view.

Prices slightly higher West of Rockies.

HIGH FIDELITY

3-ON-1 COMPONENT CHASSIS ▼



THE PILOTROL >



Among high fiderity enthusiasts, there are those who will have nothing but the finest cossible equipment who will deem no unit worthy of their consideration unless it approaches or even surpasses the performance associated with professional broadcas only point. The Priotrol Audio Control Units designed for just such critical users. I has virtually every desirable feature on would want in a versatile preamplifier equalizer tone control unit, including a component pages on the prior point of the prio

Not only is it orcaided with a amplete set of push-button controls for both furnover and rolloff equalization, but also has push-button selectors with jewelled lights indicating the selected channel. A professional type decibel mater is incorporated for direct roading of output levels. The Pilofrol is furnished in a Mahogany cabinet. Limed Oak available at slightly higher cost.



Ensemble MODEL PT-1030

A complete hi-fi phono system, ready for use by simply plugging in. The Ensemble has a 3-way speaker system using 4 speakers, the famous 'best-buy' Pilotone AA-903 amplifier, preamplifier, Garrard RC-80 record changer and facilities for auxiliary speakers, tape recorder, radio tuner, etc.



THE ENCOVE MODEL PT-1010A. \$159.50

DETACHABLE LEGS, PER SET \$4.95
A complete, portable phonograph system in a sturdy case equipped with carrying handle, and covered in leather-grain vinyl plastic. Also doubles as a chair-side unit by simply attaching 4 legs, available as optional equipment.



COMPONENT-CONSOLE PHONOGRAPH SYSTEMS >

These represent a new idea in nigh fidelity in which are combined—Component Quality with Console Convenience. Each unit is made up of Pilot Hi-Fi components—manufactured and selected by Pilot—matched and assembled by Pilot—engineers—and housed in decorous cabinetry for the home.



Encore MODEL PT-1020A

A luxurious table top phonograph, housed in a hardwood cabinet. This unit comes in a choice of two finishes to match your home decor. Modern wrought iron legs (optional) convert the 1020A into a convenient chairside system.



More than 35 years leadership in electronics



Plan your home music system with Pilot Hi-Fi Components or Component-Console Units. See your sound dealer or write for complete specifications.

PILOT RADIO CORPORATION

Dept. EK-1, 37-06 36th St., Long Island City 1, N.Y.

EDITOR'S REPORT

AUDIO FAIR SEASON

Hose of us who enjoy andio shows of any and all types—big ones, little ones, and those which exist throughout the year in the distributors audio showroonts—are beginning to get excited about the prospect of the next few months, for as this issue comes out there is the High Fidelity show in Chicago and simultaneously the Third Annual High Fidelity Audio Show at the Sheraton-Palace Hotel in San Francisco (the Hi-Fi Home Music Show at the Claremont Hotel in Berkeley, just across the bay from San Francisco, having closed on September 25 after its three-day run), and then comes the big Audio Fair in New York on October 13, the New England High Fidelity and Music Show at the Hotel Touraine in Boston commencing on October 21 and running for three days.

Next on the schedule is the Philadelphia High Fidelity Show at the Benjamin Franklin Hotel, November 4-6, and at the same time the First Mexican Audio Fair is being held in the Hotel Reforma in Mexico City.

Practically no one could attend all of them—though some of us try—but the more enthusiastic audio people

will get to as many as possible.

The greatest of the shows so far has always been The Audio Fair, and its seventh showing starts on Thursday, October 13 at Hotel New Yorker in New York City. Even though if a manufacturer may not be able to attend all of the exhibits—he is most sure to have his wares on display at the New York show, for that is the place where everyone comes, or so it seems. At any rate, it is this show to which the overseas buyers flock in numbers to see what is on the market and to hear the best that the audio industry has to offer. Perhaps many of these "buyers" are actually engineers who come to see and hear what we have so that they might try to better it, but we should be willing to accept this sort of competition—we will gain in the long run, for we will have the better equipment.

No two audio shows are alike—fortunately—and there is always enough of interest and always enough variety to keep us entertained. And among the many thousands of visitors to the shows we are certain to meet many of our old friends—in our own case, we have an opportunity to talk with AUDIO's readers and hear first-hand what they want in their favorite magazine. So in addition to learning about the newest in equipment, we also glean some ideas which prove of value in selecting material for the magazine. We hear complaints and compliments—we try to eliminate the causes of complaints, and we try not to become complacent about the compliments. In any case, we listen to both equipment and people with open minds with the hope that what we learn from both will be reflected in a more interesting and useful magazine.

FIRST MEXICAN AUDIO FAIR

On our way back from the WESCON show in San Francisco, we "happened" to come by way of Mexico City, since we had heard there was to be an Audio Fair in that city next month. In addition to being entertained most royally, we had the opportunity of meeting most of the audio industry in Mexico, and we find them to be just as enthusiastic about good music reproduction

as we are here in the States. For example, the first Audio Fair is to have some thirty five exhibitors-many of whom are displaying U. S. and British equipment, to be sure, but there is a rapidly growing list of manufacturers in Mexico, and even now much of the equipment to be shown is built below the border. We were pleasantly surprised by almost everything we saw-from the architecture to the beautiful women of that city-and while we had no intention of going back for the three days of the show itself, we were forced to change our mind. It is safe to say that the welcome extended to anyone interested in audio would make it well worth while to visit the show-even as a mild excuse to see Mexico City. We have mentioned this to several friends in the business since returning, and some of them are planning to attend. As we are,

POSTPAID REPLY CARDS

After seven months of including reply cards in the back of the magazine, we are convinced that you find this service to be of considerable value, and we thank all of our readers who have availed themselves of the opportunity to request more information with a minimum of effort. Accordingly, this service will be extended with the November issue to provide identification for the display advertising so that it will only be necessary to circle a number to get further information about any of the products that are advertised, in addition to those that are mentioned in the New Products and New LITERATURE pages. This, we believe, will make the service even more useful to you, and will make it so much easier to obtain the desired additional information that still more of you will send in your inquiries. How do we know that you like the service? Simply by counting the inquiries received every month—just over twenty per cent of you have responded. We trust you will continue to show interest in the products of our advertisers, and that as your interest grows your inquiries will mount until one hundred per cent of you ask for more informa-

The 3rd Audio Anthology

Many readers will be glad to know that the 3rd audio anthology will be off the presses by the time of the New York Audio Fair. We have been receiving requests for this volume for over a year, and we have finally gotten it put together. Same size, same number of pages, but slightly higher in price—both printing and paper are more expensive now than they were three years ago when the 2nd audio anthology was published.

BRIGGS' LECTURE DEMONSTRATION

There's still time to get tickets for the hi-fi lecture demonstration to be presented by Gilbert A. Briggs at Carnegie Hall on Sunday October 9, at 3:00 p.m. (Note that it is not Town Hall, as announced on this page last month.) Mr. Briggs will be assisted by P. J. Walker, and the music, both live and recorded, will be provided through the cooperation of Columbia Records, Inc. This is the first of these demonstrations to be presented in the United States, and no serious audiofan or music lover should miss it. Remember the date—Sunday, October the ninth, at 3:00 p.m.



THE FLUXVALVE PICKUP

the first really new pickup in a decade

The FLUXVALVE is made by perfectionists — for perfectionists. Literally the cartridge of the future, its unique design meets the demands of all presently envisioned recording developments, including those utilizing less than 1 mil styli.

There is absolutely nothing like it!

The FLUXVALVE Jurnover Pickup provides the first flat frequency response beyond 20kc! Flat response assures undistorted high frequency reproduction—and new records retain their top "sheen" indefinitely, exhibiting no increase in noise. . . Even a perfect sylus can't prevent a pickup with poor frequency characteristics from permanently damaging your "wide range" recordings.

With this revolutionary new pickup, tracking distortion, record and stylus wear are reduced to new low levels. The FLUXVALVE will last a lifetime! It is hermetically sealed, virtually impervious to humidity, shock and wear... with no internal moving parts.

The FLUXVALVE has easily replaceable styli.

The styli for standard and microgroove record-playing, can be inserted or removed without use of tools.



For a new listening experience, ask your dealer to demonstrate the new FLUXVALVE ...words cannot describe the difference...but you will hear it!




PICKERING & CO., INC.

Oceanside, N.Y.

PIONEERS IN HIGH FIDELITY


"For those who can hear the difference"

. . Demonstrated and sold by Leading Radio Parts Distributors everywhere. For the one nearest you and for detailed literature; write Dept. W.9

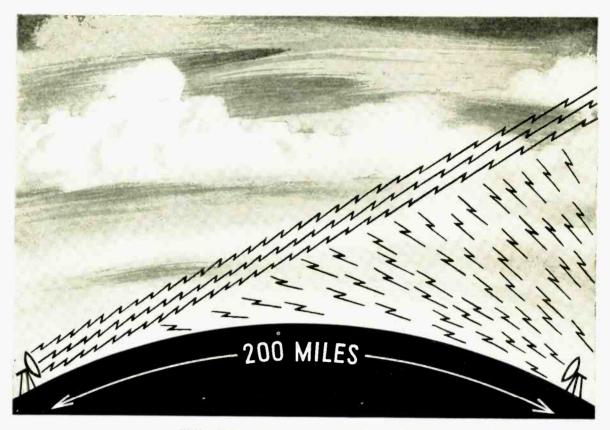

Highly schematic drawing illustrates the possible distribution of energy in ultra-high-frequency "overthe-horizon" transmission. The effect is similar to that of a powerful searchlight whose beam points into the sky. Light can be seen miles away from behind a hill even when the searchlight lens is invisible.

Something new on the telephone horizon



This experimental 60-foot antenna (rearview) photographed at Bell Laboratories in Holmdel, New Jersey, is designed for study of "over-the-horizon" phenomena.

Telephone conversations and television pictures can now travel by ultrahigh-frequency radio waves far beyond the horizon. This was recently demonstrated by Bell Telephone Laboratories and Massachusetts Institute of Technology scientists using "overthe-horizon" wave propagation, an important recent development in the radio transmission field.

This technique makes possible 200mile spans between stations, instead of the 30-mile spans used for present lineof-sight transmission. It opens the way to ultra-high frequencies across water or over rugged terrain, where relay stations would be difficult to build.

In standard microwave line-of-sight transmission, stations are so spaced that the main beam can be used. But now, with huge 60-foot antennas, and much higher power, some signals drop off this main beam as it shoots off into space. These signals reach distant points beyond the horizon after reflection or scattering by the atmosphere. The greater power and larger antennas of the "over-the-liorizon" system permit recapture of some of these signals and make them useful carriers. The system will be a valuable supplement to existing radio relay links.

BELL TELEPHONE LABORATORIES



Improving telephone service for America provides careers for creative men in scientific and technical fields.

Cascode Preamp Improves Signal-to-Noise Ratio

M. V. KIEBERT, JR.*

A thorough study of the causes of noise in electronic equipment points to the steps necessary to reduce unwanted disturbances to an absolute minimum.

HIS PROJECT GREW out of a design request to develop a preamplifier suitable for use with the Fairchild Type 215 moving coil pickup. The original pickups had an average maximum output of .003 volts across a nominal output impedance of 60 to 80 ohms (it is understood that with the new type 220 units, this output has now been increased to .006 volts, about half the output of the higher impedance G.E. pickup). The manufacturer also set out a requirement that the preamplifier should, if at all possible, avoid the use of an input transformer (and so necessitated a higher gain system) while being adaptable, without modification. to the use of higher level pickups.

Consideration was given to the fundamental problem of desired and required noise levels. Good discs are now available and turntables have improved to the point where a dynamic range of 50 to 60 db below maximum output, was desirable. This means that a preamplifier to be used with a pickup of .003-volt output must be so designed and constructed that equivalent grid input noise voltage level must be held to no more than 3 microvolts if a 60-db dynamic range is to be accommodated.

Noise in the input stage (aside from hum, microphonics and spurious induced voltages from the filament circuit and/or other adjacent voltages and/or from capacitive charges on the tube enve ope and getter surfaces) is due to six principal causes—thermal (Johnson) noise in the grid (input) circuit, tube noise (shot effect), partition noise, flicker noise, "current" noise in the plate load resistor (and perhaps cathode resistor) of the first stage, and spurious transient plate-supply-voltage variations. Under normal circumstances and in the most generally encountered conditions of operation of well designed multistage amplifiers, the first stage noise is the limiting noise source in the system. Hence, consideration must first be given to the fundamental limitations of this stage and the engineering techniques which are under control of the design engi eer and which may he employed to minimize undesirable noise sources in this stage.

Other noise problems that must be considered in the final design will, of necessity, evaluate the ballistic and microphonic characteristics of the input stage, as well as problems of stray induced hum and noise voltages. Flicker noise as results from the time-variable evaporation characteristics of electrons from a cathode surface are only under control of the designer insofar as he may select one type of tube class from another—that is, use of a 12AY7 in place of a 6AU6, for example, and then subsequent experimental selection of the minimum noise level tube (most stable cathode surface tube) from a number of tubes of the type used in this position.
"Current" noise in the plate load

resistor (and perhaps the cathode resistor) may be kept to a minimum through the use of wire wound, or

¹ M. V. Kiebert, "A preamplifier switch-

*M. V. Kiebert, A preampliner switching and equalizing unit for critical listening," Audio Engineering, Sept. 1952.

*M. V. Kiebert, "The Williamson-type amplifier brought up to date." Audio Engineering, Aug. 1952.

special, low noise resistors as previously described.1, 2

While the basic thermal or Johnson noise and shot-effect noise problems get into the field of quantum mechanics, this problem has been well documented in the literature although minor unresolved points of view still exist.3.4. However, a brief outline of the cogent factors may be in order.

Limiting Factors


In any transducer system, such as a microphone or pickup, a certain signalto-noise ratio is intrinsic to the particular system as determined by the ratio of the transducer (microphone or pickup, for example) signal output voltage to the magnitude of the transducer thermal noise voltage as determined by

3 F. E. Terman, Radio Engineers Hand-

book, first edition, pp. 476–477.

4 H. J. Woll and F. L. Putzrath, "A note on noise in audio amplifiers." Trans. IRE PGA, March-April 1954, Vol. AU-2



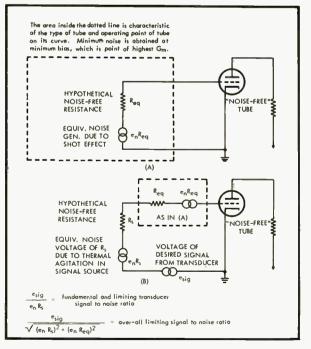

^{*} Applied Research, Inc., c/o Booz, Allen & Hamilton, 135 S. La Salle St., Chicago,

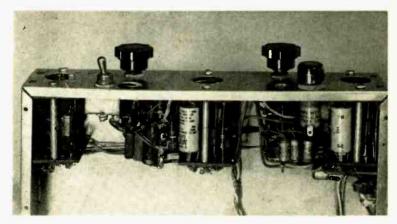


Fig. 3. Preliminary prototype of preamp of Fig. 2.

the resistive component of the signal source (transducer). Using an amplifier following such a transducer, this fundamental limiting signal-to-noise ratio can never be improved (if the bandwidth is held constant), it can only be approached. If the signal output is not large enough to be above the noise generated within the first amplifier tube, a transformer may be used to boost the signal to a sufficient level before it is impressed on the grid. A low signal device will have a small internal inpedance (to give an acceptable signalto-noise ratio) which will allow a large step-up ratio on the transformer to give a correspondingly large signal at the grid. This allows operation at a sufficiently high ratio of signal level to tube-noise level.

Noise is generated in the resistive component of any impedance by the thermal agitation of the electrons. The magnitude of thermal (Johnson) noise voltage of a resistance in temperature equilibrium is:—

$$e^{n^2} = 4kTRB$$

where

k = Boltzmann's constant

T = temperature in degrees Kelvin

B = bandwidth in cps.

At nominal room temperature, 63° F. or 17° C., this may be expressed as:— $en^2 = R\Delta f \ 1.6 \times 10^{-20}$

 $e_n = rms$ noise in microvolts.

A convenient way to express and handle the "shot-effect" noise of a tube is in terms of an equivalent noise resistance, Req, at room temperature, connected from grid to cathode of an idealized, noiseless, equivalent tube.

The value of R_{eq} for triodes (in conventional or cascode connection) is given approximately by

$$Req \approx \frac{2.5}{G_m}$$

where: Req = the equivalent noise resistance in ohms.

Gm = the mutual conductance

at operating point. The equivalent circuit for this is shown in Fig. 1. From the foregoing it is apparent that the highest possible mutual conductance at the operating point (a fairly high plate current and relatively low bias voltage) will reduce the shot-effect noise to a minimum. Triodes in common use have published values of Gm at the operating point of from 1000 to 5000 with resultant Red's from 2500 to 5000 ohms.

For this particular preamplifier, or for any similar low-noise-level design application, some other generalizations may be made which will provide a guide as to the best design procedures and will give a general clue as to other potentialities which must be considered for a particular design.

Practical Considerations

Pentode input stages provide high gain (approximately Gm RL) and effectively isolate the output from the input circuits but have inherently higher noise levels due to the partition noise caused by division of the cathode current between the plate and screen relatively low gain (approximately $G_m R_L R_p/(R_p + R_L)$), and a fundamentally lower noise level because they avoid the partition noise found in screen grid tubes. The undesirable and unavoidable coupling between input and output circuits as resulting from the intrinsic grid-to-plate capacitance is the liability of the triode stage. The effective capacitance resulting from this is increased as the stage gain is increased by employing tubes with a higher mutual conductance and lower plate resistance. Thus it is impossible to get

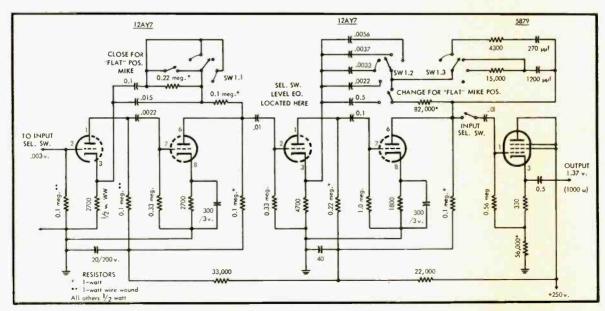


Fig. 2. Original preamp circuit, with input and interstage level equalizing circuits omitted for simplicity

around this interelement coupling problem so the triode stage is always a lowgain stage if a wide-band frequency

response is desired.

The cascode input stage is unique in that it has the general noise characteristics of a triode, provides isolation between input and output circuits comparable to a pentode, and has relatively high gain (which is comparable to that obtained with a pentode—approximately Gm RL). These performance features are achieved at only the cost of another triode section which may be in the same tube envelope as the first triode section. The merits and potentialities of this type of circuit are only starting to get recognition in the audio field, although the circuit has been widely used in radar applications, television tuners, and more recently in television camera video circuits. 5, 6, 7, 8

Tube Choice

For preliminary consideration of an optimum, specific preamplifier to be used with a low-level, low-impedance pickup, it was assumed that d.c. was to be used on the filaments and that stray hum and spurious (a.c.) coupling was not a prob-lem. A bandwidth of 15 kc was used as a reference and a zero grid input impedance was used in order to evaluate separately the tube "shot effect noise" (the nominal Reg), and separate this phenomena from the input thermal (Johnson) noise. Under this condition of operation, pentode connected 5879's had an average of 3.6µv equivalent-gridinput tube noise (best tubes); while triode connected, they had an average of 2.2µv. The 12AY7 triode (best tube) had a 0.9µv equivalent-grid-input noise

⁵ Valley & Wallman, Vacuum Tube Am-

bifiers. McGraw-Hill, pp. 656-660, 1948.
K. B. Benson, "Modified preamplifier improves movie telecasts." Electronics, Vol. 26, No. 12, pp. 166-169, Dec. 1953.
Application Note on Type 6198 Vidicon Television Camera Tube. RCA Tube Deserted.

partment.

⁸R. Lee Price, "The cascode as a low-noise amplifier." Trans. IRE PGA, March-April 1954, Vol. AU-2, #2.

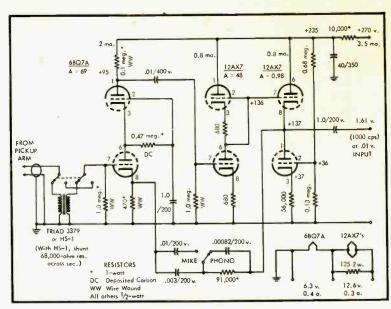
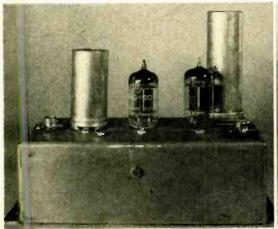


Fig. 4. Schematic of the cascode preamplifier.

under similar conditions-a value more nearly in line with the permitted maximum of 3µv when other noise sources are considered. A cascode stage using 6BQ7A's or the GE 6386 or 5670's (basing different than 6BQ7A) has about 0.6µv,—an even more tolerable level. (The 6BQ7A however, varies quite widely from tube to tube as regards microphonic sensitivity)

Under the above conditions of operation the 5879 pentode had a gain of about 105; when connected as a triode the 5879 gain was about 14; a 12AY7 triode section had gains of about 18 to 26, while the 6BQ7A had gains of about 46 to 70. These gains were those nominally obtained under optimum operating conditions for minimum noise and the required bandwidth.

The final basic tube noise to be evaluated was the thermal noise in the grid input circuit. For a 15-kc bandwidth and a 0.1-megohm source at room temperature (63° F., 17° C.), this noise is about 4.9µv which is obviously above the maximum permissible 3µy limit if the input is .003 volt and a 60 db dynamic range is required. Under similar circumstances a 10,000-ohm source will have a noise of about 1.55µv while a 100-ohm source will have a noise of about 0.155µv. In general if tube noise (shot effect) is the principal limiting noise source, as is generally the case. the over-all system signal-to-noise ratio improves as the signal impedance resistive component increases, provided this is accompanied by a corresponding increase in signal voltage as available with a coupling transformer, and further provided that this signal source impedance is at least two times, and preferably four times, Req, the equivalent noise resistance due to shot effect. If this ratio is achieved, then input cir-



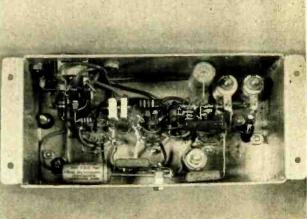


Fig. 5. External and under-chassis views of the cascode preamplifier of Fig. 4.

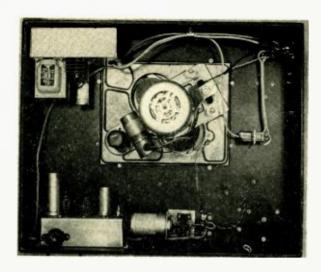


Fig. 6. Installation of preamp and associated power supply in turntable cabinet. Input transformer and switches are located just to the right of the preamp chassis.

cuit thermal noise is not a limiting factor. This, unfortunately, means that lowvoltage, low-impedance input devices with the resistive component in the same order of magnitude, or less than Req. must always employ transformers in order to secure the optimum, or even satisfactory signal-to-noise ratios when feeding into a preamplifier. The use of a low-impedance, low-level signal source not provided with a suitable step-up transformer will generally result in a signal-to-noise ratio ratio limited by tube noise. A high-impedance, low-level signal source will generally result in a signal to noise ratio limited by thermal noise.

Low-impedance pickups and microphones generally have intrinsically satisfactory dynamic ranges when used properly. It is however, always prefer-able to use a "high impedance" (and higher signal voltage) device as the input source if the use of an input transformer is to be avoided as a means of reducing cost, reducing size and/or reducing susceptibility to transformer

hum pick-up from stray magnetic fields. From the foregoing, it is apparent that either a triode preamplifier or a cascode preamplifier will give the best (and comparable) signal-to-noise ratios on low level signals; that wirewound or special low-noise plate load resistors should be used; and then under these circumstances a residual equivalentinput-stage grid-noise level in the order of approximately 1 to 2µv may be obtained if all other noise sources due to stray hum, microphonics, flicker, line "bumps," etc., are negligible. This all adds up to the fact that a direct input, low-voltage, low-impedance signal source to the grid of a preamplifier is not good engineering design; that only under unusual circumstances and very careful design can a usable 55 to 60 db dynamic range be obtained. Either a higher impedance, higher voltage source or an input impedance-matching transformer should always be used for optimum performance under these circumstances.

For example; a 12AY7 operated under optimum conditions had an Req of 2960 ohms. When an impedance matching transformer, inserted between a 60-80 ohm pick-up and the input grid of a preamplifier was used with a nominal output impedance of 12,000 ohms. the output voltage was approximately 42 millivolts in lieu of the original 3 millivolts and a potential signal-to-noise ratio (limited by shot effect) was 82 db. When no matching transformer was used the limiting noise level was established by thermal noise and the potential signal-to-noise ratio was 69 db-an obvious marginal and difficult level to achieve when other potential circuit noise sources such as flicker, etc. must also be considered.

Aside from the three foregoing fundamental and limiting sources of input stage noise are other sources of potential noise influence which must be considered in the design of a low-noise-level, high-gain system. These secondary sources of noise which are normally encountered in the design of such a system are:-

- 1. Flicker effect as may result from periodic variations in cathode emission, a low-frequency phenomenon.

 2. Cathode-heater leakage (ohmic) which
- will couple a.c. components of the fila-
- ment voltage into the cathode circuit.

 3. Cathode-heater capacitance which will couple a.c. components of the filament voltage into the cathode circuit.
- 4. Tube press or seal leakage which may couple a.c. components of the filament voltage to any tube element. This may occur either as a volume or surface phenomena.
- 5. Modulation of the electron stream by external magnetic fields.
- 6. Modulation of the tube electron fields by tube envelope surface charges, which may or may not be additionally influenced by the "getter" deposit.
- 7. Tube microphonic characteristics.
- 8. Grid current noise.

Tube selection-that is, use of tubes specifically designed for low level audio use-will practically avoid or at least minimize many of the rather formidable sources of potential secondary noise listed above. Flicker effect, seal leakage, cathode-filament ohmic leakage and grid current noise will generally not be the limiting and/or significant factors when selected tubes, or when tubes of the 1620, 12AY7, 5879, or similar classes of tubes are used. The other items must be carefully considered and a specific design provided for each particular application or installation. Shock mounting, for example, will obviously be required if the tube is operated in any appreciable acoustic, shock, and/or vibrational field.

The effect of heater-cathode capacitance, taking a 12AY7 tube as an example, is to couple approximately 4µv per volt of a.c. component of heater voltage per unf of capacitance existing between heater and cathode. Grounding or heavy bypassing of the cathode will

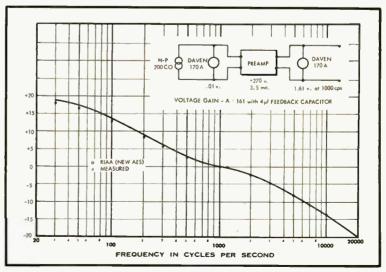


Fig. 7. Required RIAA curve compared with measured response.

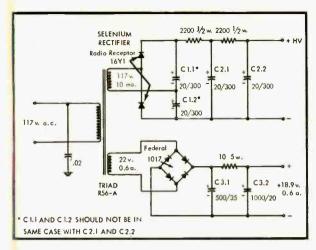


Fig. 8. Power supply for preamplifier and equalizer.

minimize this source of difficulty. The use of a rectified and filtered d.c. heater supply, even though the filtering is not too complete (a residual of 0.3 volt appears to be reasonable and satisfactory) will provide a 20 to 26 db attenuation of hum from this source and readily permit practical use of an ungrounded and unbypassed cathode circuit as may be desirable to provide for some form of feedback, reduce the number of circuit components and/or provide for miniaturization in the preamplifier unit.

Modulation of the tube electron field by tube envelope surfaces charges may be reduced to vanishingly low levels by use of a grounded metallic tube shield.

In order to secure optimum signal-tonoise ratios with low level signals it is
essential to avoid "losser" type (RC and
RL) equalization prior to the first-stage
grid circuit. It is for this reason that
both low-frequency and high-frequency
compensation has generally been employed by this author in the same
feedback section of the circuit (which
makes it easy to use this circuit also
as a "flat" microphone circuit by merely
adding a 0.1-nf capacitor and a SPDT
switch which inserts it across the nor
mally lower capacitance low-frequency
equalizing capacitor while simultane-

ously removing the high-frequency capacitor from the circuit). Feedback equalization rather than "losser" type interstage equalization serves to keep distortion to minimum levels under wide variations in input level. This readily permits use of input voltages of .003 to 0.1 volts in the cascode preamplifier to be described. Use of this type of equalization normally reduces distortion 10 to 20 db at nominal operating levels.9

The first preamplifier which the author designed for minimum noise and maximum performance with a triode circuit utilizing 12AY7's, is shown schematically in Fig. 2, and a preliminary prototype is shown in Fig. 3. This unit has previously been described in detail.9

This first preamplifier system was specifically designed for minimum noise, low-level input and for a rather wide variety of equalization curves and input levels. Due to the rather severe low-end requirement of the original AES equalization curve, equalization was divided between two sections, each of which utilized one 12AY7. Due to the use of a following loudness control there was an

⁹ M. V. Kiebert, "Design of high quality preamplifiers." J.A.E.S., June 1954.

additional requirement which made it essential that the output level of these cascaded units be held approximately equal when switching between the various inputs of various levels. The first section of this unit has a gain of 34 (at 1000 cps), the second section had a gain of 17. The equivalent grid-input noise level (shorted input) was about 3.8 µv (neglecting the "line bumps" of 10 to 12 db); the "fold-up" point was 12 volts; the design output level was 1 volt, the IM (60 and 7,000 cps, 4:1) was 0.1 per cent at 2 v. and about 0.4 per cent at 4.5 v.

A second preamplifier employing a cascode input circuit was designed and tested. The schematic diagram, showing the operating voltages and currents is shown in Fig. 4. The photograph in Fig. 5 shows the actual construction. Figure 6 shows an installation of this unit, with its associated power supply, in a precision turntable and pickup assembly.

The stabilized d.c. amplifier, at the expense of another triode section, pro-

vides a gain of $\frac{\mu}{2}$ and by virtue of its

intrinsic stability permits d.c. coupling with attendant reduction of phase shift problems by avoidance of the usual RC circuits.

The triode cathode follower likewise requires another triode section but provides greatly increased linearity and improved d.c. stability which is desirable in d.c. coupled applications.

This unit is also unique as regards the low-output-impedance, low-distortion output; the use of a d.c.-stabilized, bridge-type interstage amplifier section and a d.c.-coupled, linearized cathode-follower stage for the output. The cascode stage is resistance-capacitance coupled to the stabilized, high-gain d.c.-bridge type amplifier. The use of this type of stage permits direct coupling to a stabilized linear cathode follower which utilizes another triode section as a part of its cathode load. This configuration has a "fold-up" point of 32 volts. The over-all gain is 161 (at 1000 cps); the equivalent grid input noise (Continued on page 107)



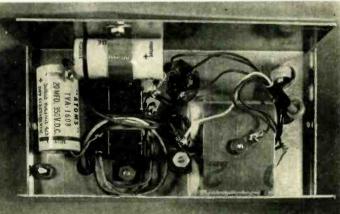


Fig. 9. External and under-chassis views of the power supply of Fig. 8.



LEWIS C. STONE



Fig. 1. Base of audio operations is this suave "powerhouse". The Mondrianic off-center proportioning was determined by placement of hi-fi system units for most comfortable operation.

Fig. 2. The system controls are free of mechanical crowding, control knob bunching or cute disguising. They are mounted in flush furniture-finished panels, easily removable by loosening a few countersunk brass wood screws.



Hi-Fi Powerhouse

A functional cabinet adapted to house a median-cost hi-quality hi-fi system

ESSRS. DIXON AND YATES are not in on this deal, nor is the TVA. There are no kws here, but plenty mys, dbs, and gauss in this deal. We have set it up to balance out our study, in a recent issue, of a hi-fi system housed in a sort of free association of enclosive cabinetry -"arks" they were called. And whereas that all too casually housed system boasted some of the more elegant hi-fi things (see At HOME WITH AUDIO, June, 1955) touching the topmost brackets of cost, the subject of this month's discourse is, on the other hand, a system quite homogeneously contained in its "powerhouse" enclosure, Fig. 1, with parts that radiate and exude sounds, relatively, of hardly lesser virtuosity, though of more modest cost, as we shall see.

Aural Pedigrees

The actual cost at audiophile net prices is, we believe, a figure neither too high nor too low. Specifically, our man's five-hundred-buck kitty has bought him a rather delectable smorgasbord of last-wordish hi-fi components. But what about this "relatively." you say? Here, then, is a rundown of a few of the declared aural pedigrees of the components, which seem to add up to a collective specification of better than passing grade, to say the least.

The 15-watt power-rated 12-inch duplex speaker is the Beam Instruments' Stentorian, will response of 20 to 20,000 coils, and a magnet that weighs 11½ pounds. (\$199.50)
The 40-watt amplifier is the "Coronation 100" by Inter-

electronics; power response ± 0.1 db from 16 to 30,000 cps at 30 watts; over 50 db feedback. Its companion consolette preamplifier-equalizer requires no transformers with all present phono cartridges; offers five input selections, 16 precision playback curves. Bass and treble compensation with over 20 db distortion-free boost and attenuation; hum inaudible with controls on full. (\$179.00 for both.)

The Bogen R640 AM-FM tuner has ten tubes plus rectifier, with off-on and band selector switch plus a.f.c. defeat.

FM sensitivity 5 mv for 20 db quieting. (\$105.50.)

The three-speed record player is the Miracord XA-100 by Audiogersh, equipped with separate spindles for interniixed automatic and for manual operation. Push-button controls, including delay and scratch filter; interchangeable plug-in heads; ball-bearing suspended turntable and tone arm; zero wow and rumble is claimed. (\$67.50.)

The General Electric RPX-052 cartridge is fitted with

diamond LP and sapphire 78 styli. (\$22.50.)

The Klipsch-licensed folded-horn speaker enclosure is the Rebel KR-4 by Cabinart. (\$69,00.)

The tape recorder is Concertone 20/20 by Berlant; tape speeds 15 or 7½ ips., dual track; response 20 to 20,000 cps; signal to noise ratio 55 db; three heads with provision for five. Controls: microphone input, line input and playback output, meter indicators for bias current, record level and output level; VU meter, monitoring output, signal mixing variable from line and microphone. (\$445.00.)

Microphone is Electro-Voice 950 Cardax crystal; hi-fioutput, -57 db; wide-angle pickup at front, reduced sound at rear. Adjustable for flat response or hi-frequency boost. (\$24.99.)


Tape slicer is Robins Industries TS-4DLX, semi auto-

matic. (\$8.75.)

The cost of the basic hi-fi system (before tape recorder, etc.) comes to around \$543.00. A look-ahead additive contributing to the juicier workings of the system, in this case the Concertone tape recorder, adds \$445.00, for a total outside figure of \$988.00. Putting pencil to paper at this juncture for a bit of camparative reckoning and to see where the economics of the deal is trending, the figures show that our basic system costs barely more than one of the better tape recorders alone. Also, that combined with such a recorder the total cost of the system (as above) is, in turn, equal to the cost of one of those tape recorders approaching broadcast standards (meaning that such a machine would have a separate mixing unit with its own power supply). Total catalog price for that kind of equipment is just over nine hundred dollars for one brand, and about two-three bundred dollars more for another. Compared as to equivalent value, our base cost would seem to be pegged in a median or middle ground—a territory certainly attractive economically but one in which a lot of hi-fi errors of com-



Fig. 3. Heard with "presence" but not seen is the 12-inch duplex Stentorian speaker with 11½ pound magnet. Plenty of excursion for clean lows through Cabinart's KR-4 Klipsh-designed folded horn, and tweetered to highs with separate coaxial-mounted voice coil. (The camera "saw" the speaker, but we are not a camera!)

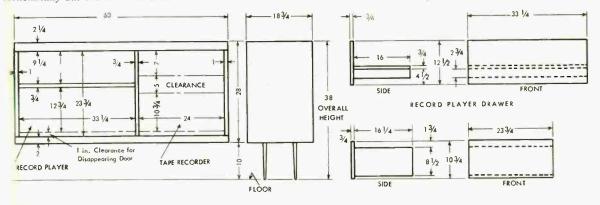

VIEW

SIDE

Fig. 4. Doing it yourself with a purpose: The dimensions give the proportions. Working in wood according to sizes shown yields an esthetic of form for the eye and, more subtly, for the ear as well.

(Design of Powerhouse Cabinet copyright 1955, Lewis C. Stone)

mission and omission are all too frequent. We like to believe (rather than not) that the items we have included in our hi-fi system of the mouth are a most representative sampling and a fair guide to what is available today offering optimum quality at, as we set out to demonstrate, a middle or median cost.


Going Places with Hi-Fi Placements

FRONT

Exactly why your dedicated hi-fier is so willing to take a flier in audio "futures" we do not claim to know for certain. But we can try guessing at a few possible reasons. For one, there's his (and our) fascination with mechanical and electronic devices. Love of gadgets and novelties enters the lists too, alerted as that makes us to the yonder newest thing even as we decide on using the hither one, for who can guess how long. It is a healthy climate of change. Many a new product, like as not, comes on the market with an abruptness that often belies its slowly evolving origins in abstract and basic research. It takes years and years of search and research—for that is essentially the process—to come up with something new and acceptable. And there's no telling how many audio engineers may now have on their boards the embryo of that new concept in amplifiers, or

TAPE RECORDER DRAWER

Fig. 5. Full-size wall cabinet with convenience of chair-side operation. Near compartment shows framing for panels to house tuner, amplifier and preamplifier (top) and below, space for the record player platform. Note side-mounted track for latter, also below it, guide for sliding door. Draw-out with tape recorder in place, in far compartment, with framing and panel set in above it for amplifier. All parts are glued and secured with brass wood screws; joints are mitred, reinforced with corner blocks. Brass legs are caster-mounted for mobility. Note flush-mounted cylinder locks in leading edges af cabinet doors.

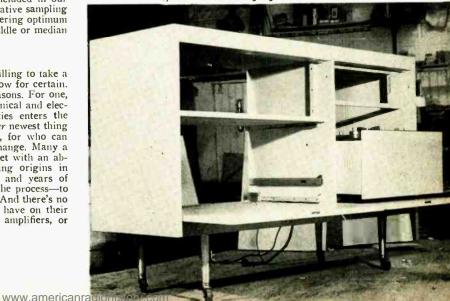

AUDIO • OCTOBER, 1955

speakers, or means of recording sound and of "picking

it up.'

No wonder, then, that in a fast-moving field like audio, your hi-fier is like a fire-engine buff who must ride fast to every ringing of the bells of change and innovation. He is the worshipper in the temples of, as our economist friends term it, superinduced obsolescence. He is the hardy perennial buyer of "change;" he is the one that gives that newer thing its chance by proving it in use as he hi-fis at home with audio. In the devising of our basic cabinet we have given this phenomenon due weight. The instrument mounting panels are removable without in any way affecting the cabinet's format or finish. (Fig. 2.) It can readily accept that different front end, power source, tape or record player, tuner, etc., if and when these have been improved enough to justify the change, and are available at an affordable

Anatomy of Hi-Fi

It is our pleasant, though somewhat reluctant, speculation that the anatomy of hi-fi is an object of inventive evolution, and no amount of "frozen" components can consistently be satisfactory as, regrettably, the frozen ones cannot for long be equal to the progressive offerings of an industry that is fairly boiling with the creation and re-creation of hi-fi media for spirit-lifting home entertainment. It seems that the hi-fi "conscience" can brook no stoppages of the free flow of ideas that ceaselessly shape the better, out of today's perhaps merely adequately good, for the buyer of hi-fi component equipment. Hence, the structure of our cabinet has this virtue of adaptability.

Our guess is that the incidence of certain makes of equipment in a good hi-fi system seems to run a gamut of comparative quality not much greater than that from A to B or maybe C. There are numerous worthy makes, many individual preferences. But the young "turks" as well as the elders of hi-fi are generally as one in subscribing to the stylish offerings of the currently many-time winners among the thoroughbreds of home audio instrumentation. For some of us the changeovers in brand loyalties-if any-come about slowly if at all, inspired as they usually are by either a friend's later installation, or exposure to other brands seen at successive Audio Fairs, in audio merchants' salons, or described in a publication, or by our own sharpened critique, and the like. At any rate your hi-fi stalwart moves along from his original basic four- or five-unit system to acquisition of "better" and more units for, up to a point what he considers his ultimate destination in star-studded earfuls of joyous perception. For the likes of him (and aren't we all?) a good hi-fi system, a well-rounded system, is like a little colossus poised astride radio broadcast reception on the one leg, and home music generation on the other. This "creature" offers in the compress of record or

Fig. 7. Operation of tape recorder from seated or standing position has been designed into this placement of its components. Panel for amplifier is removable by taking out screws blind-mounted from the rear. Transport unit board comes out when four wood screws (two shown) are removed. Note round venting holes in back panel, just behind the 101/2-inch reels.

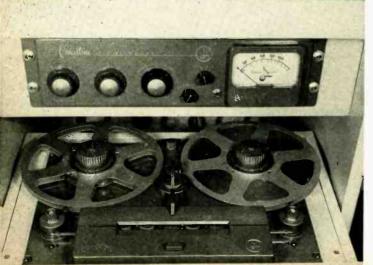




Fig. 6. No Tin Pan Alley is this vista of audio instrumentation, but rather a Rue de la Hi-Fi. Space alongside automatic record player is provided for addition of heavy-duty turntable in future. Control panel is recessed for knobs to clear doors when closed. Note spring catch in near edge of door.

tape or broadcast band, the substance of whole orchestras of instuments, ensembles of voices. And these recordings, only inches-big are played on or through mechanisms also measured in inches; in turn they are mounted and interconnected within that inch-dimensioned Music Hall in miniature—the well-devised hi-fi cabinet, with speaker separate, but far from aloof. (Fig. 3.)

Re-creation, and Recreation Too

But, we say, measured in inches generously. As given in the sketches, Fig. 4, the dimensions of the "powerhouse" are 60 inches long, 1834 inches deep, and 28 inches high. Plus 10-inch supports, the total height is 38 inches which, for the average person, places the top of the cabinet just about below the bent elbow. The top is a fixed flat surface, not a lift-aid. On it we have seen the comfortable handling of records or tape reels or tape splicer; the selected ones finally being placed on the projecting ends of the "platform" sliding doors, which serve as shelf or side table, being always level and firm because of the solid way they have been mounted to slide freely in and out. From full "out" position they swing upward on full-length brass piano hinges, closing to with small spring catches set flush into their side edges, to cover and conceal the hi-fi controls. When these doors are locked (with cylinder locks) they protect the system from undesirable handling or tampering, whether by grown-ups or children. Like a precious car is said to keep best if it is one-man driven consistently, so it appears to be with what is in its way and on its scale, the similarly precious hi-fi equipment.

The housing is a wall cabinet in build and stature, but in addition is a comfortably workable chairside hi-fi system. In fact the placement and disposal of the equipment and the components were planned for this kind of flexibility in operation, and the comfort levels were determined with the aid of a person seated on a plain kitchen chair (seat 17 inches above floor) alongside of the first framing-out of the cabinet and before all the innards were placed. (Fig. 5.) The same factor influenced the final height of the legs of the cabinet. They could be not longer than 10 inches over-all. including sizable heavy-duty ball-bearing casters for mobility. In a small city apartment heaven only knows what the "layout" might turn out to be as a growing family twists and turns in its confines, hedging to gain an inch of space here, another there-and where, it is only fair to ask, would

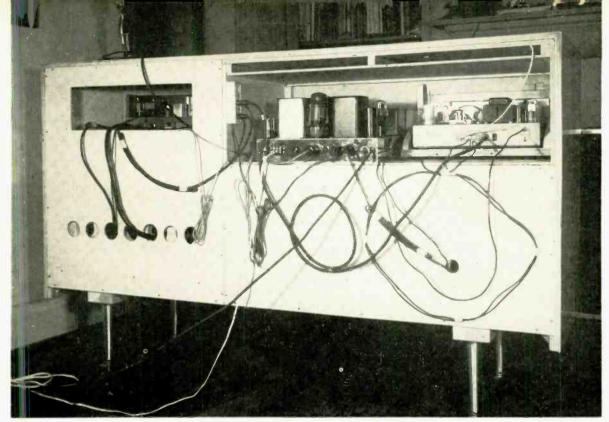


Fig. 8. Rear of "powerhouse" is finished in Korina veneer same as the front and sides. Only two leads trail to floor—the power cable to house-outlet and twin leads to speaker. Large coil at right is AM antenna; FM antenna is carried up from tuner and stapled to framing above air-vent compartment. Round holes at left bottom are for ventilation; port at top gives desirable flue effect, also access to tape recorder amplifier. Note wood screws catercornered showing placement of corner blocks beneath for rigid framing.

that get them if all the furniture were not free-swinging, a la a Calder mobile (confined to quarters, but in motion) at least? The two pairs of legs were fashioned from stock 12-inch ones, brass-plated over cast aluminum with integrally-cast mounting plates. They were cut down at the narrow end of their taper to a length of 71/2 inches, wood blocks then being wedged inside through the top down to the now larger opening at the bottom, wide enough to accommodate and fix solidly the ferrules of the heavy casters, which in themselves measured the necessary 2½ inches high to bring the total height of the supports back to the required 10 inches. All of this has contributed to the final dimensions and determined the final operating levels or positions for the various components of the system. The controls for the tuner, main amplifier and the tape recorder amplifier are all aligned in tandem just about below shoulder height of a seated person. Both the tape recorder transport and the automatic record player are, on the other hand, just below the level of the bent elbow of the seated figure—which is something this department has been advocating as a desirable tiring-proof working level for most operating steps around audio at home.

The Versatile Powerhouse

Preplanned specifically to house hi-fi equipment, it is also adaptable to change. Like one of these ranch-type homes so popular today, it has its equivalent of an expansion attic, in the sense that voids have been built into the design for the accommodation of future arrivals and additions to this hi-fi family. (The tape recorder is one such "future," but has been included here to demonstrate the validity of the basic cabinet design.) Note in Fig. 6 the un-broken area provided alongside of the automatic record player—some 19 by 20 inches of space—which is plenty and to spare for the future addition of one of those stable. heavy-duty turntables of this man's choice, plus a choice of any one of a number of fine quality pickup arms and their proper cartridges. Not that the roles of automatic or manual turntables are not interchangeable in this particular hi-fi menage. "Serious" listening can be enjoyed with either (Continued on page 100)


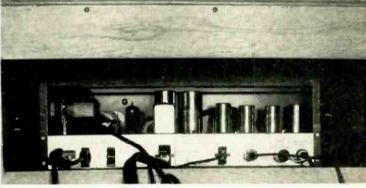


Fig. 9. Rear skirt of tape recorder amplifier shows output, live microphone input and bridging input, enabling variable signal mixing from line and microphone.

Fig. 10. Heat from tuner and power amplifier is carried off in air space near top. Note that all parts are secured with screws. Three-outlet receptacle at left is "sub-station" powered from outlet in main amplifier, accommodates leads from record player and tape recorder, avoiding jungle of wires around house-outlet. Tuner is cradled an bracketed shelf for stability and better ventilation. Note one of the two KT66 tubes in power amplifier.

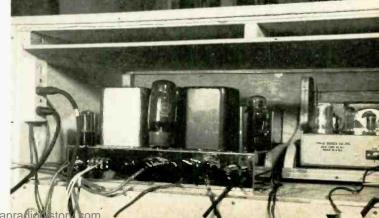

www.americani

The Record Dealer Views the Stylus Problem

SAM GOODY*

The grass isn't always greener on the other side of the fence—the dealer has some arguments in his favor. The author—who undoubtedly sells more phonograph records per year than any other dealer in the country—tells his side of the story.

HE ADVENT of the long-playing record has proven a boon both to the record buyer and to the phonograph record dealer because of certain unique advantages this speed has to offer. We know that the long-playing record has musical continuity, consumes considerably less space, has the advantage of safe portability and, most important for the purchaser today, gives excellent sound reproduction. This last factor has been the most widely publicized and the most eagerly accepted, until record sales on LP's have amassed figures which have reached an all-time high. But with the fantastic number of records sold and the publicity about LP records, one negative factor stands out like a sore thumb, yet it has been consistently and continually overlooked by the entire record and equipment industry. This is the problem of the alleged defective record. This problem has grown to the proportions of a plague which has descended upon the record retailer and in some measure upon the manufacturer and which by the inevitability of the customers' ignorance has destroyed a large share of the good will created by this remarkable product, the long playing record.

* 235 W. 49th St., New York 19, N. Y.

I, myself, realize and will concede that there are defects on some records and, concomitantly, that all records are not perfect. However, a record which is defective can be proven to be such beyond a shadow of a doubt. In the early days of LP production (circa 1949/50) there were a number of pressings made with deficient stampers. However, with the inspection systems now employed by the record companies, it is virtually impossible for a run of defective records to escape the sharp eyes and ears of the inspectors. Every fiftieth or so record coming off the press is subjected to a complete examination in a search for defect. So rare are these actual deficiencies that many of the record manufacturers now refuse to accept merchandise returned as defective hy the record dealers.

In using the word defect I am not dealing with the obvious, easily detected blemish generally caused by mishandling or created by abrasive substances found in the record sleeve, but mainly with deficiencies which are caused by faulty or badly worn phonograph needles. One of the positive aspects of my company's business policy and one which attracted an unlimited number of

record buyers to the new speed was our policy of permitting the customers to exchange any LP record without question. It was not until I had totaled the sales for one day, and examined our defective record returns (which were always sent back to the factory under the manufacturer's guarantee) that I noticed that the total of returns for that day nearly equalled the entire day's sales. You do not have to be a particularly shrewd businessman nor inordinately suspicious to realize that this large quantity of returns could not all be defective. Either our customers or the records were at fault and I decided to attempt to unravel this knotty problem.

It has always been prime policy in our shop never to permit the auditioning of records on the premises. To further this aim we made sure that no phonograph was ever available which might be used for this purpose. My feeling is that only one playing of a record is sufficient to convert a brand new record into a used commodity. Permitting the records to be played on the premises would invalidate my policy of selling only factory new merchandise. In order to check more closely on records being returned with purported defects, we installed a high-fidelity phonograph. Customers returning these records were politely asked to point out the nature of the fault and the approximate area on the record where such claimed blemish existed.

Needless to remark, many of my customers were taken by surprise, and some even struck an indignant pose when this new policy was instituted. However, the majority agreed that we were justified in checking the record to discover the defect in order that they might procure a satisfactory replacement. Both customer and ourselves were continually amazed, after checking, to find that there was nothing wrong with many of the records; that they tracked perfectly, neither sticking nor jumping grooves. The customer had, perforce, no alternative but to reclaim his original record. But still they kept coming in with other records that did not play properly and no matter how often replaced were still not satisfactory to the customer on his machine. Logic indicated that since the only portion of the phonograph that came in contact with the record was the needle, then this tiny object must be the culprit. And so we set to work to try to evolve

(Continued on page 95)



"Ten watts at least."

Equipment Report

C. G. McPROUD



MIRACORD "MAGIC WAND" RECORD CHANGER

It is prinbable that the designer of a record changer considers that amplifiers are "Rube Goldbergs" compared to his simple products, but most of us who profess to understand amplifiers are amazed by almost any record changer. The new Miracord XA-100 has a number of features which are new to the changer field, but which result in an interesting and efficient unit,

Foremost of the features is the "Magic Wan!"—a device which handles 78's and LP's in the same manner as 45's are handled—fri in the center hole entirely. And it work—, too—consistently and reliably. This devi.e., which readily lifts out from the hole in the center of the turntable, takes a stack of ten to twelve ordinary records, holds them cared lly balanced on its small spindle, and drop them as required—one at a time. And where there are no more to drop, the pickup arm returns to its rest and shuts the mntor iff. The Wand is actuated from below, and is held in place only during a change cycle; any rher time it can be removed to facilitate taking a played stack off the turntable. It takes 10 mr 12-inch records, intermixed as desir d, and plays them all properly—the one requirement being that all are of the same speed and stylus type.

speed and stylus type.

If, however, you should not want it to oper, te as a changer, you simply remove the Mage Wand and replace it with a short spin, le, conveniently held in a clip which you nount on the motor board. Then you mount obecomes a single-play turntable to all intents and purposes, for you can move the jickup arm at will, yet the motor still shuts of and the arm returns when the record has bished playing.

When you want to repeat a 10-inch record a nut ber of times, you turn the short spindle over and replace it in the bole; then the device plays the record over and over as long as you leave it turned on. And while it does not tay so in the instructions, a toothpick judio ously placed in the slot alongside the record scanning lever will cause the changer to receat 12-inch records indefinitely.

For 45's, a large center spindle works in the inventional manner, the arm dropping at the 7-in, diameter so long as the speed control knob is set at 45 r.p.m.

Push Button Controls

T e operation is controlled by fnur push
buttons—START, FILTER, PAUSE, and
REPIAT, for repetitive operation. The
STA®T button commences the operations
once you have placed the records on the
spin. e and set the speed control knob to
the correct r.p.m. The REPEAT button in
augulates a change cycle without causing the
record to change. The FILTER button places
a load resistor across the pickup to lower
high-frequency response. If the unit is being
used with a modern amplifier with adequate
controls except for the absence of a sharp
cutoff the resistor could be replaced with a
capat tor and resistor in shunt to provide a
cutoff at any desired frequency. Another pos-

sible use would be to cut in a different lnad resistor if two different types of pickups were used interchangeably; or by adding some series resistance in the pickup shell from a new type ceramic pickup and a different shunt resistor for level-adjusting applications. In short, another single-pole single-throw switch is available for what

ever use the owner might wish tn put it.

But the PAUSE button—that's another story. As you depress this one, the number in a small hnle back of the buttons changes. In the "0" position, the changer operates with its normal cycling time—5 seconds for 78's, 9 for 45's, and 12 fnr LP's, If you depress the PAUSE button once, the number "1" appears in the opening and the cycling time is multiplied by seven, approximately. Depress it again and the number "2" appears in the bole and the cycling time is multiplied by two times seven, still approximately. In the "4" position, the pause between successive playings is 328 seconds for LP's, 140 for 78's. Thus you can adjust the interval between recently to as much as 5½ minutes with LP's, which many people find a great convenience when using the phonograph for background music.

The turntable runs on a ball suspension, and rumble was measured at less than 3 db higher than a comparison single-play unit. No wow was detectable on 78-r.p.m. piann records played at 33½—a test which appears to be quite indicative of any wow whatever in a turntable,

The pickup is carried in a plug-in head, and stylus force can be adjusted by means of a knurled nut under the arm and just behind the pickup head. Pickup output is shorted during the change cycle, and a resistance-capacitance filter eliminates pops from mothr starts and stops. With stylus fince set at 6 grams an a single record on the turntable, it was again measured with ten 10-in. records on the turntable, and was fnund the within one gram of the original setting. Electrical connections are so arranged that a shielded pair can be used to connect to the pickup, if desired, to reduce hum pickup in the leads over that single shielded wire.

The changer is attractively finished in maroon enamel with contrasting white push buttons, speed control knob, and turntable mat, which is of molded rubber with projections on the under side to engage holes in the platter, and with concentric grooves in top to give a firm grip to the records. Also molded into the mat are three gear-like projections which make positive engagement with the bottom of the 45 spindle to prevent slippage.

The four-pole mntor is Incated well away from the pickup arc to avoid induced hum, and is effectively shock mnunted to reduce rumble to a minimum. The motor is started and stopped by a switch in the pickup arm rest, and a spring clip lnids the arm against the rest to protect the pickup from accidentally being pushed off and damaged.

Why Choose Between a **Record Changer** and a **Record Player** When You Can Have the **Convenience** and Performance of BOTH in **ONE Instrument?**

If you are confused by conflicting claims, read about the . . .

MIRACORD XA-100

. . . most revolutionary advance in record playing since the automatic changer was developed!

A Precision Instrument for BOTH Manual

XA-IOO

with PUSHBUTTON CONTROL and the "MAGIC WAND" SPINDLE

2 Precision Instruments in ONE:

- (1) PUSHBUTTON AUTOMATIC RECORD CHANGER
- (2) PUSHBUTTON MANUAL RECORD PLAYER

Here is a truly magnificent accomplishment in the high fidelity field - the two-in-one Miracord XA-100. Tested and enthusiastically approved in laboratory and home, the Miracord XA-100 is unequalled in both quality and performance.

Every element desired by the critical listener was considered: simplicity of operation, made possible by Pushbutton Control; unhampered record reproduction; the heavy duty 4-pole motor in hum-free mounting means no wow, rumble or hum; gentle treatment of your records with the exclusive "Magic Wand" Spindle; and finally, beauty of design in an extraordinarily compact unit.

That is why it is not surprising that the Miracord XA-100 is the world's most preferred record changer.

EASY OPERATION -- 4 PUSHBUTTON CONTROL

The touch of a button starts the smooth, silent action. The "Magic Wand" Spindle releases records gently — not a pusher arm or stabilizing plate in sight! Now you can enjoy hours of continuous music — with the pause YOU want between records. Or insert the single-play Spindle your MIRACORD becomes a manual player! Muting switch eliminates "plop". At the end of record play, the arm returns to rest and sets down.

SPECIFICATIONS: For AC current, 110 or 220 volts, 60 cycles. 50 cycles can be furnished if specified. Chassis, 121/2" x 101/4". Height above mounting plate 21/2", below mounting plate 214". Clearance above mounting plate 414", below mounting plate 234". Net weight approximately 11 lbs. Gross weight approximately 14 lbs.

SHIPPED COMPLETELY ASSEMBLED WITH ALL PLUGS AND LEADS ATTACHED READY FOR OPERATION SOLD AND SERVICED BY HIGH FIDELITY DEALERS FROM COAST TO COAST

Audiophile Net \$67.50

with GE RPX-050 Cartridge Audiophile Net \$74.50

COMPARE THESE UNEQUALLED OUTSTANDING FEATURES:



- NO STABILIZING PLATES INTERMIXES 10" and 12" records regardless of how stacked.

Undue load on the record stack and pusher arm friction are eliminated. Prevents enlarged center hole and the distortion that results. PROLONGS THE LIFE OF YOUR PRECIOUS RECORDS.

THE SINGLE PLAY SPINDLE

comes with puck for 45 rpm play. A spindle for automatic 45 rpm play is available as an accessory. By inverting the Single Play Spindle you have continuous record repeat on a 10" record!




INTERMIXES 10"

and 12" RECORDS

"MAGIC WAND" allows 10" and 12" records to be intermixed. Changes 10 or 12 inch records in a single record stack. Extremely simple to load. Records can be replenished at any time even during playing.

CAPACITY . . . Holds eight 12" records; ten 10" records (or a corresponding mixture of both) or ten 7" records.




EASY PUSHBUTTON CONTROL

4 Pushbuttons Control All Operations:

- REPEAT: Allows record to finish, then repeats without dropping new record, or any portion of record can be repeated.
- · PAUSE: Adjusts wait period between records.
- · FILTER: Screens out surface noises caused by old records - only the music cames through.
- START: Starts operating. Push START button to reject . . . permits record change of any time.

and Automatic Reproduction of ALL Records

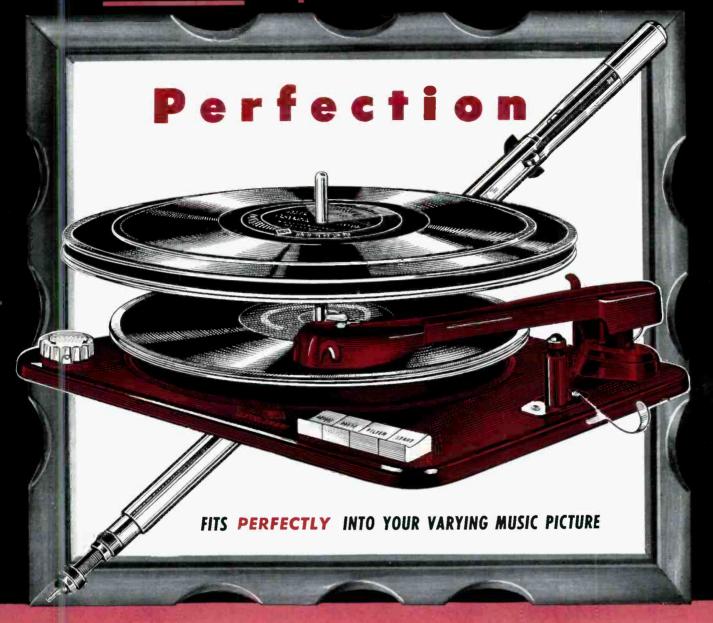



"PAUSAMATIC" INTERVAL CONTROL

Automatically regulates wait periad between records. Adjustable as fallows: 78 rpm adjusts from 5 seconds to 2½ minutes; 45 rpm from 9 seconds to 4 minutes; 33½ rpm from 12 seconds to 5½ minutes. The interval selector is located directly above the PAUSE

Heavy Duty 4 POLE MOTOR

With constant turntable speed insures correct pitch.

- NO WOW
- NO RUMBLE

Mounted in vibration-free ball bearings, totally screened to prevent outside interference.



ONE KNOB CONTROLS ALL THREE SPEEDS

A simple turn of the setting knob sets the speed desired, No other adjustments or settings necessary.

NOISE REDUCING TONE ARM

The Tone Arm is constructed of special noise-reducing plastic and suspended in ball bearings. Eliminates stylus displacement and guarantees equal stylus pressure.



INTERCHANGEABLE PLUG-IN HEAD



Allows use of all standard and turnover cartridges. Simple thumbscrew easily adjusted to compensate for any change in cartridge weight.

BEAUTY! COMPACTNESS! EFFICIENCY! VERSATILITY!

Miracord's base measures only 12½" x 10½". Comes in rich, gleaming Burgundy with white trim, white rubber-matted turntable

TRANSCRIPTION QUALITY!



Incorporates the latest achievements in phonographic engineering and offers high fidelity reproduction that will satisfy the most critical listener. The three-speed drive is arranged for 3315, 45 or 78 rpm.

A specially designed four pole motor with a high constant speed factor is mounted in vibration free ball bearings totally screened to prevent outside interference

The tone arm is constructed of damped plastic and is suspended in ball bearings thus eliminating displacement of stylus and guaranteeing equal stylus pressure. Beautifully finished in rich Burgundy with white trim. White rubber matted turntable. Chassis 1215" x 1014"

> Shipped Completely Assembled with Plugs and Leads Attached Ready for Operation.

> > Audiophile net \$37.50

with GE RPX-050 Cartridge, Audiophile Net \$44.50 SOLD AND SERVICED BY HIGH FIDELITY DEALERS FROM COAST TO COAST

OUTSTANDING FEATURES

- * High Fidelity sound re-production in the entire frequency range
- * Plug-in head to accommodate users choice of cartridge
- * Minimum needle pres-sure with adjustment screw to compensate for cartridge weight
- * Tone arm of specially developed noise reducing plastic
- Three-speed drive for 331/3, 45 or 78 rpm
- ★ Specially constructed 4 pole motor with hum free mounting, abso-lutely free of outside interference
- * Specially balanced turntable — white rub-ber matted
- * Silent Automatic stop-

SPECIFICATIONS

For AC current, 110 or 220 volts, 60 cycles. 50 cycles can also be furnished if specified. Chassis, 12½" x 10¼". Clearance above mounting plate 413", below mounting plate 214". Height above mounting plate 21/2", below mounting plate 21/4". Net weight approximately 7 lbs. Gross weight approximately 10 lbs.

ACCESSORIES FOR MIRACORD XA-100 and MIRAPHON XM-110



No. "38" **AUTOMATIC SPINDLE**

Automatic spindle for 45 rpm use. Holds ten records. Constructed of durable plastic, finished in maroon. Supplied complete with clips for attaching spindle to base when not in use. For MIRACORD XA-100 audiophile net \$4.50



PLUG-IN HEAD

Constructed of specially domped plastic. The plug-in head will accept any standard cartridge. Supplied complete with turnbutton and standoffs, wires attached. Fits both MIRAPHON XM-110 and MIRACORD XA-100. audiophile net \$2.50

AUDAX ADAPTER audiophile net \$2.50



MOUNTING BOARD

Kiln dried and sanded ready far staining. All holes drilled. Specify XA-100 ar XM-110. audiophile net \$2.50

BRASS TURNTABLE

For MIRACORD XA-100 ONLY audiophile net \$10.00



Beautifully fashianed and covered in burgundy leatherette. Stainless continental hardware . . . all clips for accessories attached to case. Hinged bottom to permit rapid installation, and special fall-away hinge for cover permits use as a base if desired. Specify XA-100 or XM-110.

audiophile net \$24.50



FINISHED BASE

Complements the burgundy and surf-white decor of the unit. Specify XA-100 or XM-110. oudiophile net \$5.95

AUDIOGERSH CORPORATION

23 PARK PLACE, NEW YORK 7, N. Y.

EXCLUSIVE DISTRIBUTORS IN THE U.S. FOR ELAC RECORD PLAYERS



The "Patrician" Gets a Home Workout

How to build the folded horn; what to do with the components; how to wire them internally and into your hi-fi audio system.

CULLEN H. MACPHERSON* and ROY C. CARLSON*

Socially Speaking, the patrician and the manual worker have, traditionally, little in common. But a hone constructor worker of sorts can build a 'Patrician,' providing he follows certain instructions laid forth here. For we are peaking not of "talkers" with windpipes, ut of speakers with voice-coils—hi-fiones. Economically speaking, the assumption is that one unit of work by a do-it-yourselfer audioist is pretty sure to get him a half-dozen tangible and intangible units of value. In other words, do something yourself, save something of your substance, and besides (another "gain") lose that creeping flabbiness in your nursele-flexor areas.

your nuscle-flexor areas.

Hi-fi-ly speaking, "Patrician," Fig. 1, identifiies a certain folded-horn speaker system. It contains a woofer, mid-bass driver, treble unit, and tweeters, with the proper crossovers at the proper frequen-cies. The interior horn assembly we are about to dissect and analyze-for you, in turn, to synthesize-is housed in a finished furniture cabinet 60 inches high over-all, 41 inches wide and 30 inches deep. It is not a simple one to build, but build you shall (as the saying goes) for the simple reason that, like many of us, your itch to get is not blessed with enough "scratch." Hie yourself then to the woodshop and get dimension lumber and sheets in sizes and quantities sufficient to make the necessary parts, subassemblies and assemblies, as will be shown further on.

The Horn Assembly

The construction of this speaker enclosure has been boiled down to seven steps. We suggest you follow them, as they are basic to the successful completion of what, for want of these steps, could be a most confusing and perhaps frustrating undertaking. The interior horn assembly consists of the complete wooden acoustic structure necessary for the satisfactory operation of a 4-way corner type loudspeaker system. The sequence of procedure outlined here for the wood assembly duplicates the working parts of the Electro-Voice Patrician IV.

The horn assembly can be had in either of three ways: (1) The complete Patrician cabinet, which is supplied with furniture exterior, all the internal horn construction, and the speaker system mounted and connected ready to operate on delivery by hooking up to the proper terminals on your proper power amplifier. (2) The internal horn assembly

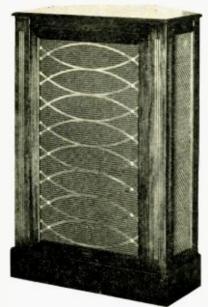


Fig. 1. The completed Patrician loudspeaker a four-way system of excellent performance which may be built by following the plans given in this article.

only, in kit form, which you proceed to put together as shown in the step-by-step isometrics, numbers 1 to 7 inclusive. This horn assembly is without the outer furniture casing. (3) The complete working drawings only, for this internal horn assembly construction, with the size, quantity and kind of lumber of wood needed for each of the parts. The dimensioned lumber specified ranges from ½-inch to ¾-inch fir plywood B-D grade or better, to a solid dimensioned lumber like poplar of ½-inches to ½-inches thickness. Such is the province of this article.

Parts and Patterns

The speaker units that come with the complete Patrician IV cabinet, and for which the kit or properly home-built horn are equally suitable, provide you with a system identified as the Electro-Voice Model 103-C Driver Components Package, consisting of some ten items:

1—18WK very-low-frequency (Lo-Lo) driver

2—A8419 low-frequency phenolic horn sections (complete set)

2—828 high-frequency drivers (complete set).

1—T25A treble driver

1—6HD 600-cps diffraction horn

1—T35 very-high-frequency driver

1—X2635 four-way crossover network
 1—8675 cable harness, including three
 AT37 level controls

The construction of the parts that make up the front section of the model 115 K horn assembly, shown in step 1 is detailed in drawings 12, 13, 14, 17, 18, and 22.

The construction of parts leading to step 2 is shown in details 5, 6, 7, 19, 20, and 21.

Step 3 construction is shown in details

3, 8, 10, and 11.

Step 4 is an interior assembly job, indicating where details 10 and 11 fit (as

in step 3) and introducing detail 4.

Step 5 is the erected assembly of the 115 K low-frequency driver horn, complete at this point but for the addition of the diffraction horn assembly which fits over the top of the K horn. All of the foregoing five steps are shown in Fig. 2.

Step 6 is the mid-bass diffraction horn assembly, with its parts shown in details 1, 2, 3, 9, 15, and 25, *Fig.* 3.

Step 7 shown in *Fig.* 4, is the com-

Step 7 shown in Fig. 4, is the completed erection of the Patrician horn assembly with mid-bass diffraction horn housing added, and details 16, 23, 24, and 26. (Note detail 26, an acceptable alternate serving the purpose as well as the curvilinear detail 25 indicated in step 6, and easier for most of us to make, unless blessed with special tools for routing the top of part 3, shown in step 6).

Working Out the Steps

What you do to get step 1 done, (Fig. 2): Place part 22 face down on a workbench or saw-horses. The face should be the better side of the fir plywood panel, which typically is a "wild" grained wood; you would choose the more restrained or cleaner appearing grain for the front. Four strips 12 and two 17's which abut the perimeter of the 21-inch square opening in the center, should be secured as shown, with glue and nails. Use enough glue ("Weldwood" or "Woodlock," for example) so that it oozes out from the joints as the pieces are butted together for nailing. All contacting edges, in fact, should be sanded before gluing and nailing, which will guarantee a tight fit and prevent air leaks throughout the completed horn, especially in the two cavities leading to the

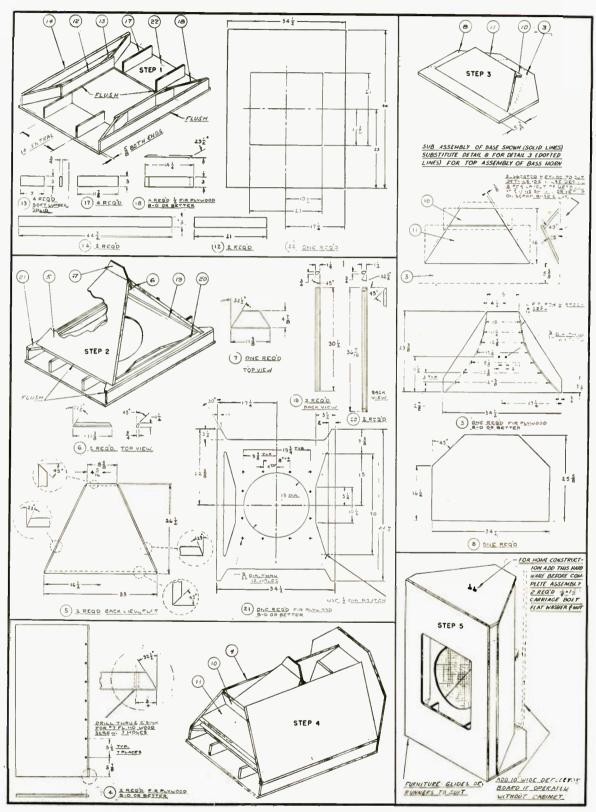


Fig. 2. Basic wood parts for the K-horn enclosure, illustrated in the first five steps of construction.

back of the driver cone. Now tack or clamp part two 14's in position, flush on the outside of face board 22, but shorter than it by 5% in. at both ends. You've now laid in all the parallel pieces. Then place four strips 18 across strips 12 and 14, scribing guide lines for the mitre cut, as that is the way they will have to be set in for an airtight fit. Cut the mitres in the four 18's, then temporarily tack and clamp in place. Do the same with four parts 13, first laying them across 12 and 18 to determine the mitre. Cut it then; holding part 13 in place by hand scribe a line on part 22 around the insides of 12, 13, 14 and 18. Loosen temporary fastenings and glue and nail 13, 14 and 18, guided by the scribe lines. For added rigidity use 34-inch square cleats at the points where 12, 14 and 18 are butted to 27

tep 2

The strips you have just mounted and secured are the base for parts that will be laid flat across them, and should all be evenly level. This you can (and should) check by laying a straight-edge across the assembly, using the 14's as a guide for correcting any high or low spots among the sixteen (count them) pieces. Satisfied that they are uniformly level, you can now lay down part 21, which is the board with the round speaker opening in it. Glue and nail it in place, using an excess of glue to assure an airtight fit for all vertical members.

Erection of the cone is facilitated by temporarily tacking two pieces of scrap wood 1 in. thick across the 17's and tight against 21. Tap your hammer lightly to tack parts 5 temporarily at their inter-section with 21. Use another piece of scrap plywood to stick up from board 21 all the way to the place to be occupied by part 7, at the apex of the cone-to-be. Holding a 19 with one hand, scribe location guide lines on 21; then scribe another guide line for parts 20. Be sure to mark the pieces correspondingly so that you can secure them where they belong without mismatching. Remove parts 5 (you have tacked them temporarily) to enable you to glue copiously and then nail the two 19's and the two 20's to panel 21. Now you are free to secure parts 5 (the two sides of the cone), by gluing and nailing to the 21's; and at the apex where parts 6 (cleat details inside the apex) and the lower end of part 7 meet. With 5 as a guide, check for absolute level with a straightedge laid across 6 and 7.

Step 3

This shows the assembly of the ramps—there are two, one at the top, the other at the base of the horn assembly.

The lower one is made up of parts 8, 10, and 11, glued and nailed together; the top unit uses parts 3, 10, and 11. To do this properly, tack a cleat or piece of wood scrap 53% in. from the edge of part 8 (which is the "base") and fit part 11 against it. Then, 16 in. away towards the narrow end of "base" 8, place another cleat or block to hold part 10. Now glue and nail 10 and 11 to 8. Do the same with 3, 10 and 11, gluing throughout

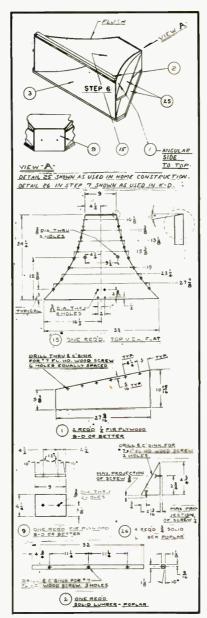


Fig. 3. Wood parts and assembly for the diffraction horn assembly which tops the low-frequency section.

thus providing the ramp for the base sub-assembly of the bass horn.

Step 4

Now mount the encompassing side wings, the two parts 4. Glue and nail the 4's to panel 21. If needed, you may use wood screws to secure 4 tightly to 21. Add dummy spacers across the back of the assembly to hold 4 parallel. Now try the fit of the base sub-assembly (built as in step 3). Do not force it to fit. If sides 4 spring out, then trim parts 10 and 11. Glue and nail 8 and 4 only.

Step 5

Follow the same procedure as to fitting the top sub-assembly. Do not force the fit, but follow through as in step 4. Glue and nail 3 and 4, then complete gluing and nailing 4, 10 and 11 on both assemblies.

Step 6

To ready the mid-bass diffraction horn sub-assembly for its place atop the 115 K horn housing, assemble parts 1, 2, 9, and 15 as in Fig. 3. Scribe a line on the angular side of 1, about 5%-inch in from the narrow end. Glue and nail 2 and 15, then glue and nail 1 and 15, with the scribed line flush with the narrow end of 15. And when you have glued and nailed 9, this assembly is complete.

Step 7

Glue and nail cleats 16 to 3, Fig. 4, which is the top of the folded horn; keeping 1 at right angles to 3, glue and nail gussets to suit. And make sure that an airtight seal exists where the diffraction horn sub-assembly sits atop the K horn. Do this by adding adhesive-backed airtight sponge rubber weatherstripping, ½8 by ¾ in. along the inner outline of 24. Do the same around the exterior of the front loading panel opening in 23.

Airtightness is an absolute requirement and we suggest that this can be further assured by gluing with the types of glue mentioned above, 2½-in. strips of nuslin or broadcloth over all joints in the interior of the cavity. Or you may use wood filler or plastic wood instead. Careful application of either should give the desired degree of airtightness.

Note that it is necessary to install a 14-inch wide deflector board at the rear, and for the full height, of the K horn (step 5 dotted lines) if you intend to operate it without an enclosing cabinet.

The Electronic Assembly

The wood construction described above is based on the Klipsch principle of folded corner-horn loading. It has been designed to house the model 18 WK low-frequency driver in a K type reproducer, but scaled up 16-2/3 per cent. When the Patrician IV or its properly self-made facsimile is placed in a corner, the folded throat of the bass horn becomes part of the entire room, allowing the large wavelengths of the second and the upper parts of the first audible octave to be formed properly. The low-bass driving section reproduces the first three octaves, to the first crossover point at 200 cps.

Taking over for only the next oneand-a-half octave range to 600 cps is a separate horn, used as an indirect radiator, with two 828HF driver units, for the mid-bass section. The horn load is fabricated of wood and phenolic tubes, one of which is shown in Fig. 5, and reproduction down to 200 cps is handled much more satisfactorily than a horn assembly made of metal.

The treble range, from 600 to 3,500 cps, is reproduced through the Electro-Voice Model T25A driver exhausting into a 600-cps 6HD diffraction horn. Fig 6. Other frequencies not a part of this range are excluded, but are reproduced by the T35 Super-Sonax very-high-frequency driver, using an integral diffraction horn.

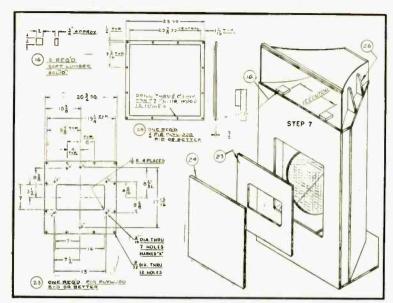


Fig. 4. Steps for assemblying the diffraction horn to the low-frequency section.

With this unit the remaining octaves in the audible register above 3,500 cps are accomplished with practically unmeasurable distortion. The proper allocation of this spectral energy is controlled by the X2635 crossover network. It divides the amplifier power into four separate portions, eliminating upper harmonic and intermodulation distortion from one driver in the region covered by the next.

See (as in Fig. 7 A, B, C, D) how these components are interconnected for optimum reproduction efficiency. The electronic schematic has also been translated into placement-perspectives of these parts. These, in addition to the step-bystep drawings for building the wooden acoustic structure, have been prepared to clarify the entire procedure for the hi-fi enthusiast who might prefer to add his manual efforts to the integration of a 4-way speaker system for a fuller enjoyment of his signal-source hi-fi equipment.

Step 1

Begin the installation of the driver components in the acoustic structure by laying the horn on its back and removing the front cover and the speaker mounting boards, at the same time marking the tops for proper re-assembly after the 18 WK low-frequency driver has been placed on the center of the mounting board.

Step 2

Drill holes in it for mounting by placing the speaker with two opposing rim holes on a vertical center line, with the speaker terminals showing on either side of the top hole. Your guide to drilling the necessary holes for the bolts is a sure one if you now make markings on the mounting board through the bolt holes on the rim of the speaker shell. Then drill six ¼ in holes in the mounting board in these locations; also drill one 3/16 in hole near the terminals just outside the speaker frame.

Step 3

Use 3/16 inch carriage bolts, 13/4 inches long, with both flat (under the bolt head) and lock washers (at the nut end) to bolt the woofer into place. Tighten the carriage bolts just snug enough to hold the loudspeaker firmly in position. If you draw the holts too tightly at this stage you may warp the speaker frame and cause the voice coil to rub. Now take up the wiring harness kit which comes packed with the speaker, and run the long single red and black pair from the speaker through the 3/16 inch hole. A knot tied on the speaker side will prevent the cable being pulled out. Attach the wires to the terminals of the 18 WK as follows: red wire goes to black terminal and the black wire to the red terminal-and you will enjoy proper phasing when operating the system later. 'A" in Fig. 7).
Replace the baffle board with its

Replace the baffle board with its speaker, taking care to seal the board tightly against the sponge rubber gasket material. Draw the speaker leads through the top opening of the horn and out to

the back. Close the throat of the large horn by screwing the front cover back into place, and be sure that it makes a tight seal with the gasket.

Step 4

The foregoing three steps in the process of fitting the speaker system components together were handled with the K horn on its back. Now return the assembly to an upright position. And here we invoke, again, (see AT HOME WITH AUDIO April, 1954) the thought that to do this kind of job comfortably, the working top of bench or table should be at about the height of your bent elbow, standing erect. Whether you work with parts held horizontal or vertical, the use of a surface at or very close to the suggested height should land you in that area of comfort which means greater efficiency, surer results.

Returning the assembly to an upright position, guide the bolts projecting from the ends of the low-frequency horns (A8419) through the holes in the back plate of the smaller wood horn, using the rubber spacers provided to insure an airtight fit. Run large cap screws and washers through the top of the horn into the brackets of the phenolic tubes, and tighten by hand only. Neither should you use force to push the two wood shim blocks under the brackets, where they rest on top of the K horn. Start the wood screws through these brackets and into the shims only, stopping short of going into the top panel of the large horn. Play the shims until the brackets of the phenolic tubes have been lifted so that the holt moves freely through the hole at the back of the board. Secure the wood shims with a brad, then turn the wood screws through into the top of the K horn board. Tighten the cap screws just snugly enough so that the tube bolt is free through the back hole. The final move at this stage is placing the washers and nuts on the bolts through the back and tighten snugly, but not too, to avoid strain on the phenolic horn tube.

The photograph (Fig. 8) of a phantom wash drawing of the K horn with woofer in position and the inset of the midrange high-frequency and very-high-frequency units above, shows that the installation of these units is basically simple, despite





AUDIO • OCTOBER, 1955

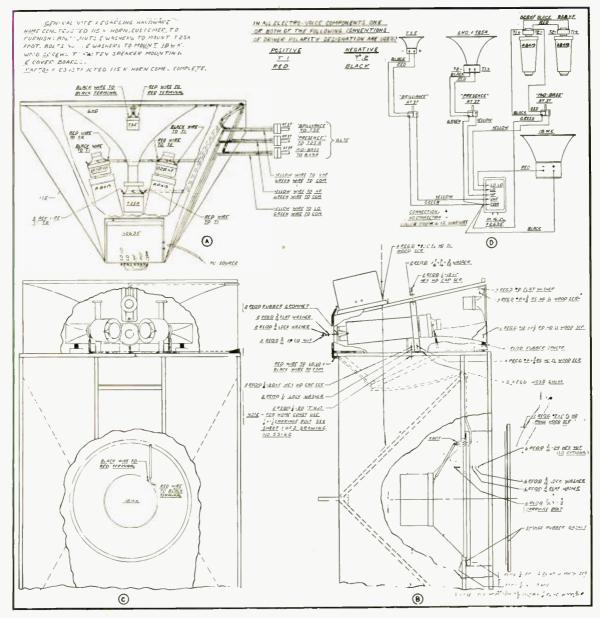


Fig. Electrical connections and placement of the elements of the complete loudspeaker system.

the fact that step-by-step instructions may appear to describe a rather complicated procedure. Our photograph brings to plain view the brackets, shims and supports that you are required to secure with the flat, round, hex and Phillips wood screws; the carriage bolts, nuts, washers, as well as a machine screw here and there, as and where indicated in the cross section (see "B" in Fig. 7).

Step 5

Install the pair of 828HF drivers with terminals facing toward the front ("A" in Fig. 5). Screw these into place on the re-entrant horns. Connect the T1 terminals of the two drivers together, and do likewise with the T2 terminals. Connect a black wire to the T1 terminal of the left unit, and a red wire to the T2 terminal, and bring these wires out past the left front edge of the 200-cps horn assembly, stapling to the bottom board. Finally, mount the crossover network with output terminals toward the back, and centered (as in "A", Fig. 5), which also



Fig. 6. The treble range driver and horn, which radiate the frequency range from 600 to 3500 cps.

AUDIO • OCTOBER, 1955



Fig. 8. Phantom view of low-frequency section topped by the diffraction horn and its three sections—each of which covers a specific frequency range.

shows the placement of the T35 very-high-frequency driver.

Step 6

To install this T35 driver and hornand now is the time-mount its bracket in the pre-drilled holes, on the top section of the 200-cps horn. Align the driver vertically by bending the bracket slightly after it is in place. Follow the schematic ("D" Fig. 7) which indicates black wire going to black terminal, and red wiring to red terminal. "A" in Fig. 7; indicates the A.77 family. 7 indicates the AT37 level controls which may be mounted on a board where shown, or in any other convenient spot, for up to ten feet more wiring may be added to the cable harness. (Figure 9 shows the recommended location of the controls) Incidentally, this harness and other necessary hardware are packed with the driver components in a wooden crate. This is not so in the case of the K horn. The home constructor will need to get bolts, nuts, and washers to mount T25A foot, and for mounting the 18 WK speaker, and wood screws to fasten the speaker mounting and cover boards. These are as specified in the notes on drawing "B" Fig. 7.

Step 7

The 6HD horn and treble driver T25A can be mounted in place, and full instructions for this are packed with the unit. One point more—attach the threaded adapter plate to the bracket and horn and bolt it in place, using the flat gasket supplied with the driver. Having thus pre-assembled the entire unit you can now place it in position as shown ("A" and "B", Fig. 7). Wire the T25A driver as shown in the schematic, the T2 terminal to the black wire and the T1 ter-

minal to the red wire. Run the wires parallel to those from the 828HF drivers installed earlier, and staple in place. Not only a neat thing to do, but easier to identify and handle when testing or servicing the equipment.

Step 8

Having assured proper phasing of the drivers by connecting them as described above, you are ready to bring the crossover network into the picture. Connect the output terminals on the X2635 unit as follows:

1) Splice the black wire from the 18 WK with the three green wires from the high-frequency drivers; connect these to the terminal marked com.

2) Connect the yellow wire from the T35 *brilliance* control to the terminal marked VHF.

3) Connect the yellow wire from the T25A *presence* control to the terminal marked HF.

4) Connect the fourth yellow wire from the 828IIF mid-bass control to the terminal marked Lo.

5) Connect the red wire from the 18WK to the terminal marked Lo-Lo.

6) Connect the crossover terminals marked in to the 16-ohm output of the amplifier. For this purpose use #18 fixture wire for the leads from the speaker system to the amplifier if they are no further apart than 20 or 30 feet; for longer lengths, #16 two-conductor cable is better.

As for the decorative housing of this highly utilitarian horn assembly-generally speaking, the side ports on the housing should measure 9 by 49 inches, to allow proper coupling of the K horn to the walls of the room. Exact positioning is not critical. The 200-cps horn may be masked to some extent without affecting radiation characteristics, but the minimum opening of such a mask must be 10 by 24 inches. Use expanded metal "Shelf X" for the grille, painted or plated; this can be had from any metal supply house, cut to size. The grille cloth, available at your parts distributor. should be 60-40 open mesh weave to allow maximum transmission of the high frequencies. Figure 9 shows a composite plan view of the speaker and suggested dimensions for the furniture housing.

Some Hints on Operation

From its corner location this system will yield excellent radiation of all tones. Furniture is better kept two or three feet away from the sides of the unit. In fact, only if furniture is very large so that it forms an appreciable portion of the low-frequency tones being emitted,




Fig. 9. Combined plan view of the complete speaker and recommended dimensions for the furniture enclosure.


will radiation be affected. For instance, the wavelength of a 30-cps tone is 111 inches, and an object three or four feet square must be actually blocking the side ports to affect radiation at this frequency. Neither will an open window or door, several feet away, cause any noticeable degradation of response.

There are three continously variable level-controls, allowing complete balancing to any acoustical environment. For a musical selection played by a full-size orchestra set the mid-bass control to maximum, and the presence and brilliance control to one-half rotation. This will be a pleasing setting for a large living room with hard walls and few drapes and rugs. Should the room be of average size-about 14 by 20 feetadvance the presence control to about three-fourths rotation. This will require a readjustment of the brilliance control for good musical balance, so it is just as well to advance this control slightly while listening to various passages in the music. If the source material is clean and wide range, the point of balance will be definite; the higher tones then fall into place automatically, and there will be little aural doubt that the proper setting has been achieved. In heavily draped rooms the setting may be as high as 9

or 0, but only in extreme cases.

Ordinarily the *mid-bass* control is operated fully clockwise, at a setting of 0. But it is up to the user, who should set this control to conform to his own listening preferences, but probably never lower than a setting of 5. Once these settings have been made, the controls need hardly ever be touched again. In short, you now have an audio system capable of handling any hi-fi situation.



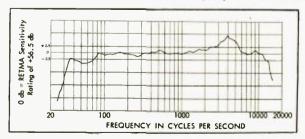

The Acoustic Earset—a New Approach to Conference Applications

D. D. JONES*

Simple, efficient, sanitary "earphone" solves many problems at once—one of the principal advantages is the reduced maintenance required by this type of installation.

SOUND DISTRIBUTION within conference rooms permanently equipped with facilities for simultaneous interpretation is usually accomplished by means of a wired audio system. Several such installations are described in the articles referenced in the bibliography.

These conference rooms, which are primarily used in the field of international diplomacy, may have capacities ranging from a few hundred to several thousand seats to accommodate delegates, spectators, and members of the press. To provide a full interpretation service, each seat must be equipped with terminal apparatus which includes headphones, channel selector switches and, in some istances, individual headphone volume controls.

Experience with many installations has shown that unless special care is exercised in the design of these terminal facilities, the acoustical operating conditions may not prove satisfactory and the physical shocks and stress to which publicly used equipment is ordinarily exposed will result in excessive repair and replacement costs and quite possibly an inferior service.

Practically every contemporary simultaneous interpretation installation utilizes headphones of conventional design as listening equipment. But conventional headphones are not well adapted to this class of service. For example, they cannot be easily integrated into the architectural scheme, which may include several types of auditorium chairs and many shapes and kinds of conference tables. Conventional headphones have too many parts which are vulnerable to loss, breakage or abuse.

As a rule, they are too heavy and the side pressures exerted by the spring steel headbands are too great, causing discomfort and early fatigue to the wearer. In addition, the relatively large unstretched and resonant diaphragm in most headphones is effectively loaded by air at frequencies above 800 cps, and the resulting air coupling from unused but energized headphones leads to annoying acoustic residuals, air-borne crossstalk, and an unfavorable acoustical environments.

A fresh approach to this problem has been needed, and the acoustic earset

*2 West Mill Drive, Great Neck, N. Y.

which is shown in the diagram in Fig. 1 has been found to have very interesting possibilities.

The Acoustic Earset

It will be seen by reference to (B) and (D) in Fig. 1 that this earset is in effect an acoustic waveguide coupler which connects a remotely located electromagnetic driver to the ear through a flexible tube.

The acoustical transmission of sound through tubes is a very old principle. Among early applications were the first mechanical phonograph reproducers and clinical stethoscopes. At least one contemporary manufacturer has adopted the acoustic headset principle for industrial applications, and very acceptable properties are claimed for it.

The principal advantages of an acoustic listening device for conference or auditorium applications are: (1) the total weight can be held to about two ounces, which is one third to one eighth that of permanent magnet headphones; (2) a moderate degree of automatic self-sealing may be incorporated and headband eliminated; (3) the electromagnetic

driving mechanism can be fully protected from breakage in functionally designed chairs or tables; and (4) the acoustic residual from unused earsets can be dissipated in simple acoustical energy absorbers built into furniture.

The main disadvantage is the relatively high energy loss per unit length of transmission tubing. This results in low over-all efficiency as compared to conventional permanent magnet headsets. This loss, which increases with frequency and varies inversely with tubing diameter, is in the order 1.6 db per foot at 1,000 cps for 0.120 in. (1D) tubing.

which is probably the maximum practicable diameter.

The curves in Fig. 2 from Massa⁸ give the attenuation loss in db per foot for tubings of various inside diameters over an extended audio-frequency range. An experimental model of the acoustic earset was equipped with 0.120 in. (ID) tubing 30 in long. The insertion loss characteristic for this section of tubing was derived from the curves of Fig. 2 and is given in Fig. 3. For the transmission of speech a band width from 100 to 6,000 cps is desired. This requirement is easily met by incorporating some high-frequency boost in the driving amplifier circuits.

¹Telex Inc., St. Paul, Minnesota. (Dynamic Earset.)

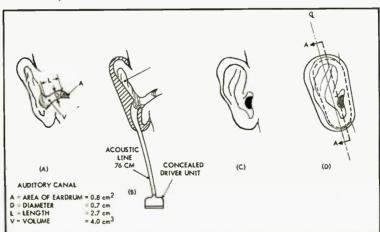


Fig. 1. Diagrammatic sketch of acoustic earset. (A), the ear as seen in cross-section; (B) Developed shape of molded earset through offset sect. a-a; (C) right ear, side view; (D) developed shape of molded earset in place over ear.

Some Criteria

To design an acoustic earset for public usage, there are three points which must receive careful attention:

1. For hygenic reasons, the transmission tubing must be coupled effectively to the external auditory meatus (ear cavity) without making physical contact to the inner walls.

The air leak between the shell of the earset and the head must be kept to minimum for good coupling at low frequencies.

3. Being supported by the cartilaginous connecting tissues between the head and pinna of the ear alone, the total weight must be low and the mass of the supporting lip well distributed over the supporting area.

The Acoustical Problem

To establish efficient coupling between the transmission tubing and the ear cav-

act as an acoustic impedance transducer by giving it an exponential rate of taper. However, an exponential horn can behave as an impedance transducer only when its length L is greater than one-half wave length. To effect transformation at say 200 cps, the total length of the exponential section would have to be:

$$L_{200} = \frac{\lambda}{2} = \frac{c/f}{2} = 2.8 \text{ feet}$$

A horn section of this length cannot be obtained unless a long external flexible matching section is used. For this application, such a section would be an undesirable mechanical feature, and a very short section was used as a practical compromise.

Moreover, an exponential horn coupled to free air will behave differently from one coupled to the ear. The ear is beacoustic compliance2, but the acoustical




Fig. 2. Attenuation characteristics for tubing of various diameters. (After Massa, "Acoustic Design Charts")

lieved to exhibit properties similar to an

203 FREQUENCY IN CYCLES PER SECOND

Fig. 3. Insertion loss characteristics 30-in, section of tubing used.

ity without physical contact is a difficult matter. Good results may be obtained, however, by utilizing the directivity effect of a flared horn section. The mouth diameter is dimensioned to be approximately the same as the ear cavity (about $0.7 \, \mathrm{cm})$.

The horn mouth may touch the pinna or outer parts of the ear, but because it cannot be permitted to extend into the external auditory meatus, the cross section of the mold through the horn is slightly bulged as shown at (B) in Fig. 1.

Also, because the physical dimensions of the earset must conform to the size of a "statistical" ear, in a practical mold there is a small enclosed volume of air Sr in the region directly above the horn section which may exhibit a Helmholtz resonance effect.

At the frequency of resonance, which it is desirable to know the volume velocity Us to the ear will be zero and this frequency and its neighboring regions will be cut off.

Theoretically, it would probably be desirable to make the flared horn section constants are not yet well known.

The Acoustical Circuit and its Analogous Impedances

The diagram of (A) in Fig. 4 shows the elements of an acoustical system which approximate those of the acoustic earset closely coupled to the ear.

G is a constant-force generator driving piston P. L. is the transmission tubing connecting the piston to the earset. L. is the small cavity of the ear terminating in membrane M. The volume S_v is in shunt with the line, and Ls is the constricted neck of the air path leading to volume S_v .

If the earset is not held closely to the head, an air leak will occur around the pinna of the ear and the pressure response at frequencies below approximately 300 cps will drop. To minimize the air leak, a static balance, which will

2 The method recommended by the American Standards Association in Bulletin Z24.9 (1949) for measuring the performance of earphones which rest upon the pinna, utilizes a 6-cc cavity terminating in a standard condenser microphone to simulate approximately the acoustic compliance of the ear. be explained, is employed to maintain a small but constant horizontal component of force (F_r) by the earset against the

The impedance type analogous circuit is shown at (B) in Fig. 4.

The tentative physical dimensions which were chosen for the experimental earset and acoustic line shown in Fig. 6 were substantially as follows and were used to compute the sizes of acoustic mass for elements MAI, MAI, MAI, acoustic compliance C_{As} and the frequency ω at which the volume velocity U_{i} is zero.³ The mks system of units is used.

 T_8 (cross section of tube T) = 3.14 × $0.060^2 = 0.011 \text{ cm}^2 = 0.011 \times 10^{-4} \text{ m}^2$ T_L (length of tube) = 30 × 2.54 = 76 cm =

 E_8 (cross section of ear) = 0.3815 cm² = $0.3815 \times 10^{-4} \text{ m}^2$

(length of ear cavity) =2.7 cm = 0.027 m

S. (length of constricted air path leading into earset) = 1 cm = 0.01 m S_v (volume of cavity in earset) = 5 cm³ = 5×10^{-6} m³

(Continued on page 104)

^a For a rigorous treatment of acoustical circuits see *Acoustics*, by L. L. Berenek, Chapters 7 and 13, McGraw-Hill Book Co., New York.




Fig. 4. (A) Elements of the acoustic system, and (B) the equivalent circuit.

MAKING HIGH FIDELITY NEWS! EXPAND

AND

IMPROVE ANY SOUND SYSTEM



WITH



World Famous Quality

SPEAKERS · TWEETERS · COMPONENTS





ADD the Miracle of Life to the Magic of Music

EXCLUSIVE U. S. DISTRIBUTORS

KINGDOM PRODUCTS, LTD.



the years with the assurance it will never become dated or inadequate for future needs,

Lorenz Loudspeaker and Speaker components are sufficiently varied to give complete listening satisfaction regardless of budget or space requirements, and are versatile enough to fit and improve the quality of practically any sound system. Start planning today . . . with Lorenz!

LORENZ LOUDSPEAKERS and COMPONENTS..



NEW LORENZ LP312

12" WIDE-RANGE LOUDSPEAKER

This quality-controlled speaker can be used as a wide-range reproducer or as the woofer unit of your expanding system. Compare the quality of its sound - then compare the low cost!

EXTRAS: Wider Frequency Range • Heavy Magnet (compare with any 12" or 15" speaker) • Longer Magnetic Path • Smaller Air Gap . Larger Voice Coil . Heavy Duty Non-resonant Cast Aluminum Frame . Multi-Parameter Cone.

These and other features of the LP312 result in increased efficiency. lower distortion, improve internal

resonance damping and transient response, give even distribution of sound and a tonal quality free from "metallic" effects.

SPECIFICATIONS:

Impedance at 800 cps.: 16 ohms. Frequency Range: below 20 to above 14,-000 cps. Power rating: 25 watts average — 35 watts peak. Magnet wgt.: 61.5 ozs. Voice Coil Diam.: 1.5". Overall Diam.: 12". Baffle Opening: 10%". Depth: 634". Heavy Duty Cast Aluminum Girder-constructed-Frame.

AUDIOPHILE NET: \$49.50



NEW LORENZ LP208

8" WIDE-RANGE LOUDSPEAKER

This new 8" Speaker has enormous flexibility. It can be used as a widerange speaker, alone or in groups. as the high or low end of a 2-way system, or as a mid-range speaker in a 3-way system. Will fit any 8" cabinet, will load most 12" cabinets.

EXTRAS: Greater Output . Wider Frequency Range • Extra-size Magnet • Over-size Voice Coil • Smaller Air Gap • Heavy Duty Cast Aluminum Frame — Rigid Girder Design • Permanently-Flexible Self-Damped Cone-Free Coupling . . . all mean clean,

clear tones, superb transient response, minimum distortion!

SPECIFICATIONS:

Impedance at 800 cps.: 8 ohms. Frequency range: 35 to 14,000 cps. Power Rating: 15 watts average, 21 watts peak. Magnet wat.: 28.5 ozs. of high efficiency ALNI. Voice Coil Diam. 1.0". Overall Diam.: 8.5". Baffle opening: 7.25". Depth: 4.0" Heavy Duty Cast Aluminum Girder-constructed Frame to eliminate frame resonances.

AUDIOPHILE NET: \$22.50

LORENZ LP-65 HORN-TYPE TWEETER

The Lorenz LP-65 has many unusual features. For example, the soft plastic cone, round in shape for even sound dispersion, insures smooth, sweet sound rather than the oftenheard shrill, harsh, metallic overtones of other tweeters . . . and because of its solid back, it can be placed in any enclosure with any speaker, without the usual interaction.

SPECIFICATIONS:

Impedance at 800 cps.: 5.5 ohms. Frequency range with High Pass Filter HP-1: 2,000 to 17,000 cps. Sound dispersion: 120 degrees in all directions (achieved by round design). Power Rating: 2 watts. Outside Diam.: 21/2". Cone Diam.: 21/4". Mounting hole in baffle: 21/4" flared to 21/2"

AUDIOPHILE NET: \$8.50



.....Never Grow Old!

YEARS AHEAD IN ENGINEERING!

Lorenz Loudspeakers are known the world over for their brilliant reproduction and clarity — the result of continuous Lorenz research and fine Lorenz craftsmanship. Listen to a Lorenz, for a new experience in listening — clean, crisp, accurate sound reproduction that will stay fresh through the years. ALWAYS GROW UP... NEVER GROW OLD!



... ADAPTABLE TO ALL SPEAKERS... IMPROVE ALL SOUND SYSTEMS!



The LORENZ LP 312-1 and LP 312-2 12" COAXIAL and DIAXIAL SPEAKERS

By adding the Lorenz TB-2 or TB-1 to the standard Lorenz 12" wide-range speaker, you have the advantage of a diaxial or coaxial speaker with extended high frequency output, the range extending from 20 to over 17,000 cps. (This is the Lorenz "Growth" approach in action.)

LP 312-1

16 ohms

20-17,000

27 watts

121/4"

103/8"

63/4

SPEC	IFIC	ATI	ON	S
------	------	-----	----	---

Impedance at 800 cps: Frequency Range: Power Rating: Overall diameter: Baffle Opening: Depth:

AUDIOPHILE NET: \$61.95

LP 312-2 16 ohms 20-17,000 29 watts 121/4" 105/4"

\$71.79

LORENZ TB-1 and TB-2 TWEETER COMBINATIONS

FOR ALL 12" LOUDSPEAKERS

If you desire to extend the range of your 12" speaker, a Lorenz Tweeter Combination will fulfill all your expectations. A specially designed, rigidly constructed steel bracket which fits across the 12" speaker supports 2 Lorenz LP-65 Tweeters coaxially, clearing the cone, but not projecting beyond the front of the speaker mounting baffle. The rigid metal construction discourages resonance in speaker or tweeter. Modernize your own 12" Speaker!


TB-1 - Bracket and single tweeter completely assembled and ready for installation) AUDIOPHILE NET: \$11.85

TB-2 - Bracket and two tweeters completely assembled and ready for installation) AUDIOPHILE NET: \$21.69



The LORENZ HP-1 HIGH PASS FILTER

The HP-1 with a nominal crossover at 5,000 cps. introduces highs into the tweeter at the rate of 3 db per octave starting at 2,000 cps.



SPECIFICATIONS: Mounting Dimensions (Square Base): $1\frac{1}{2}$ between hole centers, Over-all height: $2\frac{34}{2}$ AUDIOPHILE NET: **\$4.95**


HERE'S HOW YOU CAN BUILD UP YOUR LORENZ SOUND SYSTEM



System range: 40-17,000 cps. Power rating: 17 watts.



System range: 20-17,000 cps. Power rating: 27 watts.



System range: 20-17,000 cps. Power rating: 29 watts. Greater High Frequency

3-WAY SPEAKER SYSTEMS -



System range: 20-17,000, Power rating: 42 watts.

MULTIPLE SPEAKER SYSTEM

Use multiples of each of the speaker types to any desired total power output.



2) Sound Reproducers

ADD the Miracle of Life to the Magic of Music



OFF THE FLOOR and OUT OF THE WAY!

Truly a high fidelity Speaker System that is Heard . . . not Seen

Ingenious, modern. the triangular cross section horn design uses the walls of your room and the speaker baffle as riaid boundaries.

The Sound Corner consists of the LP-215 Woofer, LP-65 Tweeter, HP-1 High Pass Filter. Frequency response: 40 to 17,000 cps. Impedance: 8 ohms. Power rating: 14 watts. Comes ready to use . . , requires no additional cabinet. Size: 31" x 271/2" x 113/4". Blonde finish.

FRONT VIEW

AUDIOPHILE NET:

Here is the compact corner wall 2-way speaker system that utilizes the horn principle - recognized as basic by sound engineers and enthusiastic listeners for the reproduction of smooth, resonance-free bass. Since the Lorenz Sound Corner uses no floor space and is as easy to install as hanging a picture, it has gained wide acceptance by music lovers everywhere.

Use it everywhere — in playroom, kitchen, patio - any room in the house. Use it as your primary sound system or as an extension system to your main equipment. It can be painted or wall-papered to match the decor of your home.



Here is listening pleasure packaged in attractive convenience! Imagine a speaker system small enough to put on the shelf of your bookcase, with all the high fidelity features of systems many times its size. Employing the principles of the Helmholz resonator and phase inversion techniques, the KAL Audette gives you wide frequency range (45-17,000 cps.) and astounding balance of natural sound.

The low price enables you to have an excellent binaural system by using them in pairs.


SPECIFICATIONS:

MP.I FILTER

TWEETER

LP215 Woofer, LP-65 Tweeter, HP-1 High Pass Filter. Power rating: 14 watts max. Dimensions: 11" H., 23¾" W., 10" D. Finish: Richly grained maroon leatherette covered cose with contrasting buff and gold beading trim.

AUDIOPHILE NET: \$49.50

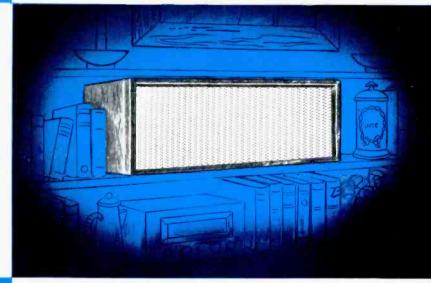



LORENZ SKL-100 ELECTROSTATIC HIGH FREQUENCY LOUDSPEAKER

The SKL-100 was developed by Lorenz to meet the need for a low-cost, high frequency reproducer of the "tweeter" class. It is an electro-static unit, using 'artricol forces developed between the two plates of a condenser as the source c rdio output.

Unlike other tw SKL-100 has been equipped with a louvered deflection plote which dist. gh frequency sound, ordinorily very directional, over a wide angle. It is also possible to connect two SKL-100s to the same filter network and mount them on either side of the "woofer", minimizing even more the directional effect of high frequency sound. AUDIOPHILE NET: \$4.95

PRODUCTS, Ltd. 23 Park Place, New York 7, N. Y. • WOrth 4-8585



Building Simplicity into the Hi-Fi System

ROSS H. SNYDER*

Interconnection of the many elements of a hi-fi system demands some clear thinking if complete satisfaction is to be obtained. In particular, the method of connecting a tape recorder in the system for most convenient operation is outlined clearly by the author.

HIGH-FIDELITY COMPONENTS for home entertainment systems have been developed in such numbers and variety that rigorous application of good over-all systems' design has been almost impossible. The popularity of high-fidelity equipment has increased at such a pace that designers of components of all kinds have been faced with the necessity of building in a sort of makeshift universality which made it possible, in general, for the purchaser of an assemblage of these components to plug together a system which would function, but usually at something less than optimum.

Too Many Knobs

The commonest defect of an assembled ystem is multiplicity of controls, many of which perform duplicate functions. The likelihood of imperfect performance is great when such systems are operated by people whose interest is mainly in the music, not in the equipment upon which it is played. Typically, a radio tuner will have on its face a control for the selection of FM, AM, Phonograph, Tape, TV, etc. It will also have a volume control. Frequently such a tuner is selected especially because it has relatively few controls, and is connected into an elaborate audio control box, which will posphonograph inputs, phonograph equalizer controls, power switch, volume or loudness control (or both), and separate bass and treble tone controls. These control boxes are usually connected to power amplifiers which have, themselves, at least a gain control, and sometimes another set of tone controls and selectors. These are happily rare now that the basic "flat" amplifier is the norm. With a basic flat amplifier, adjustment of the main amplifier gain control is required only at the time of installation, and it is supposed to be set by the installer so as to provide correct gain for the audio control box with which it is used. There is a tendency for many users to adjust the power amplifier gain so that the control box volume control is rotated about one-third at comfortable room level. Those control boxes which contain loudness controls are usually contributing considerable boost" at this rotation, and this effect is removed only when thunderous volume is being delivered into the living quarters by the equipment. The function of the loudness control should be to remove all artificial bass boost at a sound level equal to that which would be heard if the listener were in the room where the recording was made. Complete instructions on this adjustment are more and more being included in the Instruction Manuals which accompany high-quality equipment, and if the listener is so minded, the facility for proper functioning of his loudness control is at

The Maximum Hum Central

But the handling of cascaded volume controls, one on the tuner and one on the control box, for example, is not so simple. The way is always open, if not for the high-fidelity enthusiast in the family who is responsible for the purchase and installation of the equipment. at least for other members of the family to adjust the equipment for maximum hum, or for maximum distortion. A tendency will be found, for example, to operate the volume control on the tuner at a medium setting, and then, upon interruption, for the listener to turn the volume down temporarily at the audio control box. Following the interruption, the listener may find it most convenient to raise the volume level again, this time using the tuner control. Thus, those amplifier tubes which follow the tuner volume control, may well be driven far into distortion, while the volume level of sound in the room is not particularly high, having been reduced by the control box knob. If the knob on the control box is a loudness control, this function will also be disturbed. On the other hand, if the procedure is reversed, and the level of sound reduced at the tuner, then later raised at the audio control box, the "maximum hum" situation will exist. The level of sound through those amplifier stages which exist after the tuner volume control, but before the audio control box volume control, may be sufficiently reduced as to be comparable to the internal hum level, and raising the amplification with the control box knob after the unnecessary reduction will result only in an increase of hum and unpleasantness. The remedy is, of course, to eliminate one of the volume controls, or at least to remove it to a screwdriver adjustment at the back of one of the components, and to leave in the hands of the listener only a single knob for the control of level. In this manner, adequate level in lines between components may be set at the time of installation, for the best compromise between low distortion and good signal-to-noise ratio. The difficulty of predicting what amplifier will be used with a tuner of given design is, of course, the reason for incorporating the control into the tuner in the first place. The thought was that it's better

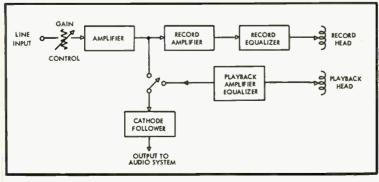


Fig. 1. Block diagram of a typical high-quality tape recorder designed for home use.

^{*} Ampex Corporation, 934 Charter St., Redwood City, Calif.

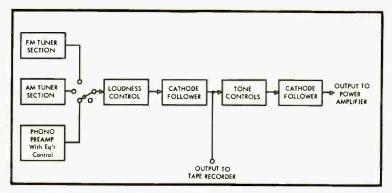


Fig. 2. Block schematic of one model of deluxe FM-AM tuner with magnetic phono preamplifier and tone controls.

to provide more controls than necessary, rather than to eliminate one which may be needed. But it was a bad thought.

Volume controls, as an industry practice, probably should be left off radio tuners, unless these tuners also incorporate phonograph preamplifiers and tone controls, and are intended to serve as complete control centers as well as tuners. If unnecessary controls are provided, the installer ought to remove them. More than one maunfacturer follows good practice in this, and others should, for the greater convenience of users and for less opportunity for unpleasant sound in the home. Only those few listeners who wish to eliminate all functions from their systems excepting radio, and who wish no tone controls of any kind will need gain control on the basic tuner. Those may be of sufficient technical skill to devise a convenient volume control for themselves.

"How Many Selectors?"

The duplication of selector controls appears to be a harder problem. On those radio timers which are designed as an adjunct to an audio control box, there is no justification for the provision of anything other than an AM-FM control, possibly with broad and sharp positions on AM, and AFC or no-AFC positions. Incorporation of selector positions for phonograph, tape, TV, and other sound sources may appropriately be provided only on tuners which also possess magnetic phonograph pickup preamplifiers, and are designed to function as combined tuners and audio control boxes. The ultimate simplification in control is probably provided by those timers which have been designed for two-channel stereophonic service, and bring each of the two outputs, AM and FM, to separare jacks, for delivery to the audio control box. Such tuners may readily be connected into audio control boxes so that selection of phonograph. AM. FM, tape, etc., may be made on one knob on the audio control box, and there only. Realistically, no selector controls other than those for AM or FM should be incorporated into tuners which are designed as adjuncts to audio control

boxes, but only into the tuners which are designed as combined audio control centers and tuners. The very least which we should ask is that the knobs on the front panel of these tuners should be arranged so that if the a.c. switch and volume control are removed, the panel remains balanced and symmetrical. Many home high-fidelity system owners insist that all knobs be left on the panel, even though some are superfluous or rendered functionless, in order to preserve balanced appearance; it should be made possible to preserve both good appearance and good operation.

The Underfed Tape Recorder

As the high-quality magnetic tape recorder becomes a staple in the list of components in a high-fidelity home system, a provision for its incorporation in simple plug-in form becomes a necessity. The logical place for the incorporation of plugs which are intended to connect to the tape recorder input and output is in the audio control box, or into the tuner which is intended to function as an audio control center.

A block diagram of a typical high-quality magnetic tape recorder is shown in Fig. 1. In those recorders which use a common magnetic head as both record and playback, the selector switch is so ganged as to perform essentially the same function as that shown. Typically, the line input of the recorder presents a

high-impedance load, which may be bridged across a number of available points inside the audio control system, and requires no more than 0.5 volts rms to drive the recorder to maximum record level. This is a simple requirement to meet, although consideration for it has often been omitted from commercial components. The output from a typical magnetic recorder is of low internal source impedance, and relatively high level, which will adequately drive any of many possible points in the audio control system.

There are several typical arrangements for tape recorder connection. Fig. 2 illustrates a widely sold deluxe FM/ AM tuner with magnetic phonograph preamplifier and tone control, designed to function not only as a timer, but also as an audio control center. At least four input jacks are provided, one of which is intended for tape. An output is also designated for connection to the tape recorder. The signal which is delivered for recording to the tape recorder is. unfortunately, unsatisfactory. The user may reasonably be supposed to be listening, over his loudspeaker, at the same time he is producing a tape recording. The timer selector may, then, be set for FM, for example, the loudness control adjusted to comfortable level. The output to the tape recorder, then, located after the gain control, is extremely low in level, and is exaggerated in bass, because of the effect of the loudness control at these low listening levels. Typical peak voltages obtained from this array will measure around 50 millivolts. Not only does this provide inadequate drive for the recorder, but it also produces a tape which is artificially heavy in bass. The output to the tape recorder could hardly have been located at a worse position. So far as proper level and proper equalization for the production of a flat tape recording are concerned, the tape recorder jack might better be connected between the loudness control and the selector switch. A cathode follower would be advisable, of course, as isolation, and in order to assure that the load of the tape recorder and the capacitance of the interconnecting cable would not affect the over-all performance of the system, or of the recorder.

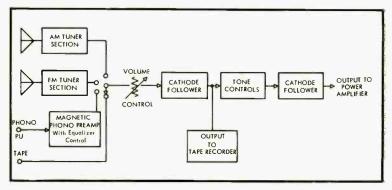



Fig. 3. Arrangement of popular-priced FM/AM tuner with phono preamp and tone controls.

The Case Of The Howling Tape Recorder

With the configuration of Fig. 2, however, still another source of unpleasantness for the listener is offered. Assuming that a recording has been made, the listener may now switch the selector control on his tuner to the fourth position, nto which the output of the tape recorder has been plugged. Referring to Fig. 1, if the tape recorder selector switch has been left in the "record" position, a feed-back path is created from loudness control through cathodefollower to tape recorder input, to tape recorder output, to selector switch, to loudness control. The result is usually a loud howl. This effect can be avoided, of course, if the listener is careful alays to turn his tape recorder switch to "playback" before he changes the position of his tuner selector control, but it would surely be good design to prevent so likely a cause for unpleasantness.

Figure 3 is of a lower cost tuner than that in Fig. 2. This unit does not have the fault of presenting to the tape recorder an artificially unbalanced signal, since the volume control is not a loudness control, but it does have the same fault as the tuner of Fig. 2 in being likely to be so used as to present a very small signal to the input of the tape recorder, due to the listener's having set his volume control for comfortable listening, rather than for adequate level for recording. This configuration also possesses, still, the possibility of feedback "howl."

Figure 4 outlines the configuration of a popular deluxe one-piece power amplifier and audio control box. In this case, the output to the tape recorder is of adequate *level*, but has been subjected to "tone control" whose purpose is primarily that of adjusting the sound for most comfortable listening, rather than for flatness. There is good reason for tone controls, of course. But a flat signal should nevertheless be presented to the tape recorder. Tone controls are for playback, and not for recording. It should be assumed that the listener will wish to adjust his tone controls, every time he listens, for conditions which exist at the moment, and which may not always be the same. To feed a signal through the same set of tone controls twice is to 'louble' the effect of the tone controls

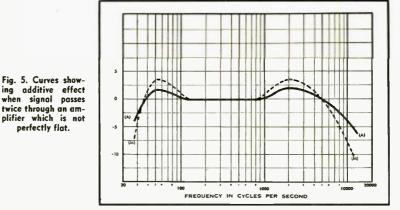

upon playback. On only one generation, with such a process, a 12 db-per-octave bass boost slope may be obtained, or a very sharp high-frequency cut-off be introduced.

Double Dipped Tone Controls

Even if the "tone controls" are set at the "flat" position, which often is not marked accurately on the control panel, this position usually is a little off true flatness. Typical of the "flat" position on tone control systems is the curve shown at (A) in Fig. 5. This curve, it is true, is "± 2 decibels from 50 cycles to 8,000 cycles." But, suppose the tape, which has been recorded to this degree of "flatness," is now played back, through the system shown in Fig. 4. Even though the tone controls be left unaltered, the playback curve differs from flatness by twice the amount of Curve A, forming Curve M. This, flat now only by ± 4 decibels from 50 to 8,000 cycles, is sharply rolling off at both low and high frequencies, with severe "bumps" in response. Small deviations from flatness in the tone control system, which are entirely negligible so far as the original function of the controls is concerned, now become major sources of unpleasantness, which may be blamed upon the tape recorder, even though, in this example, the tape recorder was assumed to be perfectly flat in frequency response.

If the tone controls had been set for only a little departure from the nominally "flat" position, the results would have been even worse.

Figure 6 illustrates a high-quality commercial audio control box which provides the tape recorder with a flat signal of adequate level. With this control box, the possibility remains for feedback, if the listener chances to select "tape" on the control box before switching the re-corder to "playback," but all other considerations of good practice are observed. The general configuration of the commercial system in Fig. 6 is shown in Fig. 7. Great flexibility in the arrangement of loudness or volume controls, tone controls, sharp high or low cut-off filters, and so forth, may easily be designed without essentially changing this arrangement. Only the feedback problem remains.

High Fidelity Unlimited

Figure 8 shows an ideal configuration for incorporating a tape recorder into a high-quality home music system. Whether the arrangement for this connection is made in a tuner which is designed also as an audio control center, or in a deluxe audio control box is unimportant. The provision for placing the tape recorder in series with the circuit is the key to the removal of any possi-bility of feedback "howl." A low impedance-source signal to the tape recorder line should be provided—cathode followers work well. A jack should be provided for this output. If, then, no connection were normally provided between this and the jack which is to bring back the output of the tape recorder, the possibility for series insertion of the recorder exists, A simple jumper may be provided as standard equipment, to be removed when the tape recorder is installed. With this connection the tape recorder is either left on at all times when the system is being used, or the tape recorder may be provided with a means of automatically connecting its input to its output, directly, when the recorder is turned off. Such an arrangement is offered as standard equipment on some tape recorders which have been designed for home use, and is available as a factory modification on others.

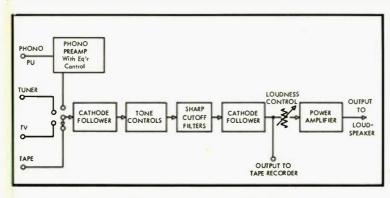


Fig. 4. Block diagram of deluxe one-piece power amplifier and audio control unit.

Hi-Fi Surgery

When the owner of a high fidelity system, on which he may have spent many hundreds of dollars, buys his tape recorder, it is too late for corrective action by the manufacturer of his tuner or of his audio control box. If the machine is to function well as a unit, some sort of "corrective surgery" is going to be needed. This may range from simply unsoldering one connection from its present location, and soldering it to a new one, all the way up to the incorporation of an additional tube, and the changing of sev-

eral wires. None of these procedures is beyond the skill of a typical hi-fi technical enthusiast, but probably ought to be undertaken only by his serviceman if the listener is one of the many thousands of newcomers to the field whose interest lies mainly in the music and not in the knobs and gadgets.

A tuner like that illustrated in Fig. 2 might be modified in either of two ways. A single wire will be found which leads from the jack marked "output to tape recorder" to a certain pin on one of the tubes. This wire may be unsoldered from the tube, and transferred to the selector




Fig. 9. Schematic of cathode follower stage which can be added to a tuner or control unit to provide suitable coupling to a tape recorder input.

HONO th Equalize PU TUNER LOUDNESS OUTPUT TO CATHODE FOLLOWER TONE CATHODE CONTROLS **POWER** FOLLOWER AUX I CONTROL AUX 2 OUT PUT TO TAPE RECORDER

Fig. 6. Block schematic of high-quality commercial audio control unit.

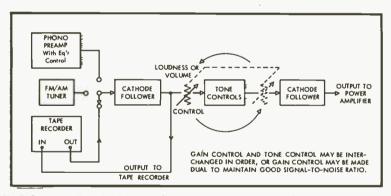


Fig. 7. General configuration for control box or tuner control system. Possibility of feedback is still present even with this arrangement.

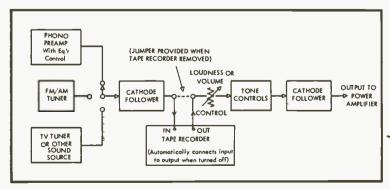


Fig. 8. Ideal configuration for incorporating a tape recorder into a high-quality home music system.

switch, being soldered to that lug on the switch which represents the "rotor" or, if more convenient, to the "top end" of the loudness control. A more elegant solution would be to cut the chassis at a convenient point, to mount a new tube, such as a 6C4, in a tube socket, and to connect this newly added tube as a cathode-follower. The wire leading to the "output to tape recorder" jack would, then, be connected to the output of the cathode-follower, while the grid of the newly added cathode-follower would be connected to the rotor of the selector switch. Appropriate values for such a cathode-follower are shown in Fig. 9. Connection of the follower to the tuner's filament supply will probably present little problem, but the selection of an appropriate connection for the plate should be done most carefully. A point on the schematic diagram of the tuner should be found at which considerable "decoupling" has already been provided, and at which a large capacitor is already connected. The plate of any cathode-follower should be connected to a high-voltage d.c. source which is effec-tively "grounded" for audio signals. In most cases, it will be found that the follower will function well if its plate is connected to the same point as the highvoltage end of one of the plate resistors in a low-level audio amplifier stage.

If. in the case of a tuner like that in Fig. 3, no attempt is made to install a cathode-follower, care must be taken that the wire which carries the signal to the tape recorder is of the "low-capacitance" shielded type, and that the input impedance of the tape recorder is not so low as to "load" the volume control unduly. Otherwise, some distortion could occur, and if the wire were of high capacitance, the high-frequency response of the system could be impaired.

The audio control box illustrated in Fig. 6 offers the possibility of simple wiring changes in order to effect the "series" configuration of Fig. 8. It is possible to lift the connection between the cathode-follower and the loudness

(Continued on page 99)

you can tell it's high fidelity just by looking at it



There is a distinctive look about Harman-Kardon High Fidelity instruments that makes them instantly recognizable. They don't look at all like conventional radios or phonographs - and they don't sound like them either.

In fact, when used with an appropriate loudspeaker and record player, reproduction of radio and records is so good that, in many respects, it actually surpasses the concert hall's best.

A high fidelity performance in your living room is fashioned from program material, broadcast or recorded under ideal technical conditions. This material is faultlessly received or amplified and is then reproduced with precise adjustment for the acoustics of the room and the hearing characteristics of the listener.

Thus, free of the acoustic limitations of the concert hall, uncompromised by the accident of seating location and untroubled by audience noises, a superb high fidelity performance is assured ... you and the music meet under ideal conditions.

Send postcard for FREE illustrated catalog

kardon harman

520 Main Street, Westbury, L. I., N. Y.

The New Minshall Organ

RICHARD H. DORF*

In Two Parts-Part 2

Concluding the description of an electronic organ of modern and efficient design which results in an instrument of excellent performance at an economical manufacturing cost.

The key-switch circuitry of the new models is much changed from the old system, both electrically and mechanically. The high impedances of the old generator outputs made shunt keying mandatory; that is, switches were normally closed, grounding undesired tones. Not only did this require more components and more labor, increasing the cost, but a switch with nonfunctioning contacts would cause a "cipher," a continuous sounding of the tone. Inevitably any switch will once in a while fail to work, but it is far less disturbing to have a failure of a tone than to have it sound continuously.

The new system, drawn in part in Fig. 10, employs the series keying method, with normally open switches, Each tone is brought to the appropriate switch through a 0.1 megohm isolating resistor. When a key is played the switch closes, passing the tone to output busses which run the length of the assembly. The switches are actually three-circuit ones, so that when a key is played tones of 4-, 8-, and 16-foot pitches are brought

* 255 W. 84th St., New York 24, N. Y.

to the respective busses. The resistor-capacitor networks to which the busses are connected are key-click filters, tailored in values to the specific ranges which they cover, so that clicks are almost eliminated but minimum harmonic




Fig. 11. One end of a key-switch assembly, showing the switch blocks, printed-circuit output busses, and separators.

structure of the tone is affected.

The key switches themselves are no longer the flat blade type. When used for series switching these units have too large a capacitance between the opened blades, and there is leakage of unkeyed tone into the rest of the system; the result is an annoying whine in the background. Part of a key-switch assembly, opened and fanned for view, appears in Fig. 11. The switches themselves are blocks of phenolic in which three silveralloy fingers are set. A small phenolic actuator is placed over the fingers and when the key comes down it hits the actuator, which forces the fingers down. Each finger strikes a gold bus wire running at right angles to it. Because the entire switch consists only of two thin crossed wires capacitance across an open switch is negligible and there is no audible leakage whatever. The combination of materials results in trouble-free contacting over a long period.

Pedal Tone Generator

The main tone generators provide only five octaves of tones equivalent to the

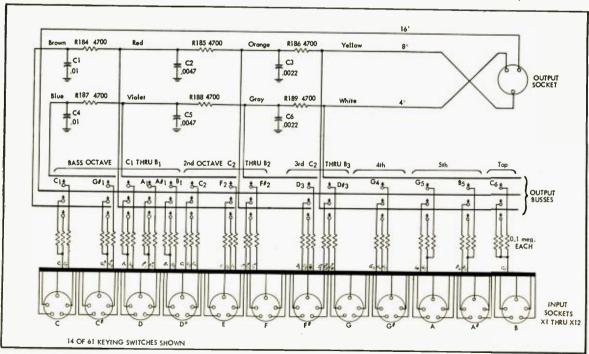


Fig. 10. Key-switching diagram for the swell manual. Great wiring is the same, with addition of plugs and cables to carry tone up to swell,



THE REBEL K-3

Identical acoustically with the KR-3, first and largest of the Klipsch-designed Rebel series of corner folded horns. Using the mirror images of room walls at a corner, the K-3 extends bass down nearly to 30 cycles! Two companion Rebel kits are more economical but only in price and size.



* Trademork

K-3 . . . \$54.00

Prices slightly higher west and south

THE "ST" SERIES

Wall storage units . . . ten basic Cabinart designs in kitform or assembled, ready to finish. Each is tailored to the needs of hi-fi installations. The Series includes a nine cubic foot bass reflex cabinet.



Prices from \$21.00 to \$36.00

FURNITURE KITS

The new 27K and 28K typify Cabinart kit utility and economy. Both point up the unique design functions necessary to the correct hi-fi

installation.

scrap of sawdust left over!



Equipment Cabinet \$51.00



Bass Reflex

\$39.00

WRITE FOR THE NAME OF YOUR NEAREST DEALER AND MAIL ORDER HOUSE.



... the pioneers in vadio furniture for high fidelity.

99 NORTH 11th STREET, BROOKLYN 11, NEW YORK

Equipment/Speaker Enclosure Kits The Rebel Speakers

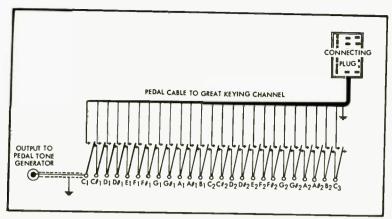


Fig. 12. Diagram of the pedal-switch assembly. Tones from the main generators are fed through the large connector to the switches.

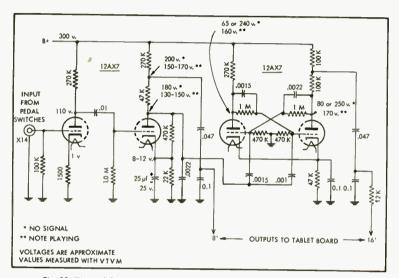


Fig. 13. The pedal generator, consisting of amplifier, wave shaper, and flip-flop.

8-foot range of the standard 61-note manuals. The 4-foot tones for the upper manual octave are repeats of the upperoctave 8-foot tones and the lower-octave 16-foot tones are repeats of the 8-foot lower-octave tones. In the earlier models 16-foot pedal tone was derived from a "resultant bass" arrangement which mixed the lowest 8-foot tone with its musical fifth and produced a beat note an octave below the fundamental. The actual 16-foot component of this system was small and the idea unsatisfactory from every angle but cost,

In the new models actual 16-foot tone is derived from a special pedal generator which requires only two tubes for the entire pedal section. It is actually not a generator at all but a wide-range frequency divider.

Figure 12 is a schematic diagram of

the pedal keying switches. Each switch is a single-pole double-throw unit and the diagram shows the switches in normal (unkeyed) position. Eight-foot tone from the main generators is fed through the connector and cable to each of the switch contacts as shown. When any pedal is pushed, its switch changes positions and the corresponding 8-foot note is brought to the output. Because of the switching arrangement, only one tone at a time can appear at the output, the lowest of any number played simultane-

The pedal generator is shown schematically in Fig. 13. The 8-foot tone from the main generators through the pedal switches goes to the first grid of a 12AX7 amplifier and from its plate to the second half of the tube which is a wave shaper giving the tone the proper shape to trigger the following flip-flop circuit. The second 12AX7 is an aperiodic flip-flop which is nonfrequencysensitive over a wide range. The 16-foot

Fig. 14. The tablet board holds the tab switches and the chassis containing bus amplifiers, tone filters, and preamplifiers.

output is taken from one plate circuit so that for every two input cycles there is one output cycle. The 8-foot output is taken from the second plate circuit of the first tube. Both are fed to the tone-color section. This is an extremely neat, inexpensive, and effective method of deriving real 16-foot tone.

Tablet Board Circuitry

The stop filters, bus amplifiers, and preamplifier are all located on the tablet board assembly, which consists of the wood board above the swell manual on which the stop tablets and other controls are mounted, to which is attached a metal channel containing the circuitry. This is shown in the photograph of Fig. 14, Figure 15 is the schematic diagram of the bus amplifiers, whose function is to amplify preliminarily the voltage appearing on each of the manual keving output busses before it is applied to tone filters.

Each of the triode voltage amplifier grids is fed signal from one keying bus. the bus being terminated by a 12,000ohm resistor. The 16-foot tones from both manuals go through to the grids without isolating resistors, but the others have resistors between bus and grid. Each triode has voltage feedback, a capacitor and resistor from plate to grid; the purpose of this is to give an effectively low output impedance.

There is one coupler on the organ, a Swell to Great. This means that when the coupler switch is closed, as it is in the diagram, 8-foot and 4-foot tones keyed on the great manual will pass through the 8-foot and 4-foot filters associated with the swell manual. This means, of course, that they must be mixed into the swell busses. Note how the 4-foot great tones are handled for this purpose. Tone from the keying bus is fed to its tube through a resistor and to the coupler switch which, when closed, injects 4' great tone into the grid circuit of the 4' swell amplifier tube. An important point in this process is that the 4-foot swell output from its amplifier and the 4-foot great output from its amplifier must not change in level with operation of the coupler switch. Effects on the 4-foot great amplifier are prevented by taking the coupling line directly from the bus ahead of the isolation resistor and making sure that when the switch is closed this point is shunted by nothing which would be comparable to 12,000 olmis.

Preventing some effect on the 4-foot swell tone is not so easy, but it is done here in a very neat way. The output of the 4-foot swell amplifier depends on the magnitude of the feedback. This depends on the total value of resistance between grid and ground, since this resistance is the shunt leg of a voltage divider for feedback. The value of the 4-foot swell voltage reaching its grid is also dependent on the total value of the series resistors since these are the shunt leg of a signal voltage divider. When the coupler switch is closed, the 4-foot swell voltage

AUDIO • OCTOBER, 1955





RESONANT pipe or back-loaded . . .

Exponential, parabolic, or something else . . .

Which type of speaker system gives you the full concert hall power you want...the dynamic quality of rich bass tones...and in an enclosure of reasonable proportions?

In tests by The Audio League, Pleasantville, N. Y., National's Catenoid speaker system was compared A-B with a competitive exponential horn.

Let's forget that the exponential horn costs twice as much. What did the League report on Catenoid? Just this:

"We have never heard a smoother over-all sound. The balance of lows, middles, and highs was well-nigh perfect. And for styling and size . . . the Catenoid was far superior."

About damping? The report goes on:

"Our transient response tests indicate the Catenoid's damping to be as much as an order of magnitude better than a (competitive resonant

pipe system named here) and a (competitive back-loaded horn) which we tested at the same time."

There's no secret to Catenoid's superior performance...except that it represents the first basically new approach to speaker systems in a decade: catenoidal design instead of exponential. It's a true corner horn (not back-loaded or a semi-horn) with a three-way speaker array: the full catenoidal horn for 30 to 300 cycles; a special direct radiator for 300 to 6500 cycles; a super tweeter extending the high range beyond 17,000 cps. And all high-frequency fundamentals of the musical spectrum are fed through the midrange speaker to add a feeling of "presence" you've never quite experienced before.

For performance, enclosure size, and price... National's Catenoid is the best buy today in speaker systems. You can hear it only at an authorized full-line National Company distributor's sound room.



tuned to tomorrow

Authorized full line National Company distributors are identified by this sign

National

Manufacturers of high-fidelity record changers, AM/FM tuners, preamplifiers, amplifiers, and speaker systems.

Write Dept. A-102 for full specifications NATIONAL COMPANY, INC. 61 SHERMAN ST., MALDEN, MASS.

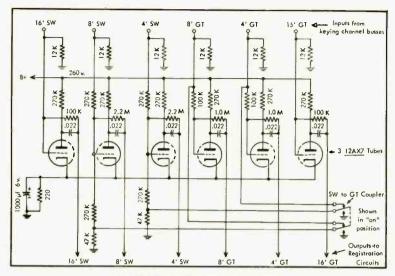


Fig. 15. Bus amplifiers and coupler system.

at its grid is decreased because of the lessening of the total resistance between the grid and ground. However, this decreases the feedback voltage fed around the 4-foot swell tube, so that its gain rises just enough to restore the former output level, now with the addition of

the 4-foot great tone. The same process applies to the 8-foot coupling.

Figure 16 shows the tone filters for the great stops, of which there are eight. The idea here is the same as in the Baldwin and the Schober organs—formant filters which simulate the acoustical effects of

the various spectrum characteristics of different instruments or types of organ pipes. These filters are less complex than those in the Baldwin and Schober because the initial tone is not so complex and not as much filtering can be or need be done.

The swell registration is shown in Fig. 17, and again the principle is the same. Here, however, two little tricks have been used. Among the 12 stops there is a 2-foot salicet, which seems surprising in view of the fact that there is no 2-foot keying bus. The salicet is actually operated from the 4-foot line, but it is a very stringy tone (note the high-pass filter) almost devoid of fundamental content. Because of the lack of 4-foot fundamental it actually sounds an octave higher than, say, the 4-foot flute.

The second trick is in the clarinet filter. The normal clarinet tone is almost devoid of even harmonics. In the Baldwin organ the symmetrical tone without even harmonics is obtained for this purpose by an outphasing circuit, which is patented. In the Minshall the same effect is achieved (over a limited range) by so designing the tuned circuit that its phase shift with respect to the tone fed directly through tends to cancel even harmonics. The resulting tone is not quite authentic but is improved. Figure 18 shows the pedal registration schematic with its four stons.


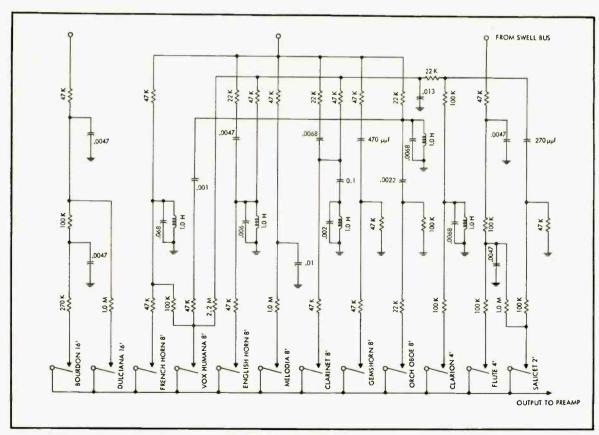


Fig. 17. The swell registration circuit.

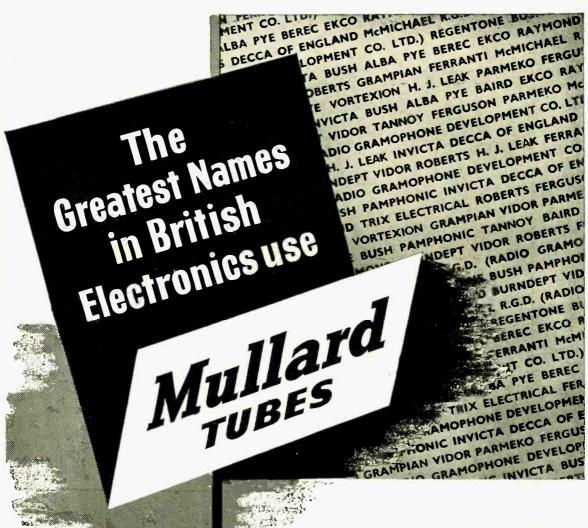

Mullard

Electronic Tubes

used throughout the world

British equipment manufacturers are making a vital contribution to the development of electronics in all fields of application.

Their products are being exported to every corner of the world, earning a universal reputation for advanced techniques and excellent performance.

The majority of these electronic equipment manufacturers consistently use Mullard tubes. This choice is decided upon because they prefer the greater assurance of efficiency and dependability, and because the vast manufacturing resources of the Mullard organisation guarantee ready availability of Mullard tubes wherever they are needed.

Write to the undermentioned distributors for full details of Mullard tubes:—

In the U.S.A. International Electronics Corporation,

Department A-10 81, Spring Street, N. Y. 12, New York, U.S.A.

In Canada Rogers Majestic Electronics Limited,

Department H-B

11-19 Brentcliffe Road, Toronto 17, Ontario, Canada.

MULLARD DYERSEAS LTD., CENTURY HOUSE, SHAFTESBURY AVENUE, LONDON, ENGLAND

Mullard is the Trade Mark of
Mullard Ltd., and is registered in most of the principal countries of the world.



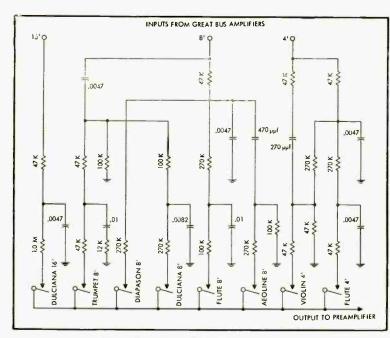


Fig. 16. Tone filters and tab switches for the great.

The preamplifier, also located on the tablet board, is diagrammed in Fig. 19. Outputs from the swell and great registration sections go to the grid of the first tube. The pedal output passes through a "balancing" section so that the pedal level can be adjusted for any set of auditorium conditions with respect to the manual levels. This first triode has feedback around it. Volume of the organ is controlled between the first two stages by a swell-shoe control which varies the impedance of the shunt leg by a voltage divider, being compensated for loudness by the capacitor network which raises the comparative level of the bass as volume decreases. A brilliance control in the plate circuit of the second stage is simply an old-fashioned tone control. The third stage is a cathode-coupled phase splitter and the preamplifier output stage is push-pull with feedback around each half. The "chimes" input is to be used with any of the commercial electronic chime devices, most of which consist of struck bars whose vibrations are picked up electrically and amplified.

Figure 20 is a schematic of the amplifier and supply sections. The amplifier, rated at 15 watts output, consists of a pair of 6L6's with cathode feedback from

(Continued on page 73)

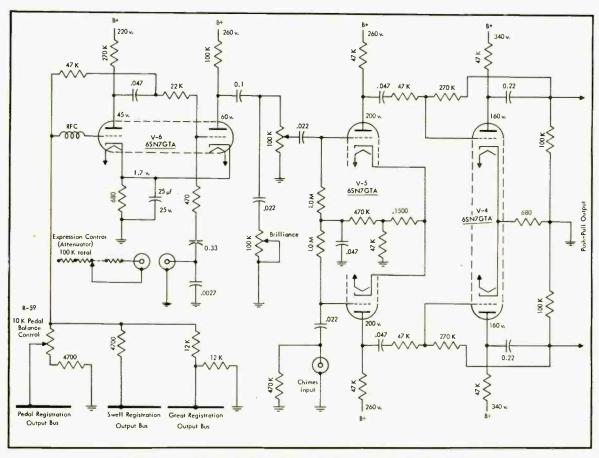


Fig. 19. The preamplifier circuit, with swell-shoe and brilliance controls and push-pull output.



Unique Relationships

NORMAN H. CROWHURST*

Sugar-coated only slightly, but basic audio engineering mathematics which facilitates determining phase shift when attenuation is known, and vice versa.

HE WRITING of this kind of article presents somewhat of a problem. If all the mathematics necessary to prove the various statements made are put into the article, the reader who would really benefit from the article would probably shy away from it after one look at the formulas scattered around. On the other hand, if the mathematical proof is not furnished, the article will lead to endless controversy among the people who require rigid mathematical proof before they will believe anything. To try and overcome this difficulty, the discussion is presented first and the necessary mathematical formulas are reserved to the end of the article. This will serve two purposes: it will avoid frightening the reader who would not understand the mathematics anyway away from reading the article at all; and it will also serve to force the writer into expressing himself without being entirely dependent upon the mathematics, which would make his presentation incomprehensible to the reader who cannot follow the mathemat-

Let us start by being a little historical. In the early days of amplifier design, before Doctor Bode and various other people wrote on the subject, the question of mathematical prediction of circuit behavior was regarded as being so compli-

* 150-46 18th Ave., Whitestone 57, N. Y.

cated that even the best mathematicians would leave it alone, and so amplifiers were designed on the principle of trial and error. Later on amplifiers were required for such specialized purposes that a degree of perfection became necessary that could not be achieved by trial and error methods. This situation gave rise to the approaches adopted by the mathematical geniuses.

In view of the fact that the mathematical approach was recognized to be extremely difficult, it was only natural that the professors of mathematics, to encourage others to follow along and make use of the techniques that they had developed, should stress the simplification which their various approaches introduced to the problem. It is true, of course, that each new method of attack did provide some advantages which simplified the approach to certain aspects of the design problem. The more mathematically inclined readers of this literature would probably correctly assess the degree of simplification achieved and also the exact sphere of application, but for the majority of readers who found the formulas presented to be slightly over their heads, these articles have proved to be somewhat misleading.

Reading between the formulas it appeared that various simplifications were achieved, but because the formula was not thoroughly understood, the sphere


of application of each simplification was not correctly assessed. The most prominent example of this concerns the principle that there exists a unique relationship between the attenuation response, the phase response and the mathematical representations of the combined response by the more advanced complex *p* plane, with poles and zeros, etc.

Most readers understand the idea of an attenuation response, because this is something that can readily be plotted out, by applying a constant input, changing the frequency, and measuring the output. Phase response is not difficult to comprehend either, because this can be shown on the oscilloscope by means of an ellipse which compares the output voltage and phase with the input voltage. But, when the mathematician dives off into his presentation on a complex p plane, and tells the reader that left and right of the vertical axis correspond with active and passive circuits, and above and below the horizontal axis are conjugate pairs corresponding to real frequencies, most readers are quite lost. The various quadrants of this diagram mean nothing to him in relation to a tangible frequency

It is still true, of course, that a particular pattern of poles and zeros, plotted on such a complex p plane, have a unique relationship with the attenuation and phase characteristics which it represents, but this does not help the reader very much to see how he can apply the unique relationship. So the only thing that our readers have gleaned is that their exists such a unique relationship. This *should* be very useful. And the average teacher, being of an inventive turn of mind, and wanting to apply information to his own advantage, tries to find some other way to use this unique relationship, that does not involve the complex p plane, which he completely fails to understand.

Unit Slope

Next we come to the concept of unit slope, which also has been introduced with the necessary mathematics. The general idea of unit slope is built around the fact that a single reactance, contributing to a roll-off characteristic, produces an ultimate slope of 6 db per octave. A further reactance will modify the shape of the roll-off and ultimately produce a slope of 12 db per octave so each 6 db per octave of slope is considered a "unit" slope, Associated with each unit slope is a characteristic phase shift of 90 deg. because the single-unit reactance roll-off produces an ultimate slope of 6 db per octave and an ultimate phase shift of 90 deg.



NORMALIZED FREQUENCY 1/6 OR 6/1

Fig. 1. Family of attenuation characteristics for two-reactance roll off circuits.

30

40



Inside and out ... PRESTO makes the best!

An inside view of the heart of the Pirouette turntable...a single movable plate on which 3 idler wheels are mounted. A flick of the control lever automatically engages the proper idler for the desired speed, eliminating excessive wear on idlers. This mechanism is made wear on idlers. In sincertains its finding the present quality way... throughout. The name presto is always your assurance of the finest in parts... the greatest care in production... Presto never cuts a corner on quality!

The most advanced turntable for professional use!

THE PRESTO

Sirouette

streamlined, compact, trouble-free...featuring the revolutionary flick shift ...one sideway flick selects any speed...331/3, 45, 78 rpm

The turntable of the future is here today ... in the PRESTO Pirouette ... a marvel of brilliant engineering, precise balance and simplicity. Three idler wheels are mounted on a single movable plate. A sideway flick of the control lever automat-

ically engages the proper idler! Trouble-making arms and shift cams are eliminated, idler wheel wear substantially reduced, trouble-free performance is assured. These PRESTO quality features assure topnotch performance all the way:

 Finest turntable motor • Extra heavy-weight, wide-bevel aluminum table Precision deep-well bearing
 Presto quality-engineered throughout A beautiful 12" turntable in smart telephone black with brushed chrome accents. \$53.50.



PRESTO SR-27 TAPE RECORDER value of a lifetime

You get top value in this superb PRESTO tape recorder. 3-motor drive ... separate record, erase and playback heads ... fast forward and rewind. No take-up reel clutch. No idler pulleys. Top performance, rugged construction, ideal for studio or home recording. Complete with A-920 amplifier unit (pre-amp, equalizer and 10 watt amplifier) only \$588.

Send this coupon for more information



PRESTO PIROUETTE T-18-H Turntable

The revolutionary T-18

model with hysteresis motor.

PRESTO PIROUETTE

16" version of the stream-

lined T-18 . . . heavy-duty

PRESTO PIROUETTE T-68-H Turntable

The 16" streamlined turn-

table with hysteresis motor.

\$79.50

T-68 Turntable

wonder.

RECORDING CORPORATION

PARAMUS, NEW JERSEY

Export Division: Canadian Division: 25 Warren Street, New York 7, N.Y. Instantaneous Recording Service, 42 Lombard Street, Toronto

WORLD'S LARGEST MANUFACTURER OF PRECISION RECORDING EQUIPMENT AND DISCS

PRESTO RECORDING CORP. Dept. A-10 PARAMUS, NEW JERSEY

Rush catalog sheets on PRESTO Pirouette turntables, SR-27 tape recorder and advise name of nearest PRESTO distributor.

Name. Company...

With these general ideas mulling around, the reader with insufficient mathematical backround tries to apply the information, on the assumption that there is some inherent relationship between the slope of the attenuation characteristic at any point and the phase characteristic at this point. This misconception is natural enough, arising out of inaccurate knowledge and an over-simplification of the various presentations available. The purpose of this article is to help readers who have been unintentionally led up this particlular garden to see that it is not really quite as simple as this, so that they do not fall into some of the pitfalls that arise from this over-simplification.

Starting with a single reactance rolloff, either at the low- or high-frequency end, the relationship between the attenuation characteristic and phase characteristic is always completely unique. The 3-db point corresponds with the phase shift of 45 deg. and every other attenuation point corresponds with its own unique value of phase shift. So, by normalizing frequency to a reference point of 3 db or 45 deg., a single pair of curves represents every possible response of this type.

Turn now to the case of roll-offs for which two reactances are responsible, either in successive stages of an amplifier, or in a single coupling circuit where there is inductance as well as capacitance, or where feedback may produce a similar interaction between successive stages to that occurring between inductance and capacitance. Here a whole family of characteristics is possible. This family of characteristics, referred to the most useful normalization frequency, is shown in Figs. 1 and 2.

This normalization frequency is the only point at which there is a unique relationship between attenuation characteristic and phase response for the two reactance combination. The point of 6-db-per-octave slope on the attenuation characteristic always corresponds with

Apart from this there are other unique features about the individual characteristic-for example, there is an upward maximum slepe and a downward maximum slope in the case where a peak exists. These points are spaced apart so that the 6 db per octave slope point is a mean between them. The frequency of peak and the frequency where the attenuation response recrosses the zero level are always related to one another by the ratio $\sqrt{2}$. If the peak frequency—or where there is no peak, a corresponding imaginary transition frequency-is used as the normalizing reference frequency, the attenuation response can be given in universalized form, with a sliding scale, modified, for db reference. For any particular pair of attenuation and phase responses, there is a unique relationship between this normalizing frequency and the one used for the responses illustrated in Figs. 1 and 2.

Any particular shape of attenuation characteristic always corresponds uniquely with a particular phase response in the family.

Now we proceed to circuits employing three or more reactances to produce the roll-off at one end of the frequency response. The mathematics for the three reactance case, given in the appendix to this article, show that there is no longer any particularly unique reference be-tween phase and attenuation. As already stated any completely specified attenuation response will have a unique corresponding phase response, but there is no simple means for determining one from the other by a simple two reference system, as was the case with the two-reactance roll-off. One might expect the 90deg. and 180-deg. points to correspond with the 6- and 12-db-per-octave slope points, but they do not necessarily, in fact it would be a very special case where this occurred.

The performance of a network can be completely specified in a number of ways.

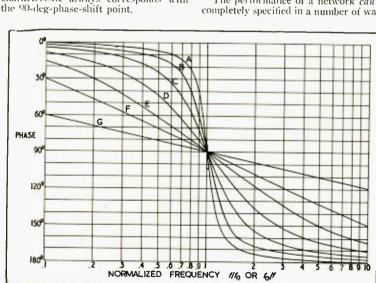


Fig. 2. Family of phase characteristics corresponding with the attenuation characteristics of Fig. 1.

and there are unique relationships between any complete specification and any other.

The statement of what constitutes a complete specification seems to have been left rather vague in earlier literature on the subject. One reason why mathematicians prefer the specifications on the complex p plane is because this is easier to comprehend from this viewpoint of the complete specification than the at-tenuation or phase characteristics. But it is not too easy to see immediately from such a presentation what the attenuation and the phase characteristics will look

The coefficients of the various order terms in the equation for frequency response can also be a basis for complete specification of the characteristic, as will appear from the Eqs. (1), (4), and (12) in the appendix. It is possible to analyze these formulas in much greater detail than is given here, where only enough has been given to illustrate the purpose of this article.

To completely specify a characteristic, it is necessary to know something corresponding to

(a) the number of reactance elements involved to produce the response and

(b) the relationship between the various reactances.

There is a variety of ways of specifying this, such as the complex p plane or the complete response equations of the form given in the appendix. But to know the unique relationship between attenuation and phase characteristic, it is necessary to have something corresponding with the whole expression.

On this basis it is hypothetically possible, given the complete attenuation characteristic from zero to infinity, to compute the complete phase characteristic from zero to infinity, or vice versa. but it is not possible, except in the simplest of characteristics, to compute one response from the other, given only a few points and the slope or attenuation at these points.

APPENDIX

Using x to stand for f/f_0 , where f_0 is the normalizing frequency for a high-frequency roll-off, or for f_o/f , where f_o is the normalizing frequency for a low-frequency roll-off, the complex attenuation factor for a singlereactance roll-off can be expressed:

$$A = 1 + jx \tag{1}$$

From this we can derive the attenuation

$$db_{att} = 10 \log_{10} (1 + x^{\epsilon})$$
 (2)

and the phase response,

$$\varphi = \tan^{-1} x \tag{3}$$

Where two reactances contribute to a roll-off, the complex attenuation factor can be generalized,

$$A = 1 - x^{t} + jax \tag{4}$$

From this we can derive the attenuation response,

 $db_{att} = 10 \log_{10} \left[1 + (a^2 - 2) x^2 + x^4 \right]$ (5) and the phase response

$$\varphi = \tan^{-1} \frac{ax}{1 - x^2} \tag{6}$$

(Continued on page 106)

AUDIO • OCTOBER, 1955

New General Electric Components Insure Best Performance At Three "Critical Quality" Check Points

AT THE RECORD...AT THE STYLUS...AT THE TONE ARM

Here are three new ways to improve the "Critical Quality" of your hi-fi system—by as much as 25%. These new General Electric Ili-Fi components improve your record quality, tone arm balance, and cartridge and stylus fidelity.


Insure a perfect performance from every selection

you play. Enjoy all the lilting highs and bass erescendos you strive to obtain in high fidelity listening. *Insist* on General Electric High Fidelity components. See, but most important, *listen*, to these "Critical Quality" G-E Hi-Fi components at your nearest General Electric Hi-Fi salon.

AT THE RECORD ...

The G-E 3-Way Record Filter—three filter controls suppress turntable rumble and vibration, reduce record scratch and high frequency distortion, provide complete sixposition compensator selection. Regain brilliance from even your oldest recordings.



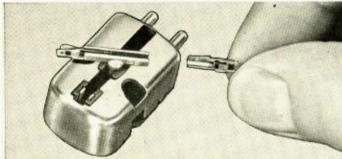


AT THE STYLUS ...

G-E Clip-In-Tip Variable Reluctance Cartridge—Exclusive G-E Clip-In-Tip makes stylus changes effortless. Protects recordings, faithfully reproduces a full range of sound. Here's the same cartridge and styli used by virtually all professional broadcasters. Insist on the genuine G-E.

AT THE TONE ARM ...

G-E Al-500 Baton Tone Arm—for a new emphasis on pickup balance with no perceptible torsional resonance. Ideal response from 20 cycles up—tone arm bass distortion disappears. Your assurance of even stylus wear—longer record collection "life."

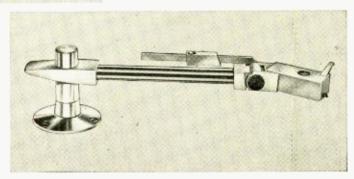

New Free Booklet. For more information about high fidelity and G-E Hi-Fi components see your hi-fi dealer. or write: General Electric Co., Radio & TV Dept., Section R44105, Electronics Park, Syracuse, N. Y.

Progress Is Our Most Important Product

GENERAL ELECTRIC

High-Gain Transistor Amplifier

JAMES J. DAVIDSON*

The author describes the preamplifier section of one of the first commercial radio-phonograph combinations to employ a transistor for this purpose.


N ASPECT OF THE TRANSISTOR Often overlooked in its application is the tremendous voltage gain available when the unit operates into a high impedance. The design engineer often considers the use of tubes exclusively, or transistors exclusively, with little thought toward the advantages to be gained by using both units as com-

Transistor art and economics have advanced to the point where transistors should seriously be considered in lowlevel applications where the input loading is not a serious drawback. The transistor appears inherently capable of a lower noise factor than vacuum tubes. This is due to the absence of microphonics and the complete elimination of heater problems. In combination with a voltage gain of the order of 1000 to 1500 times over the complete audio-frequency range, the transistor offers wide possibilities in such low-level applications as dynamic microphones and phonograph pickups.

The Basic Circuit

A very simple and basic circuit which will demonstrate the advantages and disadvantages of high-gain transistor amplifiers is shown in Fig. 1. The circuit diagram is presented in a simple straightforward manner solely for the purpose of illustrating the fundamental considerations of the high-gain amplifier. Therefore, no attempt is made to compensate for temperature effects which severely alter the behavior of the transistor in this circuit unless the ambient temperature is kept within the range of 20° to 25° C. The subject of compensation will be treated subsequently.

*Engineering Department, RCA Victor Radio and "Victrola" Division, Camden,



Slow in gaining a foothold in high-quality audio applications, the transistor is certain to find its niche in this field. As shown by this author, lower noise levels and higher gain can be achieved. Articles on uses of transistors in amplifiers and test equipment will be welcomed, particularly where the uses are in keeping with the requirements for hi-fi reproduction.

In terms of familiar vacuum tube parameters, the most startling difference between tubes and transistors is in the range of transconductance. While the customary values of tube transconductances lie in the range of 3000 to 8000 micromhos, with special types of tubes going as high as 11,000, ordinary transistors exhibit characteristic values in




Fig. 1. The basic high-gain transistor amplifier.

the range of 30,000 to 40,000 micromhos. This remarkable property, in combination with an output impedance of the order of 100,000 ohms yields unusual audio-voltage-gain figures. For example, ohms, a gm of .03 mho, and a load resistance of 100,000 ohms, the gain

assuming an output impedance of 100,000

$$K = g_m \frac{(R_{\circ}R_L)}{(R_{\circ} + R_L)} = .03 (50,000) = 1500$$

The measured gain of Fig. 1 is 1300, and is down 3 db at 23 kc. The input impedance is 2000 ohms.

Distortion Comparisons

In most applications, the linearity of the stage is an important factor. For small input signals, the input characteristic offers no trouble, but, unfortunately, the same cannot be said for the output. Figure 2 shows a family of collector curves for 3 microamp increments in base current. The slope of each line represents the dynamic output impedance of the unit, as the bias is varied. As is clearly indicated, the impedance decreases from 200,000 ohms to about 60,-000 olims as the base current increases from 0 microamps to 24 microamps. Although impedance variations resulting from collector current changes do contribute to distortion, the problem is not serious in most cases. When the load impedance is small, such as that presented by another transistor, an output impedance as low as 60,000 ohms will be negligible compared to the load impedance of 2000 olims or less. When the load impedance is high, the collector-current swing is quite limited. This reduces the impedance swing to a very small value, as indicated by the 100,000 ohms load line in Fig. 2. In any case, this form of distortion is comparable with the nonlinearities found in vacuum tubes.

Another, and far more serious source of distortion, is indicated in Fig. 3, and







Fig. 3. Collector curve family extended to higher voltages to show possibility of distortion due to bending of curves.









Features brand new circuit and physical design. Matches WA-P2 Preamplifier. Modern tube line-up provides better than 10 uv. sensitivity for 20 db of quieting. Built-in

oscillator—illuminated tuning dial—pre-aligned IF and ratio transformers and front end tuning unit. Uses (BQ7A Cascode RF stage, 6U8 oscillator—mixer, two 6CB6 IF amplifiers, 6AL5 ratio detector, 6C4 audio amplifier, and 6X4 rectifier.

Heathkit 25-Watt HIGH FIDELITY AMPLIFIER KIT

Features a new-design Peerless output transformer and KT66 output tubes. Frequency re-ponse within ±1 db from 5 cps to 160 Kc at 1 watt. Harmonic distortion only 1% at 25 watts, 20-20,000 cps. 1M distortion only 1% at 20 watts. 4, 8, or 16 ohms output. Hum and noise, 99 db below rated output. Uses 2-12AUT's. 2-KT66's and 5H4GY. Attractive physical appearance harmonizes with WA-P2 Preamplifier. Kit combinations:

W 5M AMPLIFIER KIT: Consists of main amplifier and power supply, all on one chas-sis Shpg. Wt. 31 Lbs. Express \$5975

W-5 COMBINATION AMPLIFIER KIT: Consists of W-5M amplifier kit plus Heathkit Model WA-P2 Preamplifier kit. Shpg. \$7950 wt. 38 Lbs. Express only.

Heathkit HIGH FIDELITY PREAMPLIFIER KIT

Designed specifically for use with the Williamson Type Amplifiers, the WA-P2 features 5 suparate switch-selected input channels, each with its own input control—full record equalization with turnover and rolloff controls—separate bass and trellet one controls—and many other desirable features. Frequency response is within ±1 db from 25 to 30,000 cps. Beautiful satingold finish. Power requirements from the Heathkit Williamson Type Amplifier.

4 Heathkit Williamson Type HIGH FIDELITY AMPLIFIER KIT

This amplifier employs the famous Acrosound TO-300 "Ultra Linear" output transformer, and has a frequency response within ± 1 db from 6 cps to 150 Kc at 1 watt. Harmonic distortion only 1% at 21 watts. IM distortion at 20 watts only 1.3%. Power output 20 watts. 4, 8, or 16 ohms output. Hum and noise, 88 db below 20 watts. Uses 2-6SN7's. 2-5881's and 5V4G. Kit combinations:

W-3M AMPLIFIER KIT: Consists of main amplifier and power supply for separate chassis construction. Shpg. Wt. 29 lbs. \$4975. Express only.

W-3 COMBINATION AMPLIFIER KIT: Consists of W-3M amplifier kit plus Heathkit Model WA-P2 Preamplifier kit. Shpg. \$6950. Wt. 37 lbs. Express only.

Heathkit Williamson Type HIGH FIDELITY AMPLIFIER KIT

This is the lowest price Williamson type amplifier ever offered in kit form, and yet it retains all the usual Williamson features. Employs Chicago output transformer. Frequency response, within ±1 db from 10 cps to 100 Kc at 1 watt. Harmonic distortion only 1.5% at 20 watts. IM distortion at rated output 2.7%. Power output 20 watts. 4, 8 or 16 ohms output. Hum and noise, 95 db below 20 watts, uses 2-6SN7's, 2-5881's, and 5V4G. An exceptional dollar value by any standard. Kit combinations:

W-4AM AMPLIFIER KIT: Consists of main amplifier and power supply for single chassis construction. Shpg. Wt. 28 lbs. Express \$3975 only

W-4A COMBINATION AMPLIFIER KIT: Consists of W-4AM amplifier kit plus Heathkit Model WA-P2 Preamplifier kit. Shpg. \$595. Wt. 35 lbs. Express only.

Heathkit 20-Watt HIGH FIDELITY AMPLIFIER KIT

This model represents the least expensive route to high fidelity performance. Frequency response is ±1 db from 20-20,000 cps. Features full 20 watt output using push-pull 6L6: and has separate bass and treble tone controls. Freamplifier and separate bass and treble tone controls provided. Employs miniature tube types for low hum and noise. Excellent for home or PA applications.

Ø 000000

Heathhit construction manuals are full of big. clear pictorial diagrams that show the placement of each feed and part in the circuit. In addition, the step-by-step procedure describes each phase of the construction very carefullty, and supplies all the information you need to assemble the kit property. Includes information on resistor color-codes, tips on soldering, and information on the tools you need, Even a beginner can build high quality Heathkits and enjoy their wonderful performance

HEATH COMPANY

6

6

The World's

Finest Electronic Equipment in Kit Form

A Subsidiary of Daystrom Inc.

BENTON HARBOR 25,

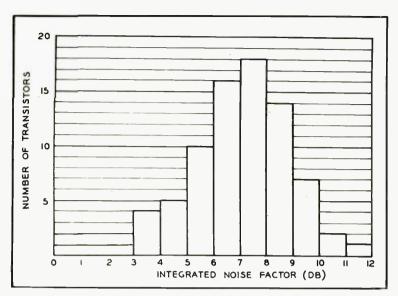


Fig. 4. Representative production spread of noise factor for RCA type 2N104 transistor. Chart represents total of 77 units.

is peculiar to the transistor as a device. and the application in particular. When dealing with gains of 1000 and above, it is desirable to maintain an appreciable signal-handling capacity. For example, a 15 millivolt rms input signal, when amplified 1000 times, requires a 42.5 volt peak-to-peak output swing. In order to accommodate this swing, the collector quiescent voltage must be above 20 volts. As indicated in Fig. 3, the transistor begins to break down in the region of 30 to 40 volts, with resultant bending of the output characteristics. This bending will contribute the major share of distortion to an amplifier operating over voltage swings of 40 volts. Quantitatively, a unit, operating at 20 volts, 1 milliamp, into a load of 100,000 ohms, and handling an a.c. output of 39 volts peak-to-peak, will generate about 3 per cent total harmonic distortion.

Noise Considerations

With the input limited to 10 to 15 millivolts maximum, the next consideration is the minimum usable input, or noise level. In the matter of noise, transistors, within a very few years, have established




Fig. 5. Schematic of temperature-stabilized high-gain amplifier.

their superiority over vacuum tubes. The RCA type 2N104 transistor is a controlled-noise unit with a maximum Noise Factor of 12 db. A representative spread of Noise Factors is shown in Fig. 4, which indicates that an average unit will run about 7 db. The optimum source impedance for noise considerations is about 500 olms, ¹ at which value the units were measured. Assuming this value and substituting in the noise equation

$$E_{soise} = \sqrt{4KTR(f_t - f_t)}$$
Where $K = 1.374 \times 10^{-23}$ Joule/degree Kelvin (Boltzmann's constant)
$$T = 300^{\circ} \text{ Kelvin}$$
 $R = 500 \text{ ohms}$

$$f_t = 23.000 \text{ cps}$$

$$f_t \cong 0$$

⁴ P. M. Bargallini and M. B. Herscher, "Investigations of noise in audio amplifiers using junction transistors," *Proc. IRE*, p. 217, Feb. 1955.




Fig. 6. Inverted amplifier with the same characteristics as the amplifier of Fig. 5, but adaptable to conventional negative-ground power supply.

the generator noise is 0.436 microvolt. A 2N 104 transistor having a Noise Factor of 12 db, has an equivalent noise input of 1.69 microvolts.

If an average unit with a 7 db Noise Factor is chosen, the input can be as low as 0.872 microvolt for unity signal-tonoise ratio. For an average unit, therefore the input may range from 1 microvolt to 10 millivolts, a range of 80 db.

Temperature Stability

Having established the basic operating parameters of the circuit in Fig. 1, attention is next devoted to developing a circuit which will eliminate the gross temperature dependence. Because of the wide collector swings, it is desirable to stabilize the operating point as firmly as possible. This can be done by utilizing a combination of several stabilizing schemes, all of which are known to the art. Figure 5 shows a completed circuit which combines three methods; currentvoltage bias, constant emitter-current stabilization, and d.c. feedback. With the circuit constants shown, the stability, factor, Sr-defined as the change in collector current, Ic, for a given change in cutoff current Ico-is equal to alc/Ico, or 1.37. This means that the change in I_{co} (which is unavoidable when the junction temperature changes) is multiplied only by 1.37 as a change in collector current, rather than by β (40 or 50), as in Fig. 1. In this way, the collector voltage is held quite constant, varying from -22 volts at -79° C (dry ice temperature) to -17 volts at 65° C.

In addition to excellent temperature stability, the gain is quite independent of transistor parameter variations, changing only ±1 db from its normal gain of 60 db. This proves to be true with nearly any transistor in good working condition.

A disadvantage of using d.c. feedback (as established by $R_{\rm f}$) arises from the presence of a.c., which is also fed back. In this case, the amount of degeneration is determined by the generator impedance, across which the feedback voltage is developed. For the case of resistive source of 500 ohms, the voltage division is in the ratio of 100,000 to 500, or 200 to 1. Therefore, the gain of 1000 without feedback is reduced by 15.5 db. The situ-




Fig. 7, High-gain phonograph preamplifier as used in RCA models 6HF1 and 6HF2.

AUDIO • OCTOBER, 1955



THE ANSWER TO ALL IS P'S'E

Yes-the answer to all is P.S.E

Think of it—now you can buy a speaker and never worry about it becoming obsolete . . . now you can improve your present speaker or system without discarding what you have.

P-S-E (University's Progressive Speaker Expansion plan) is the most revolutionary concept in speaker history.

Here's how P.S.E works:

University speaker components, enclosures and networks have been so uniquely designed that it is possible to start an excellent basic system, at low cost, and add to it later—while enjoying immediate listening satisfaction.

P.S.E makes it possible to build up to a great variety of magnificent sounding systems in successive, inexpensive stages regardless of budget or space limitations.

A complete selection of speakers and components enables you to build (or have assembled for you) a personalized system, to suit *your* musical taste or hearing requirements.

In short P.S.E is a "MASTER BLUEPRINT" for the expansion of a speaker system to its fullest potential.

You owe it to yourself to learn what **P·S·E** can do for you; how it can solve your speaker problems—forever.

Simplified, easy to follow instructions called TECHNIGRAMS are available free. Fill out and mail coupon immediately for further information.



University LOUDSPEAKERS, INC.

80 South Kensico Avenue, White Plains., N. Y.



A few of the many TECHNIGRAMS available FREE to fit your specific requirements.

University Loudspeake BO South Kensico Ave.	, White Plains, N. Y.
Please send me furth	ner details.
I have a speaker	
I'd like to start	
	simple system and build.
I have a system !	
I ductors build es	
☐ I custom-build sy	ystems for resale.
☐ I custom·build sy	ystems for resale.
	ystems for resale.
	ystems for resale.




Fig. 8. Phonograph preamplifier with complete compensation for the RIAA recording characteristic.

easiest way to solve the problem is by the use of feedback. In this case, with a gain of 1000, and a division between R_s and R_s of 100,000 to 100, the gain is cut of db. Additionally, the feedback reduces of 250 microthe total harmonic distortion for each

ation can be avoided by splitting R_i and inserting a bypass to ground.

Voltage Supply

Since the most logical use of the circuit of Fig. 5 will be to feed a vacuum tube grid, the use of negative 250 volt supply is a practical handicap. In order to utilize the positive supply already available where tubes are present, the ground point may simply be shifted, as indicated in Fig. 6. The new circuit is identical to that in Fig. 5, except that it now utilizes a positive supply, and the input is floating at 25 volts above ground, necessitating the use of a twowire shielded cable input. The only new consideration is the capacitance to ground of the source, which can be a problem in the case of a.c. operated oscillators and signal generators. It is of less significance in applications utilizing phonograph pickups, microphones, or other such transducers.

Final Phonograph Preamplifier Circuit

With the modifications shown in Fig. 7, this circuit is in current production as a phonograph preamplifier in two RCA "high fidelity" consoles, models 6HF1 and 6HF2. The pickup is of the movingcoil dynamic type, having excellent frequency response and very low distortion. Its average level output is on the order of 1 millivolt, and its impedance is less than 2 ohms. Because of the unusually low output voltage, when the pickup is used with tube preamplifiers, noise becomes a severe problem. Normally, an input transformer is required to overcome it. With the transistor, on the other hand, the noise level is 55 to 60 db below average level, which is completely satisfactory.

The circuit of Fig. 7 was designed with this type pickup in mind. R_s was inserted to introduce controlled degeneration. Since the absolute peak recording level of modern microgroove records is 26 db above average level, the maximum output from the pickup will be 26 db above 1 millivolt, or 20 millivolts rms. As ontlined previously, the preamplifier cannot handle inputs as high as this, and the

easiest way to solve the problem is by the use of feedback. In this case, with a and R_0 of 100,000 to 100, the gain is cut 6 db. Additionally, the feedback reduces the total harmonic distortion for peak level (20 millivolts) input to less than 2 per cent and extends the frequency response to 38 kc. Rs is only effective, however, because of the very low impedance of the pickup. Normally, it is impractical to use feedback on the input circuit, since variations of the source impedance with frequency would upset the loop. Where the source impedance is negligible in comparison with 100 ohms, however, this scheme makes it possible to control the degeneration fully.

Fig. 9. Transistor is

almost lost among the "massive" other

components.

Since the input is already floating, it is desirable to connect one side directly to the emitter, rather than the junction of R_i and R_i . This removes R_i as a source of a.c. degeneration, eliminating the need for a bypass capacitor, while retaining its very valuable function of temperature stabilization. Capacitor C_i is placed in the emitter lead for protection of the pickup. If it were in the base lead, in series with R_i , and the pickup became shorted to ground, somewhat more than 1 ma would flow through the pickup. Placing the capacitor in the emitter lead effectively ties the base to the collector when

there is a short, making the transistor just a forward-biased diode. Therefore, most of the current is shunted through the transistor, and a negligible current of 250 microamps flows into the pickup.

Figure 8 shows the phonograph preamplifier with the addition of frequency selective feedback to compensate for the RIAA/NARTB recording characteristic. Because of the large amount of lowfrequency equalization necessary, the gain at 1000 cps is reduced to 44 times, and the distortion is reduced correspondingly, to a few tenths of a per cent. Since the signal is "flat" however, only one succeeding stage of amplification is necessary to bring the signal up to the two-volt level required by many power amplifiers. Figure 9 shows the transistor in place in the 6HF1 chassis, and Fig. 10 shows the complete circuit of the preamp to indicate the four types of equalization.

Conclusion

Transistors, when operated as low-level, high-gain amplifiers, offer distinct advantages over tubes from a noise standpoint. When it is considered that at least two, and usually more, tube stages are required to produce comparable gain figures, the transistor is also in a favorable competitive position from the stand-point of economy.


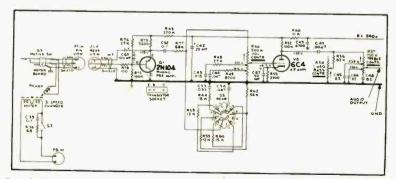


Fig. 10. Portion of schematic of RCA 6HF1 to show four phono equalization curves. Switch Sits shown in position 1, RIAA. Clockwise rotation through positions 2, 3, and 4 give LP, AES, and 78 curves, respectively.

First Announcement.

New Sonotone "3" Series SUPER-FIDELITY Ceramic Cartridges

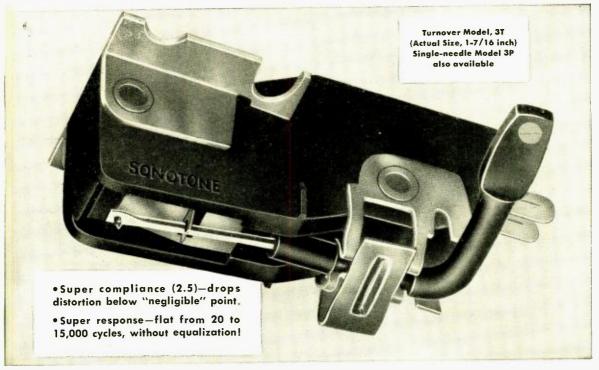

PARDON US IF WE CALL THEM "REVOLUTIONARY"...

but these new cartridges obsolete pre-amplifiers, equalizers, and old-style pickups!

If you've followed the development of ceramic cartridges since Sonotone pioneered them in 1946, you know we've made enormous advances.

Recently Sonotone has offered ceramic cartridges equal, by test, to most velocity types. Now, Sonotone presents the "3" Series, which set utterly new standards of finest performance, by all the measurements engineers know how to make. And your ears will confirm their findings.

But that's not all the story. The performance of these new cartridges makes the *inherent* advantages of the ceramic type loom larger than ever. Consider:

WHY A PRE-AMP?

There is only one reason for a pre-amplifier—a velocity pickup puts out too feeble a voltage to drive your amplifier directly. But these Sonotone "3" Series cartridges deliver a whopping 0.5 volts—roughly 50 times as much as most velocity types. So you can eliminate the circuitry, noise, space and expense a pre-amp involves. (If you now have a pre-amp, our simple adaptor permits im-

mediate use of Sonotone "3" Series cartridges in your present system.)

WHY EQUALIZE?

Velocity type cartridges play back the various recording curves far from flat. So you need equalization for acceptable results. This means looking up the curve for each record, setting a knob before each play. Sonotone "3" Series cartridges end this nuisance—because ceramics don't respond to velocity, of needle movement, but to amount of movement. Result, they self-equalize—play back all curves so close to flat that the need for an equalizer disappears. Out goes more circuitry!

That still isn't all. These new cartridges eliminate magnetic hum problems. Laugh at heat and humidity. Fit any arm in wide use. Have the easiest of needle replacements. And the cost—?

Single needle model, with diamond, only \$30 LIST. Turnover model with sapphirediamond needles, \$32.50 LIST. Less with sapphires. So even the price is revolutionary, when you're buying the ultimate.

NEW SONOTONE AMPLIFIER

We built this HFA-100 to realize the full excellence of Super-Fidelity ceramics. There's nothing to match this amplifier for beauty—musically and visually. Hum, noise and distortion are virtually unmeasurable—at maximum settings, distortion is only



0.15%! Cabinetry is superb solid walnut or solid mahogany, with solid brushed brass panel. \$117.50 NET. Similar control unit, for use with

power amplifier, \$59 NET.

"Revolutionary" is a big word. But these Sonotone developments are pretty big news, too, we feel. We hope you'll look into them. If you like *music*, here's for you!

SONOTONE®

CORPORATION, ELMSFORD, N. Y.

See, hear these new Sonotone high fide:ity products at the Audio Foir, ROOM 740, Hotel New Yorker, Oct. 13-16.



AMPEX STEREO IS HERE!



This is the most exciting development yet in music listening. You will hear a startling difference in realism. This is stereophony as only a superb tape machine can provide it.

IT'S THE AMPEX 612 TAPE PHONOGRAPH

With Ampex quality it reproduces all types of recorded tapes-half-track, full-track or the exciting two-track stereophonic tapes. The Ampex 612 gives you the fullest listening pleasure from stereophonic tape recorded music in your own living room.

STEREOPHONIC TAPES ARE ALREADY AVAILABLE

Major recording companies for some time have been recording all important sessions stereophonically as well as conventionally. Stereophonic tapes from many of these performances are now on the market, and more are continually being released for your selection.

BE SURE TO HEAR A DEMONSTRATION

You aren't up-to-date in the field of recorded music until you've heard the Ampex 612. Your local Ampex dealer will demonstrate it to you with some of the stereophonic tapes you can buy right now. Call and make a date today.

Prices: \$395 in contemporary furniture cabinet or Samsonite portable case; \$10.00 extra for blonde contemporary: \$379.50 for chassis for custom installation.



\$34 CHARTER STREET . REDWOOD CITY, CALIFORNIA

Distributors in principal cities (see your classified telephone directory under "Recording Equipment") Canadian distribution by Canadian General Electric Company.

THE MINSHALL ORGAN

(From page 60)


the transformer secondary. The power supply is standard, furnishing B-plus and filament voltage to generators and tablet board through connectors as shown. The tablet-board connector also carries preamplifier output to the power amplifier grids and to a pair of sockets into which lines to booster amplifiers may be plugged.


The vibrato oscillator, a 6SN7, is also in the power supply. This is a simple

Fig. 18. Circuits of

the four pedal tone filters.

feedback oscillator the frequency of which can be adjusted over a range of about 5 to 8 cps by switching different resistors across R_{\bullet} . This is done at the tablet board and a line from the cathode for this purpose is carried up through the large connector. Regulated B-plus is applied to the vibrato-oscillator plates (note the VR tubes) and the "vibrated" voltage is carried to the master oscillator plates through the generator plate sup-

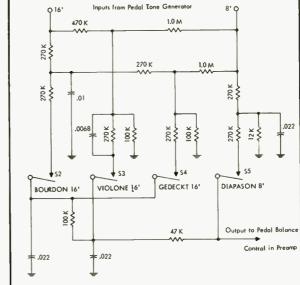

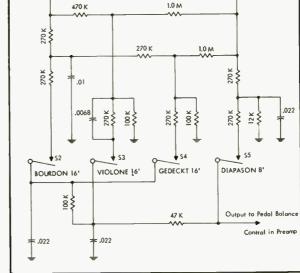

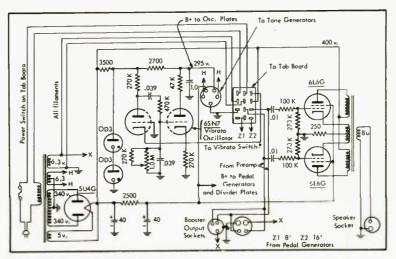


Fig. 20. Schematic diagram of the power amplifier and power supply with vibrato oscillator.

Equipment Report

H. H. Scott 710-A Stroboscopic Turntable—National "Criterion" AM/FM Tuner Acoustic Research AR-1 Loudspeaker System—Harman-Kardon C-300 "Trend" Amplifier

SCOTT TYPE 710-A STROBOSCOPIC TURNTABLE

RADICALLY DIFFERENT TURNTABLE for high-quality music reproduction" might well be offered as subtitle to this unit, for the design is not like any other heretofore offered. Yet after a thorough inspection, one is likely to say, "Why didn't I think of that?"

The Scott turntable is different in many

The Scott turntable is different in many respects. Like some other types, it employs a horizontal motor which drives the turntable through a worm and gear, but there the resemblance ends. The motor—together with the speed change mechanism—is flexibly mounted to the base plate so that a minimum of motor vibration is transmitted either from the motor to the base or from external vibrations to the motor. Drive from the speed-change mechanism to the turntable shaft passes through two extremely flexible rubber couplings, so that practically no motor vibration is transmitted to the record and pickup.

The turntable and the pickup mounting platform are rigidly coupled together with an aluminum casting—a necessity, of course, since no relative movement between them can be permitted—and this assembly is flex-

ibly mounted to the base plate. The antivibration mountings used for both motor and turntable assemblies consist of coil springs with sponge rubber damping washers to eliminate the effect of spring resonance. The springs themselves are wound with a portion of the coil being cylindrical and a portion being conical, further broadening the resonant frequency of the spring mounting. This type of vibration isolation effectively prevents any disturbances from external sources reaching the turntable and arm, and the double isolation between motor and turntable reduces rumble to a minimum.

The selection of speeds is effected by depressing one of three buttons on the base plate. These, in turn, cause an idler to bear against a stepped motor shaft and an aluminum drum, and the latter is connected to the worm gear box through the soft rubber universal joints. Each of the steps on the motor shaft is slightly conical, and the idlers can be moved longitudinally over a small range, such movement being controlled by knobs on the panel. Since the shaft of the motor is conical, the longitudinal movement of the idlers permits a vernier adjustment of speed over a range of ±5 per cent from the nominal value.

Stroboscopic markings on the underside

of the turntable are illuminated by a neon lamp when the motor is running, and can be viewed in a mirror mounted on the base plate. Speed may be adjusted to the exact values readily, or may be changed a small amount to "tune" the record to a musical instrument, for example.

On the debit side, although not of much

On the debit side, although not of much importance to the average user, is the use of an induction motor for the driving power. While these motors are smooth, and in fourpole designs have relatively little external field, they do take from 15 to 30 minutes to "come up to speed." When first turned on they run at approximately 1725 rpm, and after warning up they run at about 1740. Thus for any application where an absolute constancy of speed is required, the hysteresis motor is more suitable, and it does have less intrinsic vibration than the induction type. However, this is of little importance with a mounting of the type used in the Scott turntable, and since it is so very easy to make minor adjustments in turntable speed during the warm-up time, if the absolute speed is important for a particular use.

As described in EQUIPMENT REPORT for March, 1955, it is quite difficult to make valid measurements of rumble without well controlled laboratory conditions. One of the problems is in obtaining a test record in which the rumble is non-existent, since another turntable had to be used in making the original master of an unmodulated track, and its characteristics are unavoidably impressed on the record. However, using the same test records as used previously, and taking as much care as possible in evaluating the results, it appears that the rumble from the Scott turntable is approximately 54 db below a maximum recording level of 20 cm/sec (which Audio considers a practical maximum level, even though many records have been measured at as high as 28 cm/sec stylus velocity). NARTB standards for turntable performance are based on a stylus velocity of 7 cm/sec, but usable signal-to-noise ratio should be related to the maximum recording level likely to be encountered. In any case, rumble is sufficiently low as to be effectively


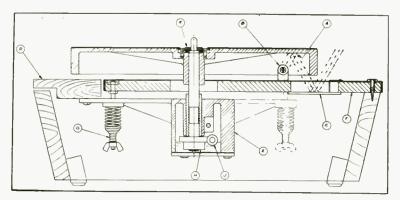


Fig. 1 (below). H. H. Scott's 710-A Stroboscopic turntable. Pickup arm mounts on wooden shelf at rear. Fig. 2 (right). Underside of Scott turntable showing unique construction. Drive mechanism is flexibly mounted to the base plate, and turntable and pickup arm platform—solidly tied together—are also mounted flexibly to base plate. "Universal joints" of soft rubber connect the two elements. Fig. 3 (above).

Cross section of turntable mounting.



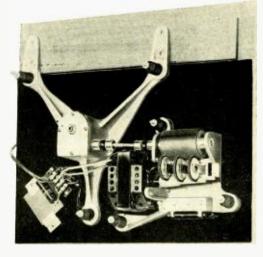

74



Altec Lansing's new and complete line of 27 separate units assures the same matchless Altec quality in every phase of home music systems. Every Altec product is engineered to the most exacting standards and designer-matched with other Altec components for maximum performance.

Altec provides a new standard of smart design, too, in beautifully styled units that complement each other and blend perfectly with any decor, any room style. Truly, Altec offers the finest in High Fidelity equipment. Complete Altec home music systems range in price from \$324 to \$1180.

The group shown above comprises a typical Altec home music system of finest contemporary design and matchless professional performance, complete...\$808.

SPECIFICATIONS AND INDIVIDUAL PRICES ON THE ABOVE EQUIPMENT:

AM-FM TUNER exceptional selectivity, sensitivity and stability...\$186.

A-440A PREAMPLIFIER 5 inputs, 25 crossovers, maximum flexibility ... \$139.

A-340A AMPLIFIER 35 watts, 5 to 100,000 cycles range...\$159.

ICONIC SPEAKER SYSTEM 30 watts, 35 to 22,000 cycles...\$324.

These pieces, with the exception of the A-340A Amplifier, available in blond or mahogany finish.

ALTEC FIDELITY IS HIGHEST FIDELITY



See your ALTEC dealer or write Dept. 10A

9356 Santa Monica Blvd., Beverly Hills, Calif. 161 Sixth Avenue, New York 13, N.Y.

reproducers • loudspeakers • amplifiers • preamplifiers • tuners • enclosures

inaudible through a high-quality loudspeaker system with the amplifier gain set for high levels of reproduction, and then listening to an unmodulated groove. The turntable comes up to speed in approximately one revolution at any speed setting, with only a slight overshoot as speed is reached. Wow and flutter cannot be detected by ear on any speed.

With the entire mechanism isolated completely from the base plate, the Scott turntable is easy to mount into a cabinet, since it may be screwed down firmly without need for any spring or rubber mountings. A capacitor across the a.c. switch eliminates any possibility of pops in the system when the motor is started or stopped. Because of its effective isolation from the mounting board, this unit is particularly suitable for installations that must be made in the same cabinet with a loudspeaker, and no interaction is likely to be encountered. P20

NATIONAL "CRITERION" AM/FM TUNER

One of the most interesting tuners on the hi-fi market these days is the National Criterion, which brings a professional type "system" into the realm of comfortable home usage. About the only practical facility not offered by this deluxe model is the ability to switch right and left channels of a stereophonic program.

The audio enthusiast who is likely to engage in recording occasionally often wants to listen to one program while recording another—he may want to feed one program to a speaker sytem in one part of the house while he feeds another to a second speaker. He may want stereophonic reproduction, or possibly he has developed some device which needs the supersonic control frequency sent

out by many of the "storecasting" FM stations.

Whatever his demands, most of them can be met easily by the Criterion—with its one-half microvolt sensitivity on FM and 10 microvolt sensitivity on AM and its flexibility of operation. In addition, it incorporates automatic gain control in the FM section to prevent overload of the early stages, a "Mutamatic" circuit which effectively silences the receiver between stations (on FM), and a high-speed limiter which employs two cascaded 6BN6's to eliminate the short-impulse interference so often heard on FM receivers.

Because any AM/FM receiver involves a large number of circuits, the block schematic of Fig. 4 is shown to provide a greater understanding of the functioning of this particular model. In particular, the operation of the Mutamatic circuit is of interest, for in most squelch circuits the controlling circuits operate on an audio-amplifier stage with a consequent possibility of being noisy in operation, usually with a thump. In this circuit, however, the control voltage is derived from the input transformer to the first limiter stage, and after rectification is fed to the squelch triode to be amplified sufficiently to control the limiter stage.

Audio Facilities

Note that there are several outputs in this tuner. The Multiplex output is taken from the FM detector circuit ahead of the de-emphasis network, and thus is capable of passing frequencies as high as can be used for modulating the carrier. Future applications of multiplexing—if and when they come—will make it possible to transmit

both channels of a stereophonic program on one FM carrier, or transmit two entirely different programs on the same carrier. At the present time, many FM stations are using the frequencies above audibility to effect a change in gain of the audio cricuits so as to cut out announcements for Muzaktype programming which provides only music, or to increase the volume of announcements for "storecasting."

The FM "Binaural" output is directly connected to the FM circuits without passing through the selector switch and thus may be fed on a permanent basis (if desired) to one channel of the audio system. The Tuner Output is controlled by the selector switch, and is used when the unit is to be connected to a single-channel amplifier-speaker system.

plifier-speaker system.

The AM "Binaural" output is connected directly to the AM circuits without passing through the selector switch, in the same fashion as the FM connection. The Recording Signal Output is provided for a permanent connection to a recorder, and is controlled by the selector switch. Note that no signal is fed to this output when the selector switch is on BINAURAL, and that the Tuner Output is connected to FM on this position of the switch. Cathode followers provide suitably low impedances for all outputs except Recorder.

The partial schematic in Fig. 5 shows the detector of the FM section, as well as the succeeding amplifier and the cathode follower. This detector is of the wide-band type, and simplifies tuning by eliminating the three-point response. Thus the selectivity of the receiver is controlled almost entirely by the i.f. band-pass characteristics,

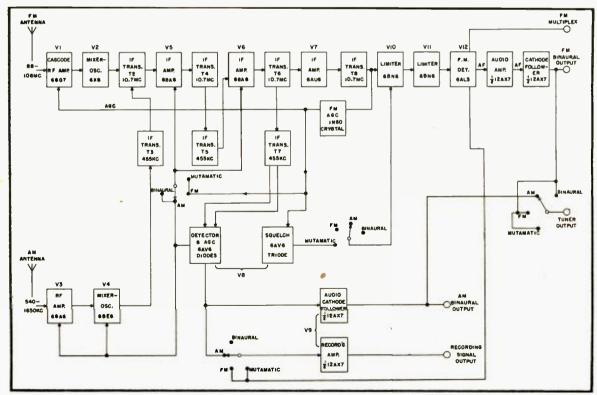


Fig. 4. Block schematic of National "Criterion" AM/FM tuner.

"By far the finest phonograph reproducing instrument we have heard"

THE AUDIO LEAGUE REPORT ON PHONO PICKUPS CONTINUES:

The ESL Professional and Concert series were unquestionably the smoothest, cleanest sounding cartridges tested...

For sheer naturalness and undistorted ease, ESL has no peer...

In A-B comparisons with its closest competitors, even persons who had never previously been exposed to high fidelity reproduction were struck by the supprior definition of the ESL."*

Is your pickup OBSOLete?

Switch to the sensational new ESL electrodynamic cartridge, now at your dealer's. Write for detailed information.



Soloist Series from \$14.95 . Concert Series \$35.95 . Professional Series ath and carridge \$406.50

*Converght 255 by The Audio Leges P.O. Box 5/ Pleasantville, N.Y. Subscription: 12 issues

ILPTURE BY GERALD PARMER

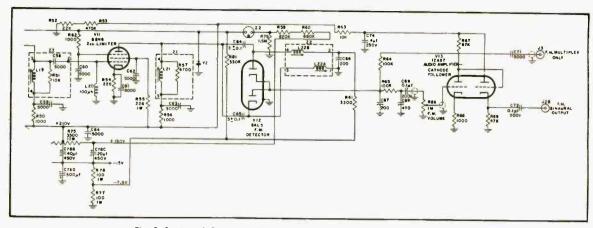


Fig. 5. Section of Criterion schematic to show detector and audio output stages.

and if the signal is heard at all it is heard without distortion. This, together with the Mutamatic feature, makes the receiver easy to tune, and as the dial is scanned, stations drop in and out from a completely silent background.

In the AM section, a band-pass i.f. provides response within ±1 db up to 7000 cps, is comparable to FM quality on programs transmitted over land lines.

In operation, the set is easy to handle, and has sufficient sensitivity for the more

remote installations. From our testing location on Long Island, FM signals are regularly picked up from Philadelphia stations through the many signals from New York City. The capture ratio—the ability of the tuner to eliminate interference from weaker signals on the same channel—is high, and strong stations from adjacent channels have a minimum of effect on weak distant signals.

One advantage of the Criterion is the facility for plugging in the Horizon 5 preamplifier, with phono preamp and tone con-

trols. With this unit, the volume control operates on both of the Binaural outputs simultaneously, so that the relative levels of the two channels can be set by the controls on the tuner, and both can then be controlled simultaneously by the volume control on the Horizon 5.

On the whole, this unit offers a maximum of convenience and flexibility for the most avid experimenter, and combines with it both excellent quality and high sensitivity.

P-21

ACOUSTIC RESEARCH AR-1 LOUDSPEAKER SYSTEM

After its original description in the October, 1954, issue, we have looked forward for an opportunity to "live with" the production model of this system for long enough to evaluate its performance in direct comparison with our "standard" of loudspeaker quality.

Although the AR-I is small in physical size, it should not necessarily he judged with the usual allowances which are made when the enclosure is less than eight cubic feet in volume. Results of measurements on this speaker were shown in Mr. Vill-chur's article in the July, 1955 issue, and the observations contained herein are primarily of a subjective nature.

On first switching from a more conventional type of loudspeaker system, it appears that the AR-1 is slightly deficient in bass (although it does not so measure) but after a few minutes listening the sound takes on a realism that defies description. Switching back and forth at short intervals—five or ten minutes, for example—gives the same impression, but thorough consideration of

the quality brings out the belief that only a minor boost in the over-all low-frequency response is completely adequate to place this system in the category of a true widerange unit.

Efficiency is not as high as with some other models—in direct comparison with other well-known models, the differential is of the order of 3 to 4 db. For listening rooms of conventional living-room size, this is not a disadvantage, but if it were necessary to fill a large hall, for instance, it is doubtful if the output from a typical amplifier of 10 watts would be adequate.

The AR-1 is designed to work from an impedance of 4 ohms, and is at somewhat of a disadvantage when it must be worked from an 8-ohm amplifier, since the speaker works, in effect, with a series resistance of 4 ohms to load the amplifier correctly, and thus dissipates part of the amplifier power without a corresponding acoustic output.

The unit is available in several forms—in furniture cabinets of either blonde or mahogany or in unfinished cabinets with a complete two-way system which comprises the 12-inch woofer and an 8-inch tweeter. The woofer and cabinet—which must be purchased as a unit since the enclosure must be completely airtight and of specific size and acoustic treatment—may be obtained separately in either finished or unfinished form, to be coupled with a high-frequency section of any desired type.

For installations where size is of primary importance, the AR-1 is likely to be considered an excellent choice, since it gives big-speaker performance from a relatively small box. However, it is not necessary to make any concessions to its size when comparing performance.

P-22

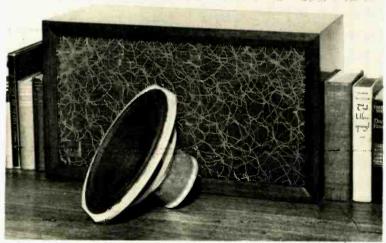


Fig. 6. Acoustic Research AR-1 speaker system, with special type of low-frequency cone-type driver.

New Top Quality KNIGHT Hi-Fi Components



KNIGHT Custom Hi-Fi components are built to ALLIED's own special high standards. They incorporate the most advanced circuit designs and the very best of materials and craftsmanship to deliver outstanding per-

formance plus distinguished styling at very moderate cost. All KNIGHT Hi-Fi components are unconditionally guaranteed for one full year. Here is the best in musical quality at money-saving minimum cost.



New Knight DeLuxe 24-Watt High Fidelity Amplifier

- Response, ± 0.75 db,
- 20-40,000 cps 16 Positions of
- Record Compensation
- Variable Damping Control
- Continuously Variable Loudness Control
- Rumble Filter
 Separate Tone Controls
- Hum Balance Adjustments

This superb new amplifier is housed in a beautiful spacesaver metal case finished in attractive cork-grain with gold-tone control panel. Only 4 x 15 ½ x 11". Shpg. wt., 30 lbs.

94 SZ 701. NET only....

ALLIED **EXCLUSIVES**

New Knight Deluxe Basic FM-AM Tuner

- "Lock-in" FM Tuning (AFC)
 Tuning Meter for FM & AM
 Sensitivity: 5 Mv for 30 db quieting on FM; 5 Mv for 1.5 volts output on AM
 - -Detector and Tape Recorder

New Knight "Bantam" 12-Watt Hi-Fi Amplifier



- 3-Position Record Compensator
- Variable Damping Control
- · Loudness Control
- ± 0.5 db, 20-20,000 cps
- 6 Inputs
 Built-in Preamp

Maximum value in a versatile, top quality amplifier. In handsome case, with smart cork-grained finish. "Space-saver" design, only $3\frac{1}{2} \times 13 \times 10\frac{1}{2}$ ". Shpg. wt., 14 lbs.

94 5X 700. NET only ...

New Knight "Bantam" Basic FM-AM Tuner



only

- "Lock-in" FM Tuning
 Latest 7-Tube Circuit
- Improved AFC
- Output Level Control
- Wide Frequency Response
 High Sensitivity

A perfect match for the new "Bantam" amplifier, in beautiful cork-grain finish metal case, only $3\frac{1}{2} \times 11\frac{1}{2} \times 9\frac{1}{4}$ ". Shpg. wt., 10 lbs.

94 SX 703. NET only

only \$9995

New Knight "Uni-Fi" Tuner-Amplifier Combination

- Single Chassis Construction—Simple To Install
 Complete FM-AM Tuner—Preamplifier-Amplifier
 Compact Styling—4½ x 15½ x 11½"—Fits Annywhere
 High Sensitivity for Weak Station Reception
 10-Watt High Fidelity Amplifier With Every Advanced Feature

• 10-Watt High Fidenty Amplifier With Every Advanced Feature The logical high quality complete ensemble for limited-space applications; an ideal replacement for obsolete equipment in existing cabinets. Available in cabinet illustrated or in chassis form (4)4 x 15 x 10½%.

94 52 730. Chassis only. Shpg. wt., 17 lbs. NET only. \$99.95 94 52 731. As above, in cork-grain finish metal cabinet. Shpg. wt., 19 lbs. NET only...\$105.50

ALLIED RADIO CORP., Dept. 17-K-5 100 N. Western Ave., Chicago 80, III.

Ship me the following new KNIGHT Hi-Fi Components:-

_enclosed


Send detailed literature on new KNIGHT Hi-Fi Components

Address.

ALLIED RADIO

100 N. WESTERN AVENUE, CHICAGO 80, ILLINOIS

america's Hi-Fi Center



HARMAN-KARDON C-300 "TREND" AMPLIFIER

The "Trend" is a remarkable design of amplifier in many respects, not the least of which is mechanical rather than electronic. The use of 5881's in the output stage naturally causes the generation of considerable heat, and in a small enclosure this is likely to cause overheating of some of the components. In this model, however, the

arrangement of the tubes themselves and the shape of the air passages around them causes a high velocity of air current past the tubes and a consequent maximum of cooling effect without unduly heating the other components of the amplifier.

In the electronic department, the amplifier also offers many desirable features. Complete curves of response are not given since the three phono curves are close matches to the prescribed values, and tone control curves are quite conventional. The loudness contour control is unique, since it permits adjustment to exact match for the F-M curves, or to either 5 or 10 db more or 5 or 10 db less than the F-M curves. This gives a wide range of compensation which can be chosen to suit any particular car. Note from the schematic that there are two positions for each of the phono curves—one set being located at each end of the selector switch. One set gives normal phono curves, while the other introduces a highpass filter effect to eliminate rumble. A switch is provided to match Pickering, GE, or Fairchild pickups, and an individual level control is provided for each of the highlevel inputs. Note also that an output is provided to feed a tape recorder.

The variable damping control is of interest since it permits a change in the damping over six steps—and allows the user to compensate for the type of speaker used. Maximum damping is quite high, and is desirable for the highest quality speakers, with lesser degrees of damping giving optimum quality of reproduction with certain types of speakers and housings.

P-23


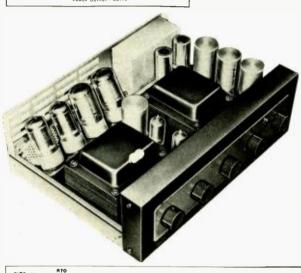


Fig. 7 (above, left).
Power output vs. 1M
distortion curves.
Fig. 8. (left) Harman-Kardon C-300
amplifier. Fig. 9
(below) Over - all
schematic.





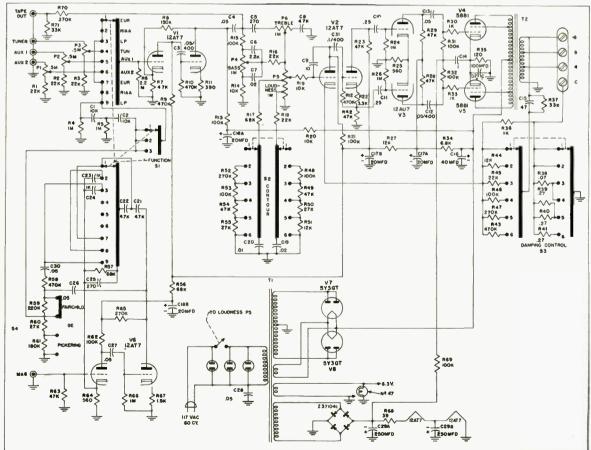

The T35B—for lower powered systems and existing quality AM-FM radio or radio-phonographs, finished in flat matte black. Requires only x36 to attach to music system AT37 level control optional. Impedance 16 ohms. Shipping wt. 2 lbs.



Beautiful Piccolino Accessory Enclosure for T35 or T35B, mahogany or blonde. List \$15.00, Audiophile net \$9.00.
The Piccolino, complete, Super-Sonax, X36 crossover and AT37 level control, wired to connect to music

The Piccolino, complete, Super-Sonax, X36 crossover and AT37 level control, wired to connect to music system: with T35 List \$90.00, Audiophile Net \$54.00; with T35B List \$70.00, Audiophile Net \$42.00.



Prove It To Yourself at Your E-V Distributor's — Test the T35 for yourself with this special demonstrator. You operate the switch that cuts the T35 in or out of an actual high fidelity system. Your ears give you the proof of Any high fidelity music installation shows amazing improvement in the last two octaves with the addition of the easily installed T35 or T35B. The E-V T35 is without equal in its ability to reproduce highest audio frequencies with distortionless purity. At least one more octave of silky highs is afforded through use of T35 for systems over 20 watts, or T35B for systems under 20 watts. Solid 180° dispersion is accomplished by the E-V developed diffraction slit type horn. E-V Model X36 crossover and Model AT37 level control are designed for use with the T35 and T35B. Impedance 16 ohms. Shipping weight 2 lbs.


T35 List \$55.00 T35B List \$35.00 X36 List \$14.00 AT37 List \$ 6.00

Audiophile Net \$33.00 Audiophile Net \$21.00 Audiophile Net \$ 8.40 Audiophile Net \$ 3.60

TODAY— write for Bulletin 194 and name of nearest E-V dealer.

Electro Voice

ELECTRO-VOICE, INC. . BUCHANAN, MICHIGAN

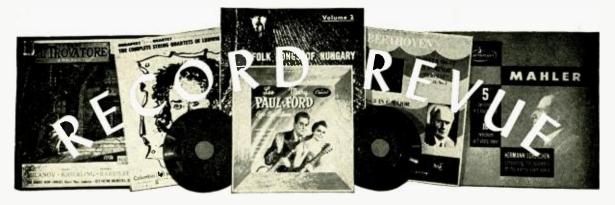

EDWARD TATNALL CANBY*

1. MUSIC OF THE PEOPLE

Music of India. Ustad Ali Akbar Kahn, Pandit Chatur Lal. Introd. by Yehudi Men-

Angel 35283

This is more than just another hi-fi disc of oriental sounds, exotic but largely incomprehensible to Western ears. The reason that it is more than this is simple—here, as rarely happens, are two complete samples of a type of non-Western Music, played at full LP length without a break, taking advantage of the LP medium to do more than merely sample a few tiny moments here and there out of numerous much longer wholes. That's what we really here from the correct

what we really hear from the orient.

I don't mean to imply that these two works of music, one on each side, have a rigidly determined length. Not at all, if I understand this sort of highly controlled improvising. Neither does a jazz jam session have a rigidly predeter Veither mined length. But a three-minute sampling of a jazz get-together tells us about as much about mined length. But a three-minute sampling of a jazz get-together tells us about as much about the whole thing as a three-minute slice of these "ragas"—compared to a full LP side, as here recorded. Perhaps on occasion these semi-improvisations from India are longer, or shorter. But a half hour, more or less, is easily enough to encompass a full accounting in muscial terms of the "raga" expression. It builds up from a quiet beginning, over this long period to time, to an almost frenzied ending—and a brief sample, whether at the beginning, middle or end. could whether at the beginning, middle or end, could not possibly convey to us the sense of rising tension and drama, the almost hypnotically dynamic monotony, of this highly skilled and stylized music. It gets over even on one hearing—it's music, after all, and it is produced by and for human beings who are not hasically unrelated to ourselves! It should, and does, have a direct appeal even to the uninitiated, when given its proper chance—i.e. a proper time-length,

I'll leave the listening to you, without too much explanation, except to say that this music is constructed by a string (twang and pluck) player and a percussion man, on a mutual play of variation, gradually building up, based on two funda-mental and fixed ideas—a fancy scale or mode for the pitch and a rhythmic pattern, repeated, for the percussion. The scale is related to our scales, as any ear can hear—with an effort not unlike our majors and minors and folksong modes—but it also includes strange notes that at first seem out of tune, though of course they aren't—for Indian ears. Or for ours either, once we get used to them.

An immediately interesting feature of the scales used here, the ragas, is that they go upward with one set of tones and downward with quite a different set. Two scales in one. Even more odd, the scale does not progress straight downward but turns back up occasionally, like a melody— thereby indicating that a "scale" to an Indian is not exactly what it is to us. In fact, the raga is a sort of combination of mode-like our major or minor—and theme, serving in both functions as a basis for the ensuing improvisation.

Not so strange, when you come to think of it; for we have double-function ideas too. The harmonic sequence of chords that goes with a

* 780 Greenwich St., New York 14, N. Y.

popular tune serves just as much as a basis for jazz variation as does the melody itself, and any old ear (any ear that's listened to radio or juke

old ear (any ear that's listened to radio or juke box) can hear both things at work in a jazz session. Harmony pattern, melody pattern. This Indian music, wholly different in sound and style (and without harmony), nevertheless works on the human ear in a similar way, however complicated the theory and the rules and whatnot. People are people, the world over.

Can we hear all this in the music? Yes! Maybe you won't get it all the first time. But just play through either one of these pieces and then go back and play the introduction, with Menuhin's explanation, and listen to the "scale" or raga itself. You can't miss the connection between it and what has happened for a half hour. It's dinned into your head, after all. And the two ragas, a morning one and an evening one, are very clearly and noticeably different, to the most untutored musical ear. As different as major and minor, only more so. minor, only more so.

A real hi-fi sound, though in the nature of it the music hasn't much bass and won't do much for your horn-type woofer. Lots of twang for the tweeter.

Note: The artists, recorded in N. Y., are top-flight specialists in India. Menuhin "fell" for this music on a recent trip to India—hence his spoken presentation here. No violin playing from him, but an interesting enthusiasm. No singing voices. All instrumental. The ragas are extremely voices. All instrumental. The ragas are extremely ancient and the rules and the meanings attached to this music are exact, subtle, and complex; this is a high-class sort of jazz-type tradition that, however, has been kept alive for untold centuries instead of a mere forty-odd years. Will acc last as long

Yugoslav Rhapsody. Yugoslav Folk Songs. Members Yugoslav Nat. Dance Theatre; The Slovenski Octet, Ljuljana.

If I've said it before, I'll say it once more: folk music, when still "free," still music of and folk music, when still "free," still music of and by people taking its own natural course according to local popularity, skill, taste—is always changing, always "modern," always a reflection of its own surroundings. Most important, it always combines older traditions with newer, present-day influences, whatever they may be. "Pure" folk music in this sense doesn't exist. or if it does, then it merely reflects an isolated, "pure" in the sense of the pure in the sense of the pure in the sense of the pure in the pure in

"pure" civilization removed from any thing but itself. That doesn't happen very often these days. Only in places like the Australian bush, a few deep back valleys of Kentucky and Tennessee, or the hinterlands of Scotland where, during the last 300 years, our modern harmony has still failed to penetrate.

This very musical Yugoslav recording, festivalstyle, assembles a lot of present-day local music-making in a series of pieces from different parts of that very mixed country, made up of groups and groups of unlike people, only beginning to unify their culture into one highly colored patchwork quilt. The music is strongly local, nationalistic in sound, but thoroughly modern. Accordions, mandolin-like plucked instruments like those of the Russians, Poles, etc., ordinary violins, basses and standard accordions, play in orchestral

format, touched up with exotic sounds now and then from strange "folk" instruments of one sort or another; the tunes range characteristically all the way from those that sound almost Austrian or Italian (nearby areas) to Russian or Czechstyle tunes and wild and strange Turkish-Eastern melodies that defy harmonization, yet somehow are harmonized anyway.

The voices are similarly mixed. Trained voices, amateur-style choruses, local "folk" singers are all here. Solos, some of them exotic and highly ornamented in some ancient tradition, are mixed harmonized choruses, local yells—JAA-OO!—and sophisticated harmony-humming. HOOO! This is the way folk music goes—bending freely to every influence that comes along, ancient or modern, local or from the outside. Strictly mixed breed and very genuine.

The tunes on the first side are the best, as done by the Dance Theatre people. Many are really heautiful, with that eloquent sort of expresreally headthul, with that eloquent sort of expression we know already in Czech and Russian and Polish music. Many of them fall into that expressive mode technically called mixolydian-from G to G in white notes on the piano—which is a rarity in English folk music (including the U. S. Southern mountain music) but, oddly, its the very basis for our blues, the "lowered 7th" or "blue note" scale. It lends itself wonderfully to a certain ecstatic, simple harmony, often heard in Russian folk music, as well as to the color" effects of the blues.

The second side is devoted to a male Octet, unaccompanied, singing in close harmony. It sounds Don Cossackish a bit (with big, wavery solos) but softened by a sort of Austrian Tyrolese schmaltz. (At least to our ears it might be thus described.) A bit too fancy for my taste, but those who like male harmonizing should run for this quick. Very polished stuff.

Second World Festival of Folk Song and Folk Dance, 1953. Douglas Kennedy, commentator

Westminster WL 5334

This generous LP record contains excerpts from the folk presentations of the world—or at least the eighteen countries represented at this teast the eighteen cointries represented at time festival, held in two towns on the French-Spanish border, Pamplona and Biarritz. Westminster has attacked the eternal problem of excerpting here in a happy way. The musical examples are introduced by Douglas Kennedy, head of the English Folk Dance and Song Society and one of the leading figures at the festival, whose clear Paritish weare and fixedly necessarily weats this British voice and friendly personality make this disc far easier listening than most of its type; he maintains continuity from one event to another and his explanations allow the lazy man to listen

and his explanations allow the lazy man to listen without the laborious following-of-the-notes that is usually necessary if you want to have any idea what's going on.

This, again, is living folk music mostly, and again it varies according to local option from the archaic, carefully preserved, to the strictly modern-influenced. There are orchestras, harmonies, sophisticated night-clubby sounds and also sounds that are weird and primitive; but the average is

in-between, a most interesting mixture of both.

It should be pointed out, I think, that this mixture is no compromise on the management's part.

AUDIO • OCTOBER, 1955

LEONARD RADIO Presents...

The NEWEST and FINEST in Hi-Fi To Be Exhibited at the

New York Audio Fair

Miniaturized "Preamp with Presence"

As described by C. G. McProud in the May issue of AUDIO. Three tubes—preamplifier with three phonograph equalization curves, presence control, volume and loudness controls, and Baxendall-type bass and treble tone controls.

Complete kit of parts, including the basic kit and all other parts and tubes as specified by the author. With complete instructions \$35.50



BOZAK 207A SPEAKER



PERFORMANCE of the highest order makes the Bozak B207-A the fastest selling two-way Coaxially mounted system. The sound is clean throughout the entire audible range. The B-207A fits all standard cutouts for 12" and 15" speakers.

B-207A		Net 83.85
B-199A	(waofer)	Net 49.50
B-200X	(tweeter)	Net 30.00

GARRARD 301 TRANSCRIPTION TURNTABLE

RECOMMENDED, because this machine has been designed to provide the professional user and quality enthusiast with a unit supreme in its class . . . truly the world's finest transcription turntable for use in the home!



SPECIFICATIONS: Voltage: Dual range, 100 to 130 and 200 to 250 volts. 50 cycle pulley available. Wow: less than 0.2%. Flutter: Less than 0.05%. Rumble: Virtually non-existent.

BOZAK 305 SPEAKER SYSTEM



LISTENING is the genuine test, and you'll hear why this medium size, three-way speaker system is the first choice of music lovers everywhere. The clean, typically-Bozak balance, perfect transients, wide-range high efficiency from the deep bass to the highest treble, inaudible distortion, and a full 120° of useful listening area, combine for superb fidelity and listening ease in any average listening room. The B-305 con-

listening room. The B-305 consists of two B-207A Coaxial units, one B-209 Mid-Range and a N-102 Network. All components are correctly phased, wired and mounted in beautiful hand-rubbed cabinets.

B-305																								Net	390.00
				(a	ve	ail	a	Ы	e	in	а	٧	a	rie	et	y	0	f	fi	n	is	h	es)		
P-305P	(p	a	ne	ı	m	0	ur	ıt	ed)													Net	249.00

LEAK ARM WITH DYNAMIC PICKUP (Moving Coil)

PREFERRED by experts the world over for its advanced design and quality workmanship. Stylus: size —0.001" radius + nothing



- 0.0001". Material—diamond only. Frequency Response: Total variation—1 db 20,000 c/s to 40 c/s with the LP head, including transformer.

Model A		Net 59.00
(this incl	udes arm, transformer, and microgr <mark>o</mark>	ove pickup
	with diamond stylus)	
Model B	• • • • • • • • • • • • • • • • • • • •	Net 32.50
	(78 rpm cartridge and stylus only)	

See our exhibit at the Audio Fair to be held at the Hotel New Yorker on October 13th through 16th.



Our 1956 AUDIO REFERENCE GUIDE will be available soon. Write us for information on how you may obtain your copy.

MAIL AND PHONE ORDERS FILLED 25% DEPOSIT, BALANCE COD

It does, indeed, represent folk music as it now exists in many localities; it does, indeed, reflect the world as it is, part fused and as one, part independent and sectional. What counts in a folk festival is, first, that somewhat abstruse quality, real musical value—"the best" of each type of music —and secondly, what one might call wise moderation in choosing material, midway between the primitive (so often artificially kept alive, beyond its time) and the too-modern, influenced by comits time) and the too-modern, influenced by com-mercialized radio and recorded material, heard the world over. If you know the musical pitfalls into which this kind of a jamboree can tumble, you'll agree that Mr. Kennedy and his interna-tional cohorts did a good job here. As to the editing—a gallant attempt to solve an impossible problem! The trouble is, you can't play all of each piece, for most of them tend to go on and on. Westminster has done nobly with most, catching the music at the end of a verse, at a cadence, or if necessary, just fading it gently

at a cadence, or if necessary, just fading it gently were gently—way. But there are a few horrid moments, such as that when our own Jean Ritchie, of Kentucky, is cut off only a few notes

from the end of one of her songs. (But she sings another one complete,) Excellent recording, a minimum of background clutter and plenty of hi-fi clarity

es Bords du Saint-Laurent. Pierrette Champoux, sopr.

Esoteric ES 526 Russian Folk Songs. Great (Russian) solo artists.

Vanguard VRS 7024 (10") Siqueira: Xango. Eight Brazilian Folk Songs. Alice Ribeiro, sopr., Cho. & Orch. Vanguard VRS 465

Here are three folk records illustrating three approaches to folk music that, in my book, are something less than hot stuff.

The "Saint-Laurent" disc features a pleasant night-clubby entertainer with a piano-and-fiddle accompaniment, singing French-Canadian and French songs. Musically the performance is of the shallowest interest, notably in the feeble tumtum-tum accompaniment. The tunes are good and the words (French) come through.

The Russian disc makes the classic mistake (again, in my book) of assigning famous singing (again, in my book) of assigning famous singing voices to the folk-song role. The orchestra is folksy but most of the singers, Russians all, have had too much opera and the like to put aside the stage stuff that so quickly spoils any sort of folk tune. In the same category as "Home Sweet Home" or "Swing Low" sung by Helen Trauhel with Symphony Orchestra, and a lot of people like it. But it ain't folk, not even in Russia.

The third disc. from Brazil, features a composed "cantata" based on folk-like ideas. I found it pretty dreadful and swfully endless, though the

posed "cantata" based on folk-like ideas. I found it pretty dreadful and awfully endless, though the soprano is excellent and the performers (in the hundreds, it seems) are enthusiastic. The folk songs on side 2, are arranged for a sophisticated and slithery modern orchestra which, fortunately, is recorded rather in the background, letting the tunes get through on their own. Arrangements by the conductor-composer, Mr. Siqueira,

Music of Africa. Mouange & His African

Vanguard VRS 7023 (10") Festival in Haiti. Jean Léon Destiné. Elektra 30 (10")

These two are of the travelling troupe variety and both have a good deal of interest, in spite of the entertainment veneer that inevitably gets into these presentations. Both are super hi-fi and good for that reason too.

The Mouange disc, a group from the Cam-coons, shows frank and open "Western" influeroons, shows frank and open "Western" influence—and is interesting for that very reason, since the clear (for us) traces of Bing Croshy and his successors, of American banjo and guitar music, are still only beginning to be digested. What probably sounds highly sophisticated to the

what probably sounds nightly sophisticated to the African locals has a strange air of primitivism for our ears. Bing in a loin cloth! Native dialect, of course, and plenty of African tradition, as well.

The Haitian-French Destine record, from nearer home, is best in its primitive moments, with calypso-like chorus repetitions, fancy drum work. Destine's own works he assuring to the course of work. Destine's own voice has acquired a very Hollywoodish polish somewhere along the way to fame (he is a dancer as a first attraction) but the Haitian stuff is still pleasingly present and the record is attractive.

Best feature is a remarkable tin-pipe player who does a set of variations, "Carnival in Venice" style, on his penny whistle that is as extraordinarily musical as it is utterly un-Caribbean. A real musician, that one, and a virtuoso of the in

Folk Songs and Dances of the Basque Country. Chorale Basque Oldarra, Oyhamburu.

Vanguard VRS 7031 (10") Austrian Folk Music, Vol. 1. Preinfalk Choir and Folk Orch. Vanguard VRS 7026 (10")

These two are both highly musical—and what more can you ask? Both contain, once more, that modern, "free" folk music that is not out of collections but out of continuing daily use. That means, of course, harmony, arrangements, a "folk" orchestra of ordinary standard instruments, and as usual a touch here and there of ancient local customs. In Austria it's a yodel or two; in the Basque country (France-Spain) it's a peculiar yocal scream—supposedly imitating a a peculiar vocal scream-supposedly imitating a

a peculiar vocal scream—supposedly imitating a horse's neigh or something—as well as a species of tinny flute that joins in every so often. These are decidedly Shorter Play LP records, but the quality is terrific, at any price. Excellent listening

The Columbia World Library of Folk and Primitive Music. Vol. XI: Japan, the Ryukyus, Formosa, and Korea. Columbia SL-214 (1)

Another volume in this remarkable series-I'm taking them a few at a time rather than tackle a lump review of all umpteen records at once. There's much too much in them for that. (See "Scotland," below.)

The Japanese volume is most interesting and quite beautifully done. I tried out some of the Japan-proper stuff on one of the girls from Hiroshima, staying with us pending her plastic surgery, and got an instant recognition, as well as a translation. But other music from further afield-even from nearby parts of Japan-was un-



AMPLIFIER

The new McIntosh power amplifier MC-30 is unequalled for quality reproduction of high fidelity sound. The basically different, patented McIntosh circuit guarantees a new standard for low distortion-1/3% harmonic, 20-20,000 cycles, even at full power output! Hum and noise level-inaudible (90 db below full output). This outstanding performance assures new listening enjoyment without fatigue. Quality crafted by amplification specialists for lifetime satisfaction. There's nothing like the McIntosh. Hear it at your dealer's.

Write today for complete specifications

McINTOSH LABORATORY, INC.

324 WATER STREET . BINGHAMTON, NEW YORK Export Division: 25 Warren St., New York 7, N. Y. Cable: SIMONTRICE N. Y.

familiar to her, and not even mildly intelligible. Evidently much of this music is of a sort midway between our folk and popular music categories, combining the wide currency of our disc jockey favorites with the immemorial localized traditions of the oldest folk music.

of the oldest folk music.

Much of the music is thoroughly un-Western,
with strange instruments and odd, wheedling,
snarling voices, but there is, for a good contrast,
quite a bit of recognizable Western influence to
varying degrees in some of the music, no doubt
reflecting actual conditions as of now. A reasonable and intelligent choice of material, it would
seem.

The outer geographical areas included are utterly different in their music, emphasizing the utterly different in their music, emphasizing the sharp ethnological differences between peoples of the once Japanese empire. An interesting section concerns the Formosa tribe that sings in harmony, of an odd and beautiful sort. Big question, not settled: is this actually an independent oriental discovery of the harmonic combinations of sound upon which Western music has been built? Or, just possibly, does this music represent the last remains of some forgotten Western mission-ary hymn-sing in ages past, taken over and ab-serbed by the oriental natives? Sounds very much like the latter to me.

A good part of this disc rates "hi fi" and all of it is easily and comfortably listenable. The selections are generally long enough to allow musical interest to get through.

The Col. World History of Folk and Primitive Music, Vol. VI: Scotland. Columbia SL-209 (1)

This one is a far cry from the Japanese disc, and even more interesting; indeed, it is a pricele s collection and may well revolutionize your ideas not only of Scotch song but of the possibilities in folk music of our own "background" peo-ples, in the English-speaking area. Does music like this exist in Great Britain—today? It most ce tainly does! Most of the recordings were made, hi f. in 1951.

The two sides are divided appropriately into thit expected over-simplification, the Lowlands and the Highlands. A more noticeable and much more audible division is linguistic, between the lewlands Scotch-English and the Gaelic of the H ghlands that occupies side 2 almost exclusively. What an extraordinary language and how very much alive it is still! If Italian is the finest tongue for fancy opera and the like, then surely Gaelic beats them all for folk music. Such effects, su h effortless and complex rhythms you can scarcely imagine. And such friendly, good-hum red, energetic, exciting, foot-tingling music has seldom been put on records.

Side 1 (it might as well be in Gaelic for all I

Side 1 (it might as well be in Gaelic for all 1 can understand of the Scots) features the more urbane and civilized music, bagpipers, bands, pub songs, ballads in great profusion. Side 2 gets into songs, ballads in great profusion. Side 2 gets into the remarkable work songs of the more isolated Gaelic-speaking areas and it is here that the memorable stuff occurs. I'll say no more—but the disc is recommended very highly for anybody at all with an ear for good tunes and rhythms and beautifully projected language.

(Note: If your dealer hasn't got this series in stock he should be able to order it for you with-out trouble. The records are available significant.

out trouble. The records are available singly.)

SOLOS FROM CAPITOL Moussorgsky: Sunless Cycle. Prokofieff: Five Poems of Anna Akhma-

Capitol P 8310


A first-rate collection of Russian solo songs, sung by one of the great Russian-language singers in a remarkably clear and transparent recording my only reservation being that the piano is too much in the background for the strength that is in much of the piano writing here. The voice is close-to, with wonderful presence and naturalnes. Kurenko has a superb microphone personalit—she is as phonogenic as Jennie Tourel, which is saying a lot.

The Moussorgsky "Sunless" cycle is of that undue, dark, dramatic expression for the solo voice, half speaking, half beautiful melody, with shiting, brooding harmonies, that you've heard in "Boris Goudonov" and in the Songs and Dances of Death. Nothing else quite like it in song literature. The Prokofieff works are strangely similar, written in the same dark-colored Russian

similar, written in the same dark-colored Russian tradition, with Prokofieff's own fine melodic sense

THE **ONE** SPEAKER FOR ALL LOW-LEVEL P. A. INSTALLATIONS

By Altec Lansing — A Famous Name in Sound!

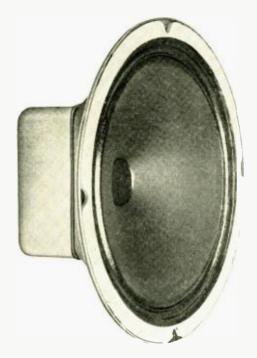

Altec Lansing 401A

8 ohms Impedance-Resonance-75 cos Voice Coil Depth-3-5/8" Frequency Response -60 to 10,000 cycles

In public address or paging systems requiring a number of speakers to be operated at low levels, the Altec Lansing 401A is your best choice. Offering the highest quality available in inexpensive 8" loudspeakers, the 401A has a frequency response of 60 to 10,000 cycles—well beyond the ordinary performance of public address speakers.

The low price of Altec's 401A also allows you to install more speakers for the same investment. At only \$13.20, the Altec Lansing 401A is your best buy-and your best choice -for high quality, low-level performance in any public address or paging system.



LOUDSPEAKERS . AMPLIFIERS . PREAMPLIFIERS . TUNERS . ENCLOSURES

and piquant harmonies. Gretchaninoff's songs are much less stark, flowing easily from the great Ro-mantic tradition. Their piano accompaniments are more active than the others, come through more effectively in this recorded balance that favors the

Extremely quiet surfaces, very low distortion high fidelity in truth.

Bach: Partita #2 in D Minor; Sonata #1 in G Minor, for Violin Alone. Nathan Mil-

Capitol P 8298

Turn your bass control all the way down for these works—there is no bass below middle G on the bass clef, the lowest string on the fiddle.

Somewhere around 200 cps.

The unaccompanied Bach works persist in appearing both in concert and recorded form again and again and it is not entirely the desire of viohinists to show off their provess. The music is of the sturdiest and most effective sort, the only technical difficulty in the way of understanding it being simply that these are skeleton works—big being simply that these are skeleton works—big compositions sketched out on the fiddle with a minimum of notes, suggesting many harmonies that aren't actually played, compound voices that can merely be touched on, juggled with, a bit of one than a bit of another, to keep them all flowing in the listening mind. Proof of the music's easy appeal is in numerous transcriptions, for piano, orchestra, etc., that, with the implications all realized and written out in so many notes, have long since become popular favorites.

Several things make the solo works easier for today's listening than in the past. First, hi-fi and big, resonant acoustics blend the brilliant fiddle tones together making the harmonies easier to

tones together making the harmonies easier to grasp, enlarging the music to its intended "size" and impressiveness.

and impressiveness.

Second, with the general spread in Bach-style knowledge and familiarity, the violinists themselves make a great deal more sense of these works than their elder counterparts used to do. They hear the harmonies; they play with more accurate pitch, less fancy slithering, and thus they get the sense of the music over to the listeners—who themselves tend to know the style better now than in the past. than in the past.

Milstein's performance is the epitome of per-

fection in these respects. Big, resonant, ultra-clear hi-fi recording, beautifully accurate in pitch, the harmonies and suggested skeleton superbly the narmonies and suggested skeleton superbly projected and thus easy to follow in the listening. The music isn't all "easy," notably the slow movements; but the light-fingered dance movements, suite style, make up for them for the beginner. If you are onto Bach at all you'll find this highly palatable stuff, bass or no bass.

Capitol has a major asset in Milstein and I suggest a long listen to his other Capitol recordings, notably with the Pittsburgh Symphony and

Beethoven: Piano Sonatas #23 ("Appassionata"); #21 ("Waldstein"). Gorod-

Capitol P 8264

Excellent Beethoven of a modernly lean and angular sort but highly musical. Gorodnitzki pays angular sort out figury musical. Gorodnitzki pays plenty of attention to the details, bringing out the fast notes in the "background" that many a more romantic pianist tends to blur into the general dramatic picture. His bass-feeling is excellent, the dramatic picture. His bass-feeling is excellent, the progression of harmonies always clear and with a fine sense of harmonic drama. There are no fancy rubatos nor other idiosyncrasies to annoy you; the music is neither overdramatized—"this is a famous work"—nor is it tired-sounding, those being the twin plagues of too many playings of this sort of music. In other words, here's a good bet if you want real Beethoven, and a good disc to compare with those of other famous Beethoven performers who may have other things to contribute to the music. tribute to the music.

Surfaces on this somewhat older pressing are not too good but newer printings no doubt are up to Capitol's current ultra-high standard. The piano is recorded fairly close, a bit on the percussive side, with fine, full bass.

La Valse. (Ravel: La Valse, piano version; Valses Nobles et Sentimentales. Delibes: Naila Waltx, transc. Dohnanyi. Joh. Strauss: Sweetheart Waltxes, transc. Dohnanyi.) Leonard Pennario.

Capitol P 8294

A collection of waltzes on the piano among

which the two Ravel works, extended composiagain what I've felt before, that Mr. Pennario's fabulous finger technique does not make up for a hard, unmusical approach, that turns the sensitive and powerful Ravel here into an ugly mechanical powerhouse of crashing superpianism. Pennario bangs the strong beat unmercifully; with all his desterity he somehow lacks what both dancers and musicians might call rhythmic "lift," and his sense of style is not agile enough to project the Gallic edge, the rapier strength and polish, of Ravel's extraordinary music. The other works, less important (and much less subtle) come through more effectively and pleasantly.

Fauré: Four Piano Works; Ravel: Valses Nobles et Sentimentales; Toccata (Tombeau de Couperin). Jean Michel Damase, piano

London Int. TW 91035

comparison with the above. Damase, young and French, plays the Ravel waltzes in a star-tlingly different manner from Pennario—it would be hard to guess they are from the same printed notes. This version is all coy and quiet, a French salon. Parisian might club sort of Ravel. No grand concert hall; the recording is soft and close-up, discreet as any background music, the playing is minus pedal in an almost jazz-popular style. And yet, though this is hardly the Ravel most experienced listeners would expect, it is nevertheless very musical—that subtle quality that can make even an out-of-style performance good. If you're curious, try it yourself; it's well worth-


while.

The Fauré, out of an earlier time, is played perforce more loudly and Romantically. I prefer the Ravel. The old master would have made a fine night club pianist himself, you may be sure.

Notes, in this International edition, are entirely in French, on the inner liner. Nice, if you savvy.

A NOTE ON CAMDEN

Camden records. RCA Victor's mostly semianonymous low-priced line, are a boon to listeners but somewhat of a problem to reviewers, who if they have lived long enough have already reviewed many of the items in their old 78 rpm non-

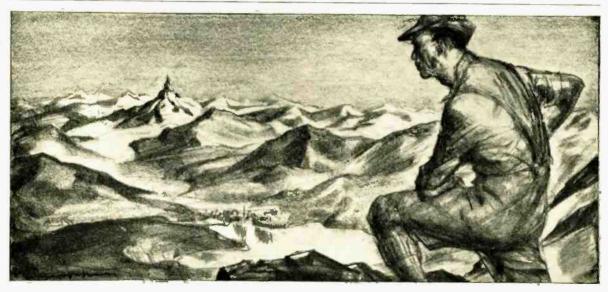



Sound with Alpine Clarity

That is the fidelity that comes with Norelco loudspeakers, made by Philips of the Netherlands. Every note in every register, whether voice or instrument, with Alpine-air clearness. A perfec-tion resulting from the use of a new construc-tion—with "Ticonal" steel. The most powerful of magnet mediums that allows more compact units and outmodes awkward "woofer" and "tweeter" construction.

Model 9750M-81/2" Speaker. Rating Power-6 watts; V.C.IMP .- 4-6 ohms. List Price-\$36.95. Price subject to usual audiophile discount.

Available at leading jobbers or write direct. THE DUOTONE COMPANY, INC., KEY-PORT, NEW JERSEY. Supplier and Manufacturer of Duotone Needles.

anonymous guises. The Camden proposition is a elever and useful one—to reissue the "oldies" (and some brand new specialties too) at a very low price, with full quality RCA technical work and first class material for the discs themselves, the price made possible by amortization over the years of the first cost of the recording sessions themselves plus an anonymous billing for those records—most of the Candens—which compete with the musical produce of the same organizations today. tions today

Every commentator and most collectors have busily solved the somewhat transparent riddle of orchestral anonymity posed by such names, maintained consistently by RCA, as the Centennial Symphony Orchestra (Boston Symphony), Warwick (Philadelphia), Festival Concert Orchestra (Boston Pops), Carlyle (Czech Philharmonic), Star Symphony (Hollywood Bowl), and so on; the conductors are nameless and not so easily spotted, though an old record book or catalogue of the pre-1948 date will show you most of them quickly enough if you want to identify them.

What is there in Camdens for the record owner whis good, wide-range equipment? As RCA says,

with good, wide-range equipment? As RCA says, here are some of the great recorded performances. tops musically in their time and certainly tops today as well in many examples. For the moment, lets not quibble as to choice in the reissues— the general principle is clear, that these were once-fancy high grade performances and music-ally, still are. These are first-rank performers in

the main. Technically most of the Camden recordings are very much out of date (though some are recent and a few are brand-new). They are in major respects improved over the originals—netably in the unbroken long-play and in the complete absence of surface noise. The bass, even in the oldest ones, is generally good—far the time they. even in the oldest ones, is generally good—far better than could be reproduced at the time they were released. But the highs are largely lacking and on good equipment this tends to make the total sound seem tubby and dull unless you roll off your bass, to match. (Table-type plionographs den't have enough bass to create a problem here.) For your information in your own scheme of things, here are some further observations.

A. Highs are generally rolled off to around 6000 cps. as I hear them. This, of course, is higher than the highest tones that could be reproduced by the older phonographs. But for many of us it will still be noticeably dull, compared to

by the produced by the older phonographs. But for many of us it will still be noticeably dull, compared to the sound of new recordings. Not necessarily important—if you value the musical performance.

B. Distortion is a more vital matter. It varies from nil to quite noticeable, in spite of RCA's best current wizardry. Watch out for several kinds—mostly absent. I hasten to say, but not always. 1, "Peaky," ringing sound, a sort of ho low effect, or a background whistling. (Some of this may have been added to bring up brilliance on very old but valuable recordings.) 2. Buzzy, tinny sounds in the louder passages—the rest may be beautiful. This is inevitable among many older 78 recordings. (Also there may be periodic deterioration as the 78-rpm sides reach the inner grooves). 3. An over-all thinness of sound, partly acoustical and partly in the recording. Our tastes in acoustics have changed raically since pre-war times: we may dislike now what we used to enjoy. Many of the older retordings, in any case, lack the sharp definition that modern microphone placement gives us—lot-of close-up detail work, in a big, golden liveness. Some people like it better the old way, bon't be overly discouraged by the above. Just look first at the prices and then at the performances and—for one reason or both—you'll find yourself ready to risk the old sound. Generally speaking, Camdens are not going to sound like new records on fancy equipment no matter how you dicker the controls—except the few that are in fact brand new. But on average commercial home one-piece phonographs they will be mostly indistinquishable (as RCA well knows) from the ewer discs, and are therefore top values.

Indeed, this. I suggest, is the solid main base of the Camden idea, and it is realistic. Most perole, in the mass, still listen lo-fi and can't really tell a new record from an old one. They

A NOTE ON STEREO TAPES

Ill take a bit more review space to say that, though at the moment there are very few two track stereophonic ("binaural") tapes on the market and they are expensive, the possibilities, now that the Ampex sterephonic phonograph has

(Continued on page 110)

AUDIO • OCTOBER, 1955

NOW! THE ARM THAT SETS A NEW SOUND-STANDARD IN HI-FI



NO TRACKING ERROR . NO SCRATCHING . NO FUMBLING

ORTHO-SONIC DOES NOT MINIMIZE . . . IT ELIMINATES TRACKING ERROR

In ORTHO-SONIC V/4 you get the only multiple precision ball bearing arm which guides the stylus radially (from edge to center in a straight line). This action duplicates the exact path of the original cutting stylus. Distortion due to tracking error is completely eliminated.

NO OTHER TONE ARM GIVES YOU THESE FEATURES

Scratchless Starting-Faultless Stopping. A slight tilt of the arm lowers your stylus on the record. A gentle contact is assured each time . . . regardless on what spot you want to start your record. You don't touch the cartridge when you stop-just tilt the arm. No scratching is possible.

Another exclusive feature of ORTHO-SONIC is the accurate cueing it affords by the permanent indexing scale, magnified at the point of reference. You can start any designated passage of your record without fumbling! This feature alone makes the ORTHO-SONIC a MUST for professionals and hi-fi enthusiasts.



Easy to install. Two screws, and the job is done. Plays records up to transcription size. Adjustable to transcription size. For to any height turn table



"Nothing rolls like a ball." Four precision ball bearings are the heart of ORTHO-SONIC V/4. Movement is practically frictionless. Torque less than 1 gram. Maximum record life assured.



Fits all popular model cartridges —including turn-over types. Sim ply stide cartridge in place and tighten thumb screw. Adjust weight in seconds.

SCIENTIFIC TESTS BY LEADING LABORATORIES FIND ORTHO-SONIC V/4 "FIRST RATE"

"Less than 2% 1. M. distortion at all Tracking forces from 1 gram up . . . No resonances could be found between 35 and 1,000 cps . . . Installation and leveling of the V/4 are unusually easy to accomplish . . . General listening quality of the arm is first rate . . . Cueing is remarkably precise . . . when the stylus is lowered it generally falls in the same groove it was playing . . . Needle talk was negligible. No acoustic resonances could be heard . . . it delivers its optimum performance at tracking forces as low as 3 grams

ORDER YOUR ORTHO- SONIC V/4 AT OUR RISK

\$44 50 A Low Price For This Precision Instrument

INTRODUCTORY SHOW-PRICE:

95 POSTPAID

VALID ONLY UNTIL NOV. 30, 1955

You'll save its cost many times over by preserving the life of your records.

BARD RECORD COMPANY INC. 66B Mechanic Street, New Rochelle, N. Y.

...ORTHO-SONIC V/4 for... Tone Arm(s) (including postage). It is agreed that if I am not completely satisfied, I may return same within 10 days for

NAME

ADDRESS ...

CITY & STATE

www.americanradiohistory.com

Listening quality

is everything!

CHROMATIC Hi-07

Today all pickups, good, bad or indifferent, have wide fre-quency range. Yet, one will perform smoothly, while the others are harsh, shrill, etc. The new high output Hi-Q7 has BALANCE, SMOOTHNESS, LISTENING QUALITY, not equalled by any other pickup. But only YOU can tell what sounds best

to you. Hear and compare the Hi-Q7 with any other pickup known and-YOU

be the judge. Plays all speeds. Equipped with Chromatic DIAMOND and a sapphire stylus, BOTH replaceable AT HOME. The Hi-Q7 is magnetic, of course.



NEW COMPASS-PIVOTED ARM

Universally acknowledged as the most efficient arm—barring none. No restraint+ No frontal oscillations. No springs. No fatigue. Highest tracing efficiency. Equipped for stylus-pressure adjustment. New adapter makes this superb Audax arm usable with practically all cartridges.



STYLUS-BALANCE

this really works ... " Canby

With the scales and gauges available heretofore, it has been impossible to check stylus-pressure closer than 2 or 3 grams —one way or the other. That is 50% off-correct. This means deformation of groove-walls, which explains much of the echoes, ghosts and other distortion. Stroboscope-like, STYLUS-BALANCE ac curately indicates correctness or incorrectness of stylus-pressure. Precision-calibrated as a pharmacist's balance. Works with any arm and cartridge. Gold Finish. Net \$4.80 (add 25¢ if shipped from N. Y.)

FREE copy of "ELECTRONIC PHONO FACTS" at your dealer's, or write us.

AUDAK COMPANY

500 Fifth Ave., dept. A, New York 36 Fine audio-electronic apparatus over 30 years

AUDIU ETC.

Edward Tatnall Canby

1. Business as Usual

SUPPOSE I COULD start this month's contribution with any one of several stock openings—"By the time you read this," or "As I write the following lines," or maybe the corniest opening of all, "This is the story of . . .". Not a one of them, right now, seems potent enough to yank you, the reader, right back with me into the middle of late summer and to my present—as of this writing-place-time situation.

You see, as of this moment, we in Northwestern Connecticut have been wholly out of touch with the outside world (including the main office of Audio) for three or four the main office of Aumo) for three or four days. No telephoning allowed, no mail, no papers, and only a few thousand hours of hysterical generalizations on the radio to tell us what's happening 'tother side of the mountain. All this because of two fickle ladies, first Connie, then Diane; Diane is the gal who was unabashedly pronounced dead a couple of days before she lambasted this area with some fifteen-odd inches of rain in a bit more than a day. For us that's rain in a bit more than a day. For us, that's a mere four months' supply of the liquid, and Aliss Connie had presented us a few days earlier with nine or ten inches, another three months' worth. Phew!

other three months' worth. Phew!

And the silly part of it is (as with all such disasters) that here I sit and survey a scene completely undamaged, perfectly normal. We have phone (though we can't call long distance); we have lights, power, water, our road is merely potholed; my local gas station overflowed my tank absent-nundedly when I went to fill 'er up, and wasted a half-gallon.

Half of our people are off scouring the local disaster areas looking for volunteer work—and mostly getting pushed out of the way as tourists. Everybody and his

the way as tourists. Everybody and his brother is out volunteering but nobody seems to volunteer to organize the volun-teers, which is the way the luman species operates when things happen too fast! The other half of us, including yrs tly, are getting about our own private business in a half-hearted way, (who knows when this will get through to Outside) fighting desperately against the feeling that we ought to be Doing Something, that our regular tasks somehow have shrunk down to utter insignificance—when in our hearts we know perfectly well that the world must and will go on again, including Audio and hi-fi, and that if we are really needed (and things get organized) we won't have to volunteer;

we'll be called upon but quick.

The day after the big rain, I went to the local Village to survey the damage. Amazing. Our railroad's main line was hanging in the air over numerous vast and rocky caverns; the butcher shop had been washed down the main street, which was a narrow strip of hard-top flanked by two enormous gullies ten or fifteen feet deep. The covered bridge, normally fifteen feet above sluggish water, was awash in an unbelievable tor-

rent of yellow flood that moved by solidly like oil at a prodigious speed. The local stream, coming down the mountain, had boomed a thousand times normal, washed straight through the slope of the town taking all with it, leaving cars sitting in garages that towered over strange preci-pices where the front drive ought to be. But enough—the funny thing was that (a) it never occurred to any of us that this was more than OUR flood, that anybody outside the town had been hit, and (b) it also didn't occur to anybody, that early morning, to do anything but chat and stare and kibitz. Human injury is what brings out the volunteers quick; we had no injuries, and the old people had been moved out of the flood on chairs during the night to safe ground. So everybody went around exchanging gossip (local) and taking pictures. A festive air.

tures. A festive air.

Then, come the next day, things began to happen. That is, crowds of would-be helpers turned up, trucks by the dozen, state highway-men, forestry men, town officials, and most of the populace, plus the guests who were going to have to stay around awhile before getting back to the Big City. Immediately, a table was set up with a sign saying REGISTER HERE and everybody went at registering for service with a fine show of cooperation. But, for those of fine show of cooperation. But, for those of us who owned merely our own hands and feet plus, perhaps, a shovel—feeble instrument in this day of machine power—there was agonizingly little to do. Pick up loose branches, bottles, pebbles, move them from here to there, shovel sand ineffectually into a vast ten-foot hole that would take a solid year of hand-shoveling to fill up, untangle somebody's wire fence from a couple of tons of mixed branches, garden flowers, and rotting leaves. A gang of five or six spent all morning hoisting an uprooted septic tank onto a truck and out of the way to a dump heap-only to be told that it was too valuheap—only to be told that it was too valuable to junk and they'd better put it right back where they found it, which they did. Another gang happily sprayed water from a hose on a truckload of cans of beer, rescued from the stream. They didn't bother to wash all the nud off and so a group of aident ladies inside a store wiped away at it with vast numbers of paper towels, displaying commendable energy but not much playing commendable energy but not much organization! And so it went,

Earlier in the day we had signed up for a dozen displaced persons and were warned, ominously, that thousands were being evacuated from other towns nearby and we might have to take on many more. We worked up a fine head of steam over this and were all set to turn our homes inside out if it would help; but we haven't heard a thing since. Not a word. Said they'd contact us when the moment came. And here I sit. a couple of days later, wondering where all the evacuees went. Nobody knows.

The radio still says the situation is desperate and help is urgently needed nearby;

a crowd of young people set off in our truck early in the morning and haven't been heard of since. But a few practical-minded telepolite thank you—no help needed right now and please keep off the roads.

And so, back to work. It's a beautiful day, never so lovely, and you'd never know a thing had happened.

2. Ampex Stereo

My old interest in anything two-channel—whether for sight or for hearing—is as strong as ever. I took a couple of rolls of color-stereo flood pictures the other day, between times, adding to a stereo library that began, believe it or not, when a rich and elderly lady patroness of my boyhood school, noting that I was selling homedeveloped postcards of school vistas to the other pupils, presented me with an enormous and expensive stereo camera that she had somehow acquired in Germany and didn't know what to do with. That was 1927! I used its two "channels" alternately, for awhile, and got twice as many pictures. (It took the largest size roll film available.) But eventually I tried a few two-channel photos, and that was that. Been at it ever since, and my latest is stereo projection, complete with glasses. Biggest audience to

Thus two-channel sound, when it first began to be noised about in the new tape form, intrigued me immediately. As ancient readers of this mag will remember, I went clean overboard for the initial taped "bin-aural" demonstrations, perhaps a bit more than I now wish I had. Later on, after more and bigger 'binaural," I had to backwater fairly strenuously. And my year of on-and-off experimenting at Washington University in St. Louis taught me a lot about what's good and what isn't in the way of "binaural" (with loudspeakers), now bet-

ter known as stereophonic.

And so Ampex's announcement of a new stereophonic tape phonograph had me very much interested, backwater or no. I went, I saw, I heard—and I was impressed, where saw, I heard—and I was impressed, where a good many earlier two-track demonstrations have left me with a strictly "so what" feeling of impracticality. The Ampex 612 stere-phonic system is, I'll venture to say, the first really practical and down-to-earth form of two-channel sound to be offered for the home market. Not the gadgeteers' market and the wealthy buy-everything-new market. The plain, ordinary home market, the market that is looking for musical the market that is looking for musical values. And this even though the basic system costs some \$700 complete.

Paving the Way

Yes, I agree that there have been many two-track sound developments of interest in the three years or so since "binaural" burst upon the audio world. Useful ones, too, that did much to pave the way towards whatever is now upcoming. But I am inclined to put them in a class that we might

call, with all due respect, contributory.
"Binaural" amplifiers, for instance. Aggood development and an inevitable one, as soon as the very idea of two-track sound began to percolate. But the double amplibegan to percolate. But the double amplifier is only part of a home two-channel system, incomplete. And, as is usually the case, those first double-channel amplifiers were fairly expensive, not for their own value but simply because, after all, they were double, with complications. They work, and you can use them with any new two-channel developments, including the Ampex 612. Similarly, there have been two-channel tapes on the market for a year or so—a few.

not many. Prohibitively expensive (almost

DO YOU LIKE TO WASTE MONEY?

CAN YOU AFFORD TO THROW MONEY AWAY??

If not, you should know about High-Fidelity House.

- 1) Have you ever wondered which amplifier and tuner were really best for your needs? Some dealers and distributors will recommend whatever yields the highest profit. Others try to promote their slow-moving items and their overstock. But at High-Fidelity House we have tested every worthwhile audio component on the market, and we will tell you quite honestly what is best for your needs, giving the advantages and disadvantages of each piece of equipment you may have been considering.
- 2) Have you ever bought an amplifier, tuner, or changer, and found when you hooked it up that it wasn't working properly? High-Fidelity House makes complete tests and careful adjustments on every single component at the time of sale.

We feel that this is perhaps our most important service, since our engineers find that almost 40% of all units received can be measurably improved with a bit of attention, some, of course, require hours of painstaking adjustment before they will perform at the best.

Should you wish confirmation of our findings in this matter, you may refer to Page 35 of the March issue of High Fidelity Magazine. Then you will understand why the Service Department of High-Fidelity House checks each unit so carefully, often spending five or six hours on a single order when necessary, and always at no cost to you.

- 3) Have you ever bought high fidelity equipment and realized almost instantly that it wasn't what you wanted? High-Fidelity House unconditionally guarantees complete satisfaction or a full cash refund.
- 4) Have you ever bought a high-fidelity component and wished a few months later that you could turn it in on something better? High-Fidelity House has allowed as much as 100% trade-in value on units purchased from us.
- 5) Do you wonder why we run our business in this way? Frankly, because it pays! We have, in three years, become one of the largest high fidelity dealers in all the West, indeed in the entire world. Since there are hundreds of dealers and distributors selling the exact same equipment at the exact same price, our success must be due to our policy of concentrating on customer satisfaction.

There's certainly nothing new in saying "the customer is always right", but how many businessmen really believe it? We do, here at High-Fidelity House. We realize that by cutting corners, or by taking advantage of our customers, we could probably make a few more dollars on each sale, but if we did, you would find it out sooner or later, and what would you think of us then? What would you tell your friends about us?

You see, we just can't afford to have a dissatisfied customer, so we bend over backwards to treat you fairly, and it works out wonderfully for you and for us, since 85% of our business comes from satisfied customers who tell their friends about High-Fidelity House. After all, if you have a high-fidelity system that gives you pleasure and satisfaction, you will use it many hours each week, and if you feel that we've treated you well, you'll have no hesitation in recommending us. It's as simple as that, and so our business grows and grows.

Would you like to know more about High-Fidelity House? Would you like to obtain some valuable information which will save you money and perhaps protect you from costly mistakes? No matter where you buy your audio components, you will benefit from the information contained in our Bulletin G—over 5000 words, covering many topics which have never before been discussed in print. Yet this valuable bulletin is absolutely free. We'll be glad to send you a copy if you will write your name and address on an ordinary postal card.

HIGH-FIDELITY HOUSE

Dept. AE510, 536 S. Fair Oaks, Pasadena, Cal., RYan 1-8171

ELECTRONIC ENGINEERS

A pioneer company has several openings for Electronic Engineers experienced in the field of microwave and servomechanisms, or magnetic recording and design of audio and video circuits. Originators of the pay station telephone and leaders in business machines, including the Gray Audograph, we offer dynamic opportunity for self-expression and growth in one of Connecticut's finest environments for work and family living. Resumes held in strict confidence.

Write directly to: Personnel Director

GRAY MANUFACTURING CO.

16 Arbor St.

Hartford, Conn.



NOW REVISED AND UP-TO-DATE:

The book that shows you how to enjoy high fidelity at great savings . . .

HOME MUSIC SYSTEMS

CHAPTERS LIKE THESE TELL YOU ALL

- HIGH FIDELITY
 A complete explanation
 of what it means
- WHERE TO GET IT
 The Radio Mail-Order
 House: Mail Consultation; The Locat "Audio"
 Store or "Sound Salon";
 The Custom High Fidelity Builder
- · AMPLIFIER AND CONTROLS
- . THE SPEAKER AND ITS ENCLOSURE
- HOUSING THE SYSTEM Shelves and Tables; Rules To Stick To; Ready-Made Furniture
- EXPANDING THE HOME SYSTEM Radio and TV; Tape; Refinements for the Perfectionist
- CHOOSING A SYSTEM Specific Data on Systems from \$60 ep
- . IF IT BREAKS DOWN

PLUS detailed appendices on mail order firms with available catalogues; locations of radio and Hi-Fi supply houses; Custom builders; selected books and publications specified data on load resistances for magnetic cartridges.

HOW TO BUILD AND ENJOY THEM

By EDWARD TATNALL CANBY. This popular guide to high fidelity, long the standard work in the "hi-fi" field, has now been completely revised to include the big developments of the past two years. Still the only book to cover the building and maintenance of inexpensive home music systems, it shows you how you can enjoy finer musical reproduction, as well as better radio and TV reception, at a total cost of less than \$200.00!

EASY-TO-FOLLOW, SIMPLE DIRECTIONS AND DIAGRAMS

In this amazingly clear book, Mr. Canby, record columnist for Harper's and Audio Engineering, explains how a radio phonograph works; tells where to buy the individual parts, how much they cost, and how to house them for superior sound reproduction. He tells you how to test tubes, repair connections, and quickly locate the sources of breakdowns. He also appraises in detail the ready-made phonographs advertised by manufacturers as "high fidelity."

By far the most complete book on the subject ever published, Hom. Music Systems gives you everything you need to know about building "hi-fi" music systems for greater enjoyment of your records and radio music, at a low cost that will surprise you. With 12 pages of photographs and diagrams.

RADIO MAGAZINES, INC., Book Division P. O. Box 629, Mineola, N. Y.	
Please send me copies of HOME MUSIC SYSTEMS	
I enclose check ☐ money order ☐ for \$3.95 each	
Name	
Address	
City Zone State	

four times the cost of the same sound on a single-track LP disc) and, again, only part of a system—for you must have a player to play them, after all, as well as a double amplifier and double speaker. The painful bifurcation between "staggered" head and "stacked" head two-track tapes has only made things more involved and more expensive.

"Binaural" speaker systems have been offered too, contributing another aspect of this paving-the-way operation, systems like the Bozak with two speaker channels facing away from each other out of one cabinet, the sound reflected forward via side-wing doors. A good experiment and these speakers, of course, can be used for single-channel, two-speaker reproduction too. But here again is an expensive and isolated unit, only part of a home stereo system. A contributory development and, like the others, perfectly good now and for the future, but not a fundamental, complete, new arrangement for the home.

Yes, there have been "binaural" discs, too, and paired pickup systems (with the usual double amplifier-speaker requirements) to go with them—a more dubious development as I see it and one that is per se an interim step, not a final solution to the problem as far as discs are concerned. Similarly, there are the "binaural" FM-AM tuners that can receive both types of signal simultaneously, sending the few available "binaural" broadcasts via FM and AM through the dcuble home system. This, too, seems to me a dubious proposition and an interim step, that must eventually be superseded by a better arrangement (such as FM multiplexing) if two-channel broadcasts are to become important.

It is really quite remarkable how these various two-channel developments share a certain pioneering aspect of impracticality and mutual isolation, a certain similar degree of, to use my favorite newly-coined word, interimity. They represent a typical phase of a new movement, through which we inevitably seem to pass. Reminds me of the early post-war days when "hi-fi" equipment came in hopelessly non-standardized units, every amplifier with its own plug system or none at all, when cartridges lacked preamplifiers, preamplifiers lacked uniform equalization, and nothing ever had a simple power cord attached.

And so, as of this last year, it has been quite possible, though expensive, to rig up a very fancy home two-channel system from the various components available here and there. A fair number of enterprising gadgeteers—the kind who bought the ballpoint pen at \$13—have got themselves "binaural" or stereophonic (take your pick) set-ups, playing the few two-channel tapes or making their own, tinkering with two-channel discs and/or two-channel broadcasts, when and if. But these systems have cost a pile of cash. And, when you come down to it, unless you have been making your own two-track tapes there really hasn't been very much to play on them. If I am right, RCA's first tape release contained just one two-channel tape. (Maybe it was two.) And how many LP record releases does RCA put forth in a year?

So, you see, two-channel music, whatever its eventual merits from the home viewpoint, hasn't been practical at all in terms of availabilities. About as practical, so far, as home color TV. At least, until now.

Yes, as some readers are clamoring to remind me at this point, there have been some actual complete two-channel home systems on the market. I looked, for example, at the Allegro "Symphonic" console at last year's Audio Fair, including a two-channel tape system, built-in, and two

speaker systems, one at each end with the angled wing-door reflectors mentioned above. Complete, and reasonably practical. Two-channel tape players have been of-fered, too in connection with some of the new tape libraries featuring announcements of two-channel tape, such as the Audiosphere "Bi-Fi" player unit at only \$100.

But, again with all due respect, I suggest

that these are still in the pioneering, pavingthe-way, contributory class. First, they are essentially enterprising, torward-looking adaptations of existing equipment. (Allegro used a Pentron tape unit, if I am right) rather than fundamentally newly designed systems. No criticism intended! We are always in debt to those who barge ahead quickly to offer new-type facilities, making use of whatever is at hand for a rapid advance into undeveloped territory. Remember the first two-speed and three-speed changers? Adaptations all, but they were available quickly and there wasn't anything bet-

And secondly, I doubt if these two-track home systems have achieved anything like a large national distribution. I doubt if they were intended to. Instead, they are path-breaking models, for the few, but designed to open up new interests and, of course, new sales possibilities. Good. Pav-

ing the way.

I should mention, finally, the sort of hi-fi quality record-playback equipment that has been available for two-channel work, to give a better idea of the background into which the new Ampex 612 tape stereo phonograph fits. To my knowledge, no high-quality playback-only unit has been available; the record-play combination has been standard, and costs money. The Concertone models, with easily juggleable heads, have models, with easily juggleable heads, have been available in this form at perhaps the lowest price for professional or "hi-fi" quality, around \$500 and up, and Magnecord's "Binaural" Magnecordette, home adaptation of the Magnecorder, sells for a similar price, around \$550. This, remember, does not include dual speakers or dual power amplifiers. The big, professional Magnecorder two-track job is up in the \$850 range and the Ampex stereophonic model, with the more modern "stacked" two-track single-unit head, costs a cool \$1953. You can have that one with three tracks for a

can have that one with three tracks for a mere \$2514! So, you see, this has been no chicken-feed hobby. Millionaires love it.

I received one taped stereophonic fanletter from a gentleman, the head of a steel company, who had two of everything you could imagine that costs big money. played his tape on a mere \$600 one-track-ata-time machine and wrote to him that I was sorry. I wouldn't be able to get the stereo effects about which he talked. ("Now I'm walking towards the right-hand Telefunken mike, thump, thump, thump, and now I'll move over to the left-hand one—can you hear the difference?") Natch, he had the Ampex Stereophonic recorder, the \$1953 item, two elephantine speakers, amplifiers, and a room to match, or so I judged from the one half of his tape I could hear. His mike technique wasn't much but his enthusiasm was the real hi-fi McCoy. Even went out and shut off the refrigerator and the furnace, to achieve Absolute Silence for his recording. That was two-track home music, as of last year


The Smaller The Better

And now-the Ampex 612 system. I'll put off a detailed discussion of its effectiveness until I've got one in my home. But I saw and heard enough in the preliminary demonstration to convince me that this really is something new

First, the machine is "hi-fi" and no com-(Continued on page 108)

Hi-Fi and Hi-Price aren't Siamese Twins

THE NEW IMPORTED Fentone His IS OUT TO PROVE THIS TO YOU. NOW YOU CAN GET PROFESSIONAL FEATURES YOU ALWAYS WANTED - AT PRICES YOU WILL GLADLY PAY.





RECORD CHANGERS ARE PREFERRED BY OVER 85% OF THE

Long professional type pick-up arm with plug-in shell to American standards • World's best shaded 4-pole phono motor • Factory tuned spring suspension double chassis • Practically free of rumble and acoustic feedback • Mutling switch • Automatic shutoff • Two spindles — long for changer and short for manual player use • Many other features and models.

45 RPM Automatic Spindle (ADD.) Net \$3.50

NEW Fentone 6 350 LO-Z PROFESSIONAL MAGNETIC CARTRIDGE

Works on any load over 1000 ohms • 30 mV/4.4 cm/sec. output, due to 8-poles • Highest 5x10-6 cm/dyne lateral compliance • Response 20—16,000 cps latd ± 2 db then gradually rising to over 20,000 cps.

ac.op.	ilo itet.	
B&C	Reversible, Silver Label (2 sapphire jewels)	.95
B&C	Reversible, Gold Label (1 diamond, 1 sapphire)\$19.	.95
B&C	Single, Silver Label (1 sapphire Jewel)	
R&C	Single Gold Label (1 diamond lewel) \$18.	.95



THE NEW MINIATURE Fentione BLUE RIBBON STUDIO TYPE VELOCITY MICROPHONES, TRULY PROFESSIONAL MIKES AT INCOMPARABLE LOW PRICES.

**RESLO" DUAL IMPEDANCE MIKES — PROPER IMPEDANCE SELECTED BY PLUGGING IN PROPER CABLE. • Shockproof miniature duraluminum ribbon with no audible resonance. • Response 30 — 15.000 cps ± 2 db. • Bi-directional pattern easily changed to directional or close talk by use of internal pads. • Triple blast screening. • Sensitivity —58 db. "B&O"-50 a BI-DIRECTIONAL MIKE WITH CHARACTERISTICS SIMILAR TO THE RESLO BUT WITH EVEN GREATER SENSITIVITY, INSTEAD OF PADS IT HAS A 3-WAY SWITCH: "T" (Close talk); "M" (music) and "O" (off).

CELESTE

Reslo "Celeste" 30/50 ohms and Hi-Z with muting switch — Audiophile Net \$48.95 Reslo "Symphony" 250/600 ohms (no muting switch) — Audiophile Net \$48.95 B80-50 50 ohms impedance — Audiophile Net \$48.95

Ten-tone MOTER KS TAPE DECK

Driven by three AC motors. • 7½ lps speed, dual tracks. • 3¾ ips conversion pulley available. • All-electrical push-button switching and braking. • Frequency response better than 50 — 10,000 cps. • WOW and FLUTTER less than .3%.

ten-tone TPR-1 TAPE PREAMPLIFIER

Blas frequency 50 — 60 kc, adjustable. • Signal to noise ratio: better than — 55 db. • Power supply on separate chassis. • High impedance than — 55 db. • Power Supply on Separation (1 volt) output.

Audiophile Net: \$39.50 — In prefabricated kit form: \$34.50

THE NEW LARGE MOTEK K7 2-SPEED UNIT WILL SOON BE AVAILABLE ALSO



TPD-TODE "BRENELL" HI-FI TAPE DECK



A FOOLPROOF 3-SPEED UNIT FOR LIFETIME USE.

A FOOLPROOF 3-SPEED UNIT FOR LIFETIME USE.

• Three speeds:

• Three speeds:

• Three speeds:

• Frequency Response:

• Double 1 hour

• Three independent AC motors, • Dual tracks — 7" reels.

• Playing Time:

• Three independent AC motors, • Dual tracks — 7" reels.

• Positive interlock of all switching and braking mechanisms, including automatic pinch-roller and pressure pad assembly.

• Instantaneous mechanical braking.

• Simple two-knob operation: The left for "Fast Forward" and "Off." • WOW and FLUTTER less than 2%.

• High fidelity heads have mumetal shields for hum-free operation. Hi-Z Record/Playback head with adjustable azimuth, ideal for all makes of pre-recorded tapes.

• Heavy Duraluminum base plate 15" x 11½".

• Highest quality Audiophile Net \$79.50



ATTENTION PRERECORDED TAPE USERS Our PRO-2 Hi-Fi Pre-amplifer for Motek and Brenell decks featuring 3 independent equilization curves is now also available.

All prices slightly higher on the West Coast.



15 MOORE STREET NEW YORK 4, N. Y.

NEW PRODUCTS

• Cutter-Splicer. Designed for repairing and editing computer, industrial and special purpose tapes, the new Robins cuttersplicer is available in models for handling tape ranging in width from one-quarter to one inch. The device houses a knob-controlled, moveable, cutter carriage which mounts three replaceable blades. With the knob moved to the back of the unit the recording tape in the guide is cut diagonally. With the knob moved forward the

• VU Meter. Developed as part of the recently introduced Marlon Medalist line of panel instruments, this new two-inch meter features clear Plexiglass case construction which results in virtually shadow-free illumination by admitting light from the top and bottom as well as

e Improved Thorens Becord Players. Many improvements are inherent in the new Swiss-made changers and turntables recently introduced in this country for the first time by the Thorens Company, New Hyde Park, N. Y. As opposed to earlier models in which speed reduction from 45 to 33-1/3 rpm was accomplished by braking action on a governor, the new models are powered by a direct-drive motor which utilizes a separate gear for




splice is trimmed parallel to the tape with a "Gibson girl" shape—two concave cuts made in the tape edges. Tape ends to be spliced are held in the tape guide by pressure fingers. The unit is mounted on a heavy cast base for bench use, but may be removed from the base and mounted directly on a recorder. Manufactured by Robins Industries Corporation, 41-08 Bell Blvd., Bayside 61, N. Y.

• Electronic Carillon. Production of the true tones of Flemish tuned hells is achieved electronically in the "Flemish Master" electronic carillon recently announced by the Stromberg-Carlson Company, Rochester 3, N. Y. Not only does the instrument produce Flemish bell tones, but the carilloneur can change the tones to those of English-type electronic bells, or to chimes, simply by turning a knob on the



carillon console. The "Flemish Master" has 25 tone bars, giving it a range of two full octaves. Rolls similar to those used for player pianos, providing a wide selection of hymns and familiar classics, are available. When installed in conjunction with a pipe organ, the instrument can be connected directly with the organ console and played from the same keyboard. In such an installation it can be played either in harmony with the organ, or separately. The playing mechanism of the "Flemish Master" is contained in a metal cabinet 31" i × 37" h × 13" d. Weight is 100 lbs. It is designed for either floor or wall mounting.



from the front. Designed for precise indication and measurement of audio frequency voltages in broadcast, recording and hi-fi applications, the meter meets the latest A.S.A. specification for "volume measurements of electrical speech and program waves." Complete data on the MM2YU meter are available from Marion Electrical Instrument Company, Manchester, N. H.

e General Radio Z-Y Bridge. This instrument is unusual in the fact that it can be balanced for any impedance connected to its terminals. From short circuit to open circuit, real or imaginary, positive or negative, a bridge balance can be obtained with ease. Nominal accuracy of the Type 1603-A bridge is 1 per cent over the frequency range from 20 to 20,000 cps. Readings are direct. Measurements may be taken of impedances which are grounded, ungrounded, or balanced to ground. An audio generator and null detector are required for use with the instrument. In addition to the obvious measurement of R, L, and C components, the Z-Y bridge is




useful for measuring the impedance-frequency characteristics of such devices as electro-acoustic transducers, capacitors, transformers, and filters. Manufactured by General Radio Company, 275 Massachusetts Ave., Cambridge 39, Mass. P-12



each standard speed. Operating convenience is enhanced by the adoption of a dialaction control knob for selection of the three standard speeds. Concentric with this dial is a fine-tuning knob which permits speed adjustment as much as 5 per cent above or below standard. For easier installation all of the new Thorens units are equipped with permanently attached shock mounts. Among improvements in the new Thorens Model CD-43 record changer, illustrated, is a provision for manual operation. Further information is available on request.

e Portable Speaker Enclosure. Equipped with a concealed carrying handle and weighing only 20 lbs, a new popular-priced speaker enclosure designed especially to provide durability for outdoor use has been announced by Manfred Wood Products Corporation, 226 New York Ave., Huntington, N. Y. The unit combines colorful cabinetry with a fully-insulated



bass-reflex speaker compartment. Exterior finish is of Conolite, a laminated plastic veneer. Fiberglas insulation is provided on both sides and top of the speaker compartment which is for use with 8- or 12-in. cutouts. A Fiberglas curtain is also used for elimination of boominess. Dimensions are 22" hx16" wx12" d. P-14

e Fisher Audio Control. Virtually every feature which could be desired in affording audio control of a high-fidelity music system is incorporated in the new Fisher Series 80-C Master Audio Control. Although it permits flexibility of control which is normally encountered in professional studio consoles, the self-powered 80-C is remarkably simple in operation. Among its features are included mixing and fading facilities for from two to five channels, tape input for operation directly from tape playback head, sixteen combinations of phonograph equalization, a calibrated loudness-balance control, and pushbutton channel selectors which, in addition

42

HARVEY the House of Audio



MAGNECORD

M81 Series

Portable TAPE RECORDER

The basic tape transport mechanism operates at 1.5 and 7½"/sec. A switch is used for speed selection, Other cantrols are push-button operated. Accommodates reels up to 10½". Frequency response at 1.5"/sec. extends from 40-

15,000 cycles $\pm 2 {\rm db}$. Employs 3 heads: erose, record and playback. In 'record' position playback head serves as monitor.

Separate record and playback amplifiers are available thus permitting simultaneous monitoring from tape. Record amplifier has high impedance, unbalanced microphone input and unbalanced bridge input. Balanced 50 ohm mike input and balanced bridge input available through use of optional plug-in transformer. Meter is provided for bias, record and playback. Has cathode follower output. Optional plug-in transformer provides balanced 600 ohm output.

000 011111		2032°°
M81-A	Recorder Mechanism in portable case	
M81-AX	Same as above but less case, for rack mounting	575.00
91X1552	Case only for recorder mechanism	62.50
	(with blower assembly)	
M81-C	Record/Playback Amplifier in portable case	245.00
M81-CX	Same as above but less case, for rack mounting	225.00
81D50	Case only for Record/Playback Amplifier.	28.00
M81-AC	Recorder Mechanism and Amplifier combination in	
MOI-AC	portable carrying case	870.00



COMPONENTS Professional JURNIABLE

A high quality record turntable with ex-A high quality record unitable with ex-tremely low rumble and wow content. Employs a constant speed, shielded induction motor, double shock-mounted to isolate vibration. An endless fabric belt drives the turntable directly from the motor shaft. Speed change is made by placing the endless belt on

The turntable itself is a 25-pound steel disc with a polished steel shoft riding on a ball thrust bearing. An expanding spindle is used which outomatically centers the record. The entire turntable assembly is mounted on damped coil springs to absorb floor and cabinet vibration. The table provides ample room for mounting a pickup arm.

\$9950 Blande or Mahagany 15.00 Base Skirt (as shown in illustration).



REL Precedent FM TUNER

Unquestionably the finest FM tuner ever made. This successor to the famous 6468 incorporates every important advance developed in the art of FM reception. Sensitivity is 2 microvolts for better than 40db quieting. Frequency response is 30 to 40,000 cycles ±1db. Waveform distortion is less than .5% for 100% modulation. Provides 2-volt output to high impedance, and .2 volts to 600 ohms. Front panel includes slide-rule dial, tuning meter, signal strength meter, tuning control, radio frequency and audio gain controls, and power switch. Power supply is self-contained. Supplied complete with tubes.

Chassis only (for custom installations).

\$325.00

.335.00 Relay Rack Model. Cabinet Model (Mahogany, Wolnut or Blonde)... 360.00

Printed-Circuit "Preamp with Presence" Miniaturized

The complete kit of parts, including the basic kit and all other parts and tubes as specified by author. With complete, simplified instructions. \$35.50

NOTE: Prices Net, F.O.B., N.Y.C. Subject to change without notice

ESTABLISHED 1927 RADIO COMPANY, INC. 103 W. 43rd Street, New York 36 • JU 2-1500



New! ALTEC

HIGH FIDELITY UNITS

A-440A PREAMPLIFIER - Three

high-level and two low-level inputs, equalized or flat. Main amplifier and recorder outputs. At 1 KC with tone controls flat, gain is 60 db an phono (low level, equalized), 63.5 db on mic. (low level, flat), and 26 db on TV, tape, or rodio (high level). Frequency response is flat from 20 to 20,000 cps. Noise level is better than 95 db below 1.5 valts output. Seven controls, 3 AC receptacles, self-contained power supply.

In mahogany or blande cabinet.

In mahogany or blonde cabinet.

A.340A AMPLIFIER — 35-watt output with less than 0.5% total harmonic distortion. 66.5 db gain. 1.3 valt ms input sensitivity for 35 watts output. 200,000 ohm input impedance. Frequency response 5 to 100,000 cps within 1 db. Noise level 95 db below full output. Load impedance 8 and 16 ohms, adjustable from —4 to +4.5 ohms on 8 ohm tap, less than 52 ohms on 16 ohm tap, with damping factor of 35 on 16 ohm tap and 1.8 through infinity to —2.0 on 8 ohm tap, Gain and Re adjustment controls. and Rg adjustment controls.



\$15900

The New ACOUSTIC RESEARCH AR-1 SPEAKER SYSTEM

Revolutionary acoustic suspension system provides a bass response hitherto unablainable. At the same time, this is accomplished with a speaker cabinet only 14"x11%"x25" AR.1 with 12" woofer and 8" mid-ond-high frequency unit

\$18500 in finished cabinet

AR-1U same as above in unfinished cabinet AR-1W woofer only in finished cabinet. AR-1WU woofer only in unfinished cabinet. \$172.00 \$145,00 \$132,00



LEAK 🛌

Dynamic PICKUP ARM & CARTRIDGE

Minimum inertia and friction. Provision for plug-in interchangeable heads. Coil impedance 6 ahms at 1000 cps — distortion-free because no magnetic core is used. Diamand stylus and arm rest provided. Lower record and stylus wear than any other pickup. Frequency response independent of femperature 40 to 20,000 cps ±1 db. 11 mV output for each cm/sec. rms recorded velocity easily loads amplifier with a sensitivity of 40 mV at 1000 cps by the pickup from commercial records.

Arm with moving-coil pickup for microgroove (331/3 and 45 rpm) records with diamond stylus installed and matching transformer. Moving-coil pickup only, with diamond stylus for standard (78 rpm) records -less arm and transformer-



THORENS **CONCERT CD-43**

Three-Speed Record Changer

Intermixes 12", 10", and 7" disks. Repeat control replays ony record size.

Pause-and-Reject Control allows immediate record reject and adjustable pause between records. Automatic last-record shutoff and muting switch assure noiseless changing. Candenser blocks switch-to-upeaker noise. Easily adjustable processing weight weer. With pre-assembled shock mounts and switch for semi-manual operation.

\$9375

HARVEY SHIPS EVERYWHERE. Use this handy coupon -

	RADIO CO., Dept. p the following		13rd St., New York 36, N.Y.
	check money charges. Unused surplu New FREE High I		including estimated anded. og T PLAN
NAME		**********************	
ADDRESS.			
City	- avlanda summer	Zone	State



the new Rauland model 1811 full 12 watt high fidelity amplifier

NOW, at moderate cost, you can own and enjoy a quality of musical re-creation virtually indistinguishable from the original performance. Here is the ideal "heart" for your home music system, capable of reproducing the full musical range from vibrant bass through thrilling treble with the full emotional depth and meaning of the original music. Here is the finest audio achievement, designed to bring you the ultimate in enduring listening pleasure.

with every desirable feature for superb musical reproduction...

• Full 12 watts output • Response, ± 0.5 db, 20-20,000 cps. • 3 Response Curves to bring out the full fidelity in all types and makes of records • Micraphone input for entertainment and recording • Separate Bass and Treble tone controls • Choice of regular or "equal loudness" control • Inputs for GE or Pickering cartridge, tape, tuner, and microphone • Removable panel for easy mounting...

PLUS every other desirable feature to create a new dimension



Hear the
RAULAND 1811
Amplifier at your
HI-FI dealer, or write
for full details.


RAULAND-BORG CORPORATION
3515 W. Addison St., Dept. G. Chicago 18, III.

to selecting audio input channels, also control a.c. power to auxiliary equipment. Seven inputs are provided, including a separate high-gain micrephone preamplifier. Bass and treble controls are of



the variable-crossover feedback type. Frequency response is 10 to 100,000 cps and hum and distortion are reduced to negligibility. Descriptive sheet is available from Fisher Radio Corporation, 21-21 44th Drive, Long Island, N. Y.

• Electrostatic Speakers. Available in both rectangular and round types, the new Isophon electrostatic speakers are designed for covering a frequency range of 7000 to 20,000 cps. Special construction of the wibrating membrane assures even distribution of radiated sound. Low cost and



good quality combine to make the line of Isophon speakers of particular interest to manufacturers of radio and TV receivers. Manufactured in Western Germany, they are available in this country from Arnhold Ceramics, Inc., 1 E. 57th St., New York City, N. Y. Complete information will be mailed on request.

• Professional Film Recorders. Designated the Model Sc system, a new line of professional magnetic film equipment has been introduced by Stancil-Hoffman



to answer the need for portable recording facilities which can be operated from either batteries or normal a.c. line voltage. The studio production unit consists of three portable carrying cases, each 10% x 14% x 6 ins. The first contains a two-channel microphone preamplifier-mixer with an announce microphone and buzzer system. The second contains the recording amplifier, playback amplifier, and power supply. The third contains the film transport which has a film capacity of 1000 feet. The S6 system is available for 16 or 17%-mm film. A complete description of


the various camera drive systems for field operation may be obtained by writing Stancil-Hoffnian Corporation, 921 N. Highland Ave., Hollywood 38, Calif. P-17

e Specialized Goodmans Speakers. In order to afford exactness in meeting specific use requirements, the new Audiom speakers manufactured by Goodmans of England are available in a choice of different resonant frequencies. Two models are even provided with simple means for interchangeability of cones, thus permitting selection of a cone whose fundamental resonance most closely matches the needs.



The speakers were designed particularly for public-address and industrial applications, electronic organs, and as bass reproducers in a 2- or 3-way high-fidelity music system. Largest of the Audioms is the Model 90, an 18-in. speaker with power handling capacity of 50 watts. Fitted with an easily detachable cone-coil assembly, a unit may be selected with fundamental resonance of either 35 or 50 cps. The smallest Audiom is Model 60, a 12-in. speaker rated at 15 watts with choice of 35, 55, or 75 cps resonance. Crossover design data and recommended enclosure specifications are available on request. Write Rockbar Corporation, 215 E. 37th St., New York, 16, N. Y.

• Spotlight Socket Wrench Set. Especially handy for working on electronic equipment in subdued light or in complete darkness, a new screw driver and socket wrench set contains a built-in spotlight which illuminates the screw or nut to be manipulated. The shaft on both tools is



hardened chrome steel. The handle, which also serves as a battery case, is of heavyduty plastic. Uses single penlight cell. The socket set comes with six detachable socket heads. Contour Marker Corp., 1843 E. Compton Blvd., Compton, Calif. P-19

RECORD DEALER VIEWS

(from page 32)

some solution to the vexing problem of the defective record-

Our first step was to install a "needle clinic" complete with microscope, the widest assortment of needles, needle literature and so on, and we engaged a needle technician. Talk about needles and their effect upon the performance of a record was not enough. It was necessary to prove that a needle was good or bad, and that a faulty needle was the cause of faulty play back. Equipped with a microscope, this single technician (today we employ three such pecialists) went on to prove conclusively to our customers that here was the solution to faulty record reproduction.

Handling Complaints

A defective-record complaint was handled in the following manner. First, a test laying on the hi-fi phonograph installed ust for this purpose-actually this machine s an ordinary record player having no special gadgets which might make it benave differently from any other player. If the record played to the customer's satistaction, as was predominantly the case, he was then taken to the needle department where the technician attempted to ascertain he type of needle he used and the time of actual usage. After consultation, many cuscomers were willing to admit that their needle had been used far beyond its useful life and they were willing to purchase new mes. Others stubbornly refused to accept the technician's explanation and only grudgingly consented to a microscopic exunination of their stylus. Many of those who bought new needles came back and gratefully admitted that the records which did not play properly the day before, played perfectly now. Those who brought their needles in for inspection were shown the culprit under the microscopic and were orced to admit that the jagged point certainly looked unlike a new needle. Defective-record complaints decreased sharply, out the complete solution was not yet at rand

Our next idea was to determine the aseful life of the various types of needles under actual playing conditions. We devised a simple series of tests which would, mee and for all, controvert such fancy Jescriptions of a stylus as being "long life," "everlasting," or "permanent." We had to have black and white proof which could be understood by all our customers, even the most uninformed.

For seemingly endless hours, various styli—osmium, sapphire, and diamond, were played. About 150 osmium needles and well over 250 sapphire needles were used in this research and no major needle manufacturer's product was omitted from these exhaustive tests. Even though a diamond point was considered the best of all phonograph needles, we questioned this fact, since hearsay evidence was not sufficient. We sub-





MODEL 59-LF OSCILLATOR UNIT Frequency Range: 100 Kc to 4.5 Mc. Price - Oscillator Unit (Head) only \$98.50



MODEL 59 OSCILLATOR UNIT Frequency Range: 2.2 Mc to 420 Mc. Price - Oscillator Unit (Head) only \$98.50



MODEL 59-UHF OSCILLATOR UNIT Frequency Range: 420 Mc to 940 Mc. Price - Oscillator Unit (Head) only \$123.00



The Power Supply is a compact, lightweight portable unit consisting of a full-wave rectifier with voltage regulator tube—designed for use with any of the oscillator heads illustrated.

PRICES:

Power Supply only \$75.00

Model 59-LF Head with Power Supply \$168.00

Model 59 Head with Power Supply \$168.00

Model 59-UHF Head with Power Supply \$198.00

Prices FOB. Boonton, N. J.

Measurements' Megacycle Meter is now available in a choice of three oscillator heads providing frequency range coverage from 100 Kc to 940,000 Kc. Thus, the utility of this versatile instrument has been extended, making it, more than ever, indispensable to anyone engaged in electronic work; engineer, serviceman, amateur or experimenter.



THE . . . anthoritative source of comparison data

AUDIO . . . equipment reports with all facts, good and bad

LEAGUE . . . for consumers and users of equipment

REPORT . . . on scientific laboratory, and panel listening tests

ONLY \$1 - SPECIAL TRIAL OFFERS - ONLY \$1

a. CARTRIDGES: Complete with comparison data, frequency response curves, and results of panel listening tests on all leading hi-fi cartridges.

Issues 6, 7 & 8 cover above, plus test reports on arms and test records—sent for only \$1.

b. ENCLOSURE & SPEAKER SYSTEMS: Complete with comparison data, frequency response and harmonic distortion curves, and results of panel listening tests on the Acoustic Research AR-1 and National Catenoid systems, and Karlson enclosures.

Issues 9, 10 & 11 cover above, plus test reports on tuners and amplifiers—sent for only \$1.

All back issues available upon request. Cumulative index in issues 8, 10, & 12. Twelve issues including either or both of above Trial Offers, \$4. Twenty-four issues \$7. In groups of 3 or more (including multiple years) \$3. per year each. Indicate number of starting issue and mail with remittance to

THE AUDIO LEAGUE REPORT

P. O. Box 55L

Pleasantville

New York

TO HELP YOU SELECT THE CORRECT HI-FI ENCLOSURE Send for this free **AUTHORITATIVE GUIDE** booklet, It contains all the facts you need to select and install the Karlson Enclosur ULTRA-FIDELITY szet enclosure for the discriminating ... the enclosure by which all IDEAS others are measured. KARLSON ASSOCIATES, INC. 1610 Neck Road, Brooklyn 30, N. Y. Please send copy of your latest book "The Karlson Esclosure" to Address. City

jected over 50 varieties of diamond needles to the same series of tests and kept accurate records of all of the hours played and the results of microscopic examination. Consideration was given to the conditions under which these needles would be used, and pickup arms were used on which stylus force could be varied from 2 to 20 grams.

These tests proved conclusively that the term "permanent" as applied to any needle was misleading and absolutely false. We found that the only needle demonstrating any prolonged usefulness was a diamond, and even this was sharply circumscribed by the actual conditions of play. Nevertheless, the useful life of the diamond was fanstastically greater than the other two types. Osmium needles were found to be good for about 15 hours at the most, whereas the widely used sapphire was playable for a maximum of 40 hours before it began to damage the record. The life of the diamond needle fluctuated from 600 playing hours up to 1800 hours (some of my meticulous customers who kept a log on their needles proved that there were occasional cases of diamonds lasting more than 2000 hours when used with a properly weighted and balanced tone arm). However, to the best of my knowledge no one has yet proven that either osmium or sapphire styli were useful beyond the hours indicated.

We found that no needle will function properly under abnormal weight applications. Under certain conditions, stylus forces as low as 21/2 grams were found to be as injurious to a record and needle as were those of 20 grams. The lower force caused needle flutter stemming from an insufficient weight necessary to ensure the needle point riding properly in the groove. The net result was that the unsatisfactory sound emanating from the record was as bad, if not worse, than the same results obtained with maximum force. Within the scope of this test it was discovered that dust particles accumulating on the surface of the record were of sufficient abrasive quality to decrease the life span of both needle and record considerably.

All of the evidence about defective needles was displayed on a series of placards posted about the store and in handbills which were given to our customers. Consumer indifference and even resistance were not substantially reduced, largely because of the misinformation sponsored by certain phonograph manufacturers and sales personnel who created fanciful figures about "permanent" needle life in order to lend finality to a successfully concluded sale.

Manufacturers' Responsibility

It has been our contention, from the very first, that it is the primary responsibility of the manufacturer of phonographs to advise the customer as to the correct time-use of the stylus incorporated in the machine. It is very discouraging to see a brochure, which usually accompanies a new record player, in which the manufacturer blandly states that the stylus included in his machine is "permanent" or has a useful life of a year. This statement could be true if the needle were used for only 15 to 40 hours within the 52 weeks. One of our customers, sensitive to this situation, inquired of a


well-known manufacturer of record players as to the proper amount of playing time is needle should be allowed before replacement would become advisable. The reply, signed by the vice-president of the company, stated categorically that the reedle would give him good service for at least two years. This reply, it should be understood, was given without any question is to the type of needle point used or the mount of playing hours involved within this period.

This type of advice offends as much as loes that of those manufacturers of phonographs who build their 3-speed machines with a one-needle cartridge-one with a "universal" or "all groove" stylus. Obviously, they imply that it is proper to play all speeds of records with this one needle which has a tip radius of 2 mils. They well know that the grooves on an LP and 45 records are designed to play with a 1-mil stylus, and the standard 78 record has a 2.5- to 3-mil requirement. In all honesty, how can the manufacturer reconcile the use of this "all purpose" needle without expecting either damage or improper playback reproduction. Individuals who pur hase these machines are generally lacking in specific technical information and acept as gospel the manufacturer's claim that all types of records can be played with this one stylus. Inevitably these individuals will constitute the preponderance of complainants about faulty record reproduction.

On February 26th of this year, we published, in The Billboard (a trade magazine), a full-page open letter in which we took to task both the record and the phonograph manufacturer. We pleaded the case of the misguided consumer and the tormented dealer and then challenged these manufacturers to reveal the true facts concerning this needle problem. The facts supplied in this open letter were essentially the same is the foregoing statements. The open letter gave further emphasis also to the problem of improper stylus force. All mahines leaving the factory should not only carry the proper stylus but should also be correctly adjusted insofar as stylus force is concerned. That this admonition is necesary is sufficient commentary on the inlifference displayed by certain companies toward this problem. One would hope, at least, that barring factory adjustment, some written instructions to the dealer or the onsumer would be made, advising how any particular tone arm could be correctly adjusted. In this open letter we pointed out he enormous investment the record producers had made in their product and the large expenditures which most of them and made in advertising their records. However, nowhere on the sleeve or the meer liner was there any information informing the buyer that the record he had just purchased was a precision-made commodity and that it was essential to play t back with a 1-mil needle (I believe that only 3 out of 240 record manufacturers do o inform the buyer). No mention is made mywhere of the absolute necessity for laying these records with a perfect stylus. Any statements to this effect, if they do appear on a record, must be in such fine rint that they can be deciphered only with





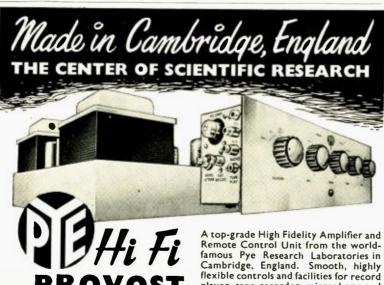

PROVOST POWER AMPLIFIER HF25

PROCTOR

REMOTE: CONTROL UNIT HF25A

player, tape recorder, microphone and radio tuner inputs. Frequency response substantially flat from 2 to 160,000 c.p.s. Infinite damping factor, Intermodulation distortion under 1% at output of

PYE LTD., CAMBRIDGE, ENGLAND

DISTRIBUTORS

U.S.A. BRITISH RADIO ELECTRONICS 1883 JEFFERSON PLACE, N.W. WASHINGTON 6 D.C. CANADA PYE CANADA LTD. AJAX, ONTARIO

the aid of a magnifying glass. Thus it is left to the inexperienced retailer and the uninformed customer to try to discover these facts for themselves.

There are other problems with which our needle technicians are faced. Important among them is the non-uniformity of cartridges which are installed on like machines of a single manufacturer. For example, one machine-let us call it Model X-will come off the assembly line with a variety of cartridges, either Shure, Astatic, or Webster Electric, whichever happens to be available at the time. Each of these cartridges requires a needle of an individual type and none is interchangeable with any other. Thus, when a customer requires needle replacement for a Model X phonograph how does he or the dealer know exactly which needle he requires?

Cartridges

Most cartridges are of simple construction and do not demand any mechanical ability in needle replacement. However, there are still too many cartridges being manufactured upon which even a skilled repairman hesitates to work. The deficiencies of these latter lie mainly in the delicate and involved manipulation necessary before needle replacement can be made. Some require removal of the cartridge from the tone arm; others are of the type in which the needle has been inserted under heavy pressure, so that breakage or damage to the cartridge almost always occurs at the slightest touch, when removing the needle. Faced with all these problems we insist that our technicians educate the record buyer in every-way possible and at every possible opportunity. It is almost as though we were operating a place of learning specializing in the subject of preservation of a valuable record.

Many people who visit our needle clinic do so with an open mind, and are willing to accept our proof that their equipment is at fault. Nevertheless, there are still too many who retain a strong bias and insist that the manufacturer who specified that he gave them a "permanent" needle knew what he was talking about; and that anyway we are just trying to sell more needles. We hear a great deal from this type about the ultra-sensitivity of his phonograph and how it has the intelligence to reproduce properly only the most perfect record. Many of them become very sheepish, however, when their "defective" record tracks perfectly on our equipment.

Having stated the problem, we have found it necessary to employ all ethical means to protect ourselves. The foregoing has indicated some facets of the problem and we must admit that there is not yet at hand the possibility of a solution to satisfy everyone. Aside from talk and demonstration, we include the Sam Goody warranty in every package leaving our premises a guarantee that all records will play perfectly if properly handled.

The long-playing record is still relatively new and has by its outstanding and desirable characteristics proven a boon to the industry. Shall it be allowed now to become a bane? It is the responsibility of the record manufacturer to acquaint the purchaser with the proper playing conditions which must be met for proper reproduction. He should state, without equivocation and as precisely as possible, the useful playing life of the three types of needles. He should advise the purchaser as to the proper type of replacement needle and illustrate simply and learly the right method for replacement. He should also make sure that all machines of the same model and make have uniform cartridges in which the needle can be changed easily and without fear of damage. It may interest the reader to know that there are more than 100 different types of cartridge now in use for which there must be an equal number of replacement needle ypes. Things must be done as simply as ossible so that the layman-customer needs no special mechanical knowledge nor a complete tool box.

BUILDING SIMPLICITY

(from page 52)

control, and to re-route the wire which carries the output of the cathode-follower directly to the "output to tape recorder" jack. One of the "AUX" input jacks may have its wire disconnected from the selector switch, and connected directly to the "loudness" control. New labels should be made, showing this last jack as the "tone control input" or such other language as suits the user. With these wiring changes, the cathode-follower output of the selector switch is connected directly to the input of the tape recorder, whose output is then connected directly to the volume control, tone controls, power amplifier, and loudspeaker. The recorder may then be turned on whenever the system is in use, so as to leed all signals through to the amplifier and loudspeaker, or it may be equipped with a switch which connects its input to its own output whenever the recorder is turned off, so as to be effectively out of the circuit except when in use.

A careful examination of the schematic diagram of any equipment to which a tape recorder is to be connected will usually reveal a point in the circuit where level is high, and not subject to variation with the volume control setting, and a point which has not been subjected to tone control. Usually, this point occurs immediately after the selector switch. If a cathode-follower happens to be in the circuit immediately following the selector switch, so much the better-the output to the tape recorder may then satisfactorily be connected here, rather than directly to the selector switch, provided the volume control was not placed earlier in the circuit than the point selected for the output to the tape recorder. Usually, this configuration will result in a system which can "howl" if the monitor selector on the tape recorder selector is set for "tape," but the system will be capable of making high-quality tapes, with adequate level, and with flat frequency response. "Howl" can be positively eliminated only by adopting the "series" type of connection for the tape recorder.

Dunacord

the magnificent

Convenience

The magnificent

Convenience

The magnificent

Convenience

The magnificent

The magnificant

The magnificent

The magnificent

The magnificent

The magn

new professional Tape Recorder by Pentron



WHY DYNACORD IS THE NEW STANDARD OF PROFESSIONAL RECORDING

Finest for custom installation, exacting industrial use Push-buttons actuate computing interlock which cycles Dynacord through "stop" into any operating position automatically. Direct capstan drive ... 3 motors ... exclusive dynamic braking, fast, fool-proof ... reversible reel seats ... frequency response: ± 2 DB 30-15,000 CPS at 15 in./sec. ... signal to noise ratio: better than 55 DB. For standard rack mounting or installation in console. Specifications on request.

Model DTM Tape Transport Mechanism, \$395.00 net Model DP-100 Broadcast Amplifier, \$150.00 net Model DS-10 Audiophile Amplifier, \$90.00 net



Thousands have heard Dynacord's fabulous performance as a 6-channel stereophonic recorder in the All-Electronic Orchestra.

Now Dynacord Recorders are available for many critical industrial applications upon special order (from 1 to 6 channels on 1/4" tape).

THE PENTRON CORPORATION

781 South Tripp Avenue, Chicago 24, III.

Canada: Atlas Radio, Ltd., Toronto

Largest Exclusive Maker of Tape Recorders and Accessories
SEND FOR DETAILED BULLETIN TODAY!



AT HOME WITH AUDIO

(From page 31)

type, but family usage and custom frequently deviate to a point where an automatic device is used for uninterrupted playing of music for dancing (the children do) or perhaps for background music while dining (frequent); and not forgetting the tuner as a source, either. Hence selection follows selection, each being dropped mechanically for as many as the spindle can accommodate. For the matured appreciator of music, the open choice of tone arm, cartridge and stylus possible with the manual professionaltype turntable, and the deep pleasures they can bring, are a most attractive prospect.


As an example of another additive for which the expansion-attic principle has made this cabinet ready is the second

section, narrower but plenty adequate to accommodate any one of the well-known makes of the higher quality tape recorders. In this case the new 20/20 Concertone machine has been fitted into a mounting board atop a drawer practically universally dimensioned as to height, depth, and width (Fig. 7). In the same area can be used the tape transport mechanisms of other units with similar size base plates: certain models of the Ampex, Dynacord, Magnecord, Presto, etc. Naturally, the amplifiers would in each case be fitted into the panel placed directly over the transport mechanism, as shown, for easy operation and to maintain the proportions.

tion and to maintain the proportions.

Call this "powerhouse" a basic hi-ficabinet, or not; the point is that this

kind of design will let you grow as the hi-fi arts develop and grow and you occasionally find reason to replace one piece of equipment with another, or change to costlier units as your hi-fi sights can affordably be raised. In this cabinetry system there is a total of four flat pieces of wood, three of them oblong (one for the record player, one for both the tuner and amplifier control, and one for the tape recorder amplifier); and the other almost square, for the tape recorder transport unit. The odds are that the tuner and preamplifier-control panel would need cutting anew if these units were changed and prehaps the same might be true of the "downstairs" or record player panel. In each case, the instrument panel proper or mounting plate is easily taken out by loosening the manufacturer's mounting screws; then the wood panel comes out by removing three brass countersunk wood screws at each end (a total of six, for solid security). The record player platform is taken out by lifting it from its sliding tracks. The tape transport is easily removed by loosening the four metal plate screws; and then the wood carrier panel can be taken from its deep-drawer housing by removing four countersunk brass wood screws, set one in each corner. And that is all there is to making any equipment changeovers or, for that matter, removal of any of it for servicing, cleaning or repair.



Keep informed-read

ELECTRONIC MUSICAL INSTRUMENTS

By Richard H. Dorf

In one big volume, you can now learn all about the intricacies of commercial electronic organs, including the Allen, Baldwin, Connsonata, Hammond, Minshall-Estey, Lowrey Organo, and others, together with many smaller instruments. Constructional details on the author's Electronorgan and the simpler Thyratone show you how to build one of these fascinating instruments for yourself. A compilation in book form of the author's articles in Radio Electronics, brought up to date and with many additions. Price \$7.50 (Foreign, \$8.00).

Customary discounts to dealers and distributors

	MAGAZINES, INC., Book Division
KADIO	P. O. Box 629, Mineola, N. Y.
Please se	nd me* copies of Dorf's ELECTRONIC MUSICAL INSTRU- MENTS. I enclose check ☐ money order ☐ for \$7.50 each (Foreign, \$8.00).
Name	
Address .	
City	Zone State

Breathe Out the Hot Airs

There's no point in overheating-in fact, it is a bad climate for sustained system efficiency. So this cabinet has features like that divided air-space right over the tuner and the amplifier assembly to keep the fine finish of the top of the cabinet from being overheated and perhaps crazed, in time. (Fig. 10.) The tape recorder is ventilated by means of eight three-inch holes bored in-line into the back panel of its draw-out compartment, and a similar number of facing holes bored into the panel screwed on to the back of the cabinet (Fig. 8). The oblong port near the top of this portion of the cabinet helps dissipate the generated heat, and handily permits inser-tion of the lead-ins and cord-sets necessary for the operation of the tape-recorder for playing or recording through the main system. (Fig. 9). Stability of the draw-out parts is assured by use of three heavy-duty slide tracks mounted in parallel on the bottom of the sliding base of the weighty tape recorder. Unlike this is the mounting of the slides for the ligher-weight record player—on a pair of double sliding, side-mounted heavyduty tracks, the whole platform removable with a sharp lift of the ball-bearing trolley wheels out of the forward ends of the tracks. Another move towards stability is the installation of two strips of three-inch metal worked into the rear of the record player compartment. One is a permanent magnet attached to the fixed inner face of the cabinet's back panel, and on a level with it the other piece is attached to the inside edge of

the sliding record player platform. Since it is free-moving on roller slides nd absolutely level, it was discovered that the platform rebounded of its own inertia when pushed back in, with the likelihood of jarring the pickup from the record groove and maybe damaging cartridge and disc. The bar magnet. drawing the slide to with a reassuringly firm but gentle pull, prevents this.

How the Powerhouse Took Shape

In its constuction the cabinet was handled like a small house. You can say it is a ranch type "shack," all of it under one long-stretching roof. The framing at the front is built of sturdy 2×2 stock, top and bottom-the lintel and sill, so to speak. The sides total one inch thick, built of 3/4-inch wild grain fir plywood. faced with 1/4-inch Korina veneer. You can stop with the fir plywood and save the cost of the Korina (about 25-30 dollars more) and still have a sturdy cabinet structure with, besides, a graining similar to (but not as fine) as the teakwood now so favored for certain letter class furniture units. The Korina racing is neutral as to grain and its light wheat finish gives it a passive presence that neither housewife nor interior decorator find objectionable. Its facade offers a few accents with the black knobs and brass finished escutcheons of the hi-fi fittings, otherwise it makes rather a riuted note in a room with light painted walls and a large roomwide casement window.

Definitely, the hi-fi equipment came first, and then the cabinet was built around it. The equipment was acquired riece by piece and then collated for installation. The cabinet was erected, the author taking part, at the workshop of Modern Furniture Craftsmen, New York City. Without their patient help and advice the author's suggestions and very rough sketches, mostly made by waving of hands, could not have been shaped i to the finished product. Near as one can tell the cost of lumber and hardware came to about sixty-seventy dollars, give or take a few.

We hardly expect that this exercise in hi-fi housing (a subject for AT HOME WITH AUDIO promised in our agenda) could become exactly pandemic in the realms and warrens of home hi-fi. But it has its points, not the least of which (in addition to those enumerated above) is that its design seems to have hit upon a sit-down "strike"-in the sense that all the equipment can be operated and controlled chairside as mentioned above. though cased in a full-scale wall cabinet. Planned for uncrowded disposal of the components, it is a convenient extensor ci your ten fingers, with you meanwhile couchant, as they sometimes say in her-

It would seem that the spacious plan holds the components in an uncrowded array that to some hi-fi stalwarts is akin to the feeling of an organ console. And thus they would "play" it, wide-swinging in spirit and taking from it the gift that

FASTEST SELLING* FM TUNER USA!



PARTLY BECAUSE IT'S ONLY \$39.95



Realist FM Tuner Has —

- ARMSTRONG FM CIRCUIT
- FOSTER-SEELEY DISCRIMINATOR
- 5 MICROVOLT SENSITIVITY
- TUNED STAGE OF RF
- AUTOMATIC FREQUENCY CONTROL
- BUILT-IN AC POWER SUPPLY
- 20-20,000 CPS WITHIN 1/2 DB
- COMPACT 41/4 x 91/2 x 61/2" SIZE
- ORDER 36-888H BY MAIL!

AUDIO MAGAZINE SAID: "Despite its small size and low cost it is sensitive and capable of putting out a high-fidelity

BUT ALSO BECAUSE:

HIGH-FIDELITY MAGAZINE SAID: "Sensitivity surprisingly

AND 100's OF PROUD OWNERS SAY "JUST WHAT I WANTED!"

Matching Realist AM Tuner \$29.95



Matches FM electrically and in looks; super-het, tuned RF stage, AC supply! Order 36-887H by mail!

Matching Realist Amplifier \$29.95



10 watts, 18 peak; bullt-in RIAA-equalized preamp; separate tone controls; p-p 6v6GT; 20-20,000 ±1 db. Order 33-303H.



Shipping Weights: FM 61/4 lbs., AM 61/4 lbs., Amplifier 10 lbs.

Order by Mail! Free 224-Page Catalog!

RADIO SHACK CORPORATION

167 Washington St., Boston 10, Mass. and 230 Crown St., New Haven, Conn.



Now...easier more versatile operation for...

THORENS CD-43

THE ONLY HI-FI CHANGER



SIMPLIFIED
SPEED CONTROL
Dial-selection of
any of three speeds
plus a fine-tuning
knob to permit exact
pitch adjustments
above and below all
standard speeds.



CONTROL FOR
MANUAL OPERATION
Allows you to disengage the automatic
trip mechanism
to enjoy flexible
operation.

Plus an improved direct-drive motor with separate gear for each speed ...for absolute speed constancy and silence.



See Your Dealer or . . . for more about new improved **Thorens** Record Changers, Players and Turntables write:



is anybody's for the reaching: music from the heavens of inspiration, winging along electronic paths to Edens of listening, and calling out to the purity that is in each one of us. . . . Old Dr. Eiliott's famed five-foot shelf of basic books has nothing, for comprehensiveness, on this cabinet's sixty inches of electronic stepping stones reaching out, like Blake's ladder to the moon, towards the attainment of man's everlastingly chanted, "I want, I want." . . . It is free of mechanical crowding, control-knob bunching, cute disguising, or Rube Goldbergian contortion. Seated before this "console," you find that the control knob of the main amplifier is at about its exact center. Reach out with your left hand to tune the radio, or with your right, to bring in the tape recorder when (again with your left) you turn the selector knob that way. With both hands, bearing right-but not having to move from yeur chair-you put the reels on the tape machine; and, with both hands, but bearing left, you turn on the record player. And of course you can dub onto tape any one of these signal sources, singly or combined with the microphone; and listen at the same time through the loudspeaker whilst monitoring by VU meter, thus sharing with others the incoming signals even as they are recorded to tape without overloading; and of course you can monitor with headphones, still allowing others present to hear the signal, from the source, or as it emanates from the tape whilst being recorded.

Once you get the pattern fixed in your mind, its rather box-kitish construction practically puts itself together for you. It is a hollow rectangle with (if you

like) an off-beat Mondrianic subdivision of its facade, and hence its cubic contents, and with only a partial fixed front, as seen in the panels for tuner and preamplifier control, and for the tape recorder amplifier. (Fig. 11). The rest of the front is removably attached either with piano hinges (as the pull-out "platform" doors) or with drawer slides. The rear of the cabinet has been faced with 1/4-inch Korina veneer, finished like the rest of the cabinet in golden wheat. When used as a room-divider (which it could decoratively be) this back with its crew-cut array of wire, cable and cordsets, can be over-faced, a one or twoinch space away with, say, a clipmounted perforated hardboard panel easily removed for access for repairs, and so on.

One of the subdivisions is a third larger than the other. The total of 15 cubic feet has been assymetrically divided. The larger one has nine cubic feet, the other six cubic feet-either one ample enough to house a good speaker or speaker system—if that should be your way with a cabinet. The height of the larger section is virtually the same as the width of the smaller, and this proportioning establishes a relationship of masses akin to an (architectural) "order"-which is a structural truth that occasionally can result from a convergence of utility and form-and which in this case we are flattered that it very nearly is.

But let us pull this rhetoric down a peg or two—and say that some of us are advocates of the packing-case, or complete surround, technique of hi-fi housing; as opposed, say, to the kitchen

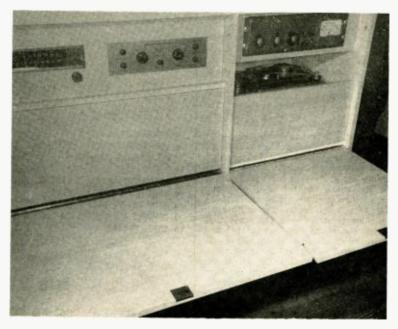


Fig. 11. The summing up: Sheer wood surfaces support and protect hi-fi system well-spaced out for flexible operation. Doors at full "out" position remain rigid and level; full length bross piano hinges and flush locks match the finish of instrument panels.

range or open style, top-of-the-cabinet placement. Either way, the point is that the equipment you choose for containment in the housing you choose, should not be such that (for horrid example) an amplifier vents torrents of decibelicose tantrums upon a mismate like an under-excursioned speaker cone. They should better be on deci-hil and coo terms, to carry the pun to the mach-nth degree of (your) tolerance. An essential consideration this, as the final choice is mind-made in the conviction that, of all the parts and components seen and heard at Audio Fair or audio-demo salon or friend's home, you prefer "this" rather than "that" item. Where price is no object, the odds are that what you choose will be of compatible qualities and capacities. But where cost must be held like a carrot before our eagerly twitching hi-fi noses, then we must beware lest it lead us to false economywhich is a mislead, indeed.

The components in the system under inspection this month are, on the other hand, of a representative quality. The hi-fi services they offer and are capable

i are not necessarily confined to any e brand. Those we have selected are (or were, some months ago when we began this "powerhouse" deal) for one, the latest available production models; for another they represent in fair measure optimum compatible quality, individually and collectively, at a price that can justifiably be said to make them a 'smart buy."

LETTERS

(from page 10)

the story is certainly indicated, and we would be more than glad to enlarge further on this subject or the arguments contained berein.

Cullen H. Macpherson, Asst. Mgr., Reproducing Components Division, Electro-Voice, Inc.,

Buchanan, Michigan.

(We appreciate Mr. Macpherson's recognition of what we meant to say. That we failed to make our opinion clear is an indictment of our semantics rather than of our engineering. Let us be practical: no commercially available loudspeaker reaches an efficiency of as much as 25 per cent over the entire audio spectrum—most will range between 5 and 10 per cent. Thus the difference between two hi-fi loudspeaker systems is not likely to be more than 6 db, but that is more than enough to trap the unwary ear and cause the louder of the two to sound better. We do think that output levels should be equalized for demonstration purposes, and the main point of our editorial was that the equalization should take place ahead of the power amplifier rather than between amplifier and speakers.

It's must not undersell efficiency, for an efficient speaker will permit us to run the amplifier at a lower level with consequent less distortion from that source, but it should not be the controlling factor in the selection of a loudspeaker. In any case, give both speakers a fair chance when making listening tests on a comparative basis. Ed.)

Announcing

_{marantz} power amplifier

40 WATTS "ULTRA-LINEAR"

Conservatively rated well below overload



We are proud to present a Power Amplifier which gives such outstanding performance as to further enhance the reputation we have built with the Marantz Audio Consolette.

- 20 WATT TRIODE OPERATION on optional switch position to protect lower power rated speaker systems
- METERED INSTRUMENTATION built-in and designed to enable anyone to adjust operation dynamically and statically ensuring long life with low distortion
- OUTPUT TRANSFORMER with unusually fine cail and care characteristics (embodying low leakage reactances and high flux-handling capabilities) maintains low distortion to frequency extremes together with high stability
- NEW TYPE 6CA7 OUTPUT TUBES designed specifically for high fidelity application give higher efficiency with lower distortion and dependable consistency
- COMPONENTS selected, without compromise, for ruggedness and reliability
- VARIABLE DAMPING available from separate 4, 8 and 16 ohm output terminals

\$177

103

See your audio dealer or write for data sheet

marantz company

44-15 VERNON BOULEVARD . LONG ISLAND CITY, N. Y.

*

TUBELESS AUDIO COMPENSATION

only 14 db insertion loss!

The Model 4201 Program Equalizer has been developed to provide utmost versatility for the compensation of sound recording and broadcast channels. High and low frequencies may be boosted or attenuated while the program is in progress with negligible effect on volume levels. It may be switched in or out instantaneously to permit compensation at predetermined portions of the program. This feature is especially useful in tope dubbing work.



Model 4201, Program Equalizer

FEATURES:

Equalization and attenuation in accurately calibrated 2 db. steps at 40, 100, 3000, 4000 and 10,000 cycles. Insertion Loss: Fixed at 14 db. with switch "in" or "out."

Impedance: 500/600 ohms. Low Hum Pickup: May be used in mod-

erately low-level channels

Send for Bulletin E for complete data Net Price \$195.00 F.O.B. North Hollywood

Model 4201 Program Equalizer is also available for the custom builder in kit form with complete wiring instructions.

Send for Bulletin TB-4.

Representatives in Principal Cities



Subsidiary of International Resistance Company
11423 VANOWEN STREET
NORTH HOLLYWOOD 3, CALIF.

THE ACOUSTIC EARSET

(from page 44)

 S_8 (cross sectional area of constricted air path leading into earset) = $1 \text{ cm}^2 = 10 \text{ m}^2$

$$M_{AI} = \frac{\rho_{0} T_{L}}{T_{S}}$$
(1)
= $\frac{1.18 \times 0.76}{11 \times 10^{-7}}$
= $1277 \times 10^{3} \text{ kg/m}^{3}$
 $M_{AI} = \frac{\rho_{0} E_{L}}{E_{S}}$ (2)

$$= \frac{1.18 \times 0.027}{0.3815 \times 10^{-3}} = 83 \text{ kg/m}^{3}$$

$$I = \frac{\rho_{0} S_{L}}{10^{-3}} = 83 \text{ kg/m}^{3}$$

$$M_{AB} = \frac{\rho_0 \cdot S_L}{S_S}$$

$$= \frac{1.18 \times 0.01}{10^{-4}} = 118 \text{ kg/m}^{3}$$

$$C_{AB} = \frac{S_{r}}{\gamma P_{o}}$$

$$= \frac{5 \times 10^{-6}}{1.4 \times 10^{3}} = 3.5 \times 10^{-11} \text{ m}^{5}/\text{newton}$$

where

γ = ratio of specific heat of air at constant pressure to specific heat of air at constant volume = 1.4

 $P_{\rm e}$ = Atmospheric pressure in newtons/sq. meter = 10^5

ρ₀ = density of air in kilograms per cu. meter = 1.18 kg/m³

(the cutoff frequency)

$$= \frac{1}{\sqrt{M_{12}C_{43}}}$$

$$= \frac{1}{\sqrt{118 \times 3.5 \times 10^{-11}}}$$

$$= \frac{10^8}{6429} = 15.550$$
radians per sec. = 2476 cps.

From this it can be seen that the cavity




Fig. 5. Static balance resulting from shape of earset.




Fig. 6. Appearance of experimental model of acoustic earset.

volume S_{ℓ} must be made as small as practicable so as to raise the frequency of resonance,

The Static Balance

The most satisfactory seal can probably be obtained only by means of an externally applied axial force against the earset from a spring steel headband.

Practical tests have shown, however, that good closure of the air leak can also be obtained by loading the earset with a small weight or concentrating the mass of the molding material on the axis corresponding to the pivotal suspension.

The method is shown graphically in Fig. 5 in which (A) is a free-body diagram showing the unloaded earset suspended at point P which is the resting point on the ear.

(A) in Fig. 5 shows that the horizontal force $F_r = O$ and a small gap θ will occur if equilibrium is reached before the earset touches the inclined headline H. In this state, the vector sum of the forces acting about point P merely combine to produce a downward resultant.

To realize a horizontal component of force and close the gap, a clockwise moment or torque about P must take place. The moment M is equal to force times perpendicular distance from axis y. From inspection of (B) in Fig. 5 it will be apparent that the maximum resultant Fr for a given added weight IV will occur when the latter is placed as far as to the left of P on axis x as is possible.

The experimental earset shown in the photograph was fashioned from hardwood and weighs 1.6 ounces. The dimensions are 2½ in, long by 1½ in, wide, Subjective listening tests show the earset to be entirely satisfactory for the intended applications. Suitable molding ma-



the 3rd audio anthology Ready October 13

Reprints of articles which appeared in AUDIO from July 1952 to June 1955, 124 pages of articles of greatest interest to the serious hobbyist.

the 2nd audio anthology is still available—board or paper cover

(The original audio anthology is no longer in print.)
CUT OUT — MAIL TODAY!
Book Division, Dept. 10 Radio Magazines, Inc., P. O. Box 629, Mineola, N. Y.
Gentlemen: Enclosed is _ check _ money order for \$ Please send me
copies of the 3rd audio anthology (paper cover) @ \$2.50 each copies of the 3rd audio anthology (board cover) @ \$3.50 each copies of the 2nd audio anthology (paper cover) @ \$2.00 each copies of the 2nd audio anthology (board cover) @ \$3.00 each
Name (please print)
Address
City Zone State

UNIQUE RELATIONSHIPS

(from page 64)

The slope of the attenuation response, expressed in terms of "unit slope" can be

$$db_{s} = \frac{x^{s} \left[2x^{s} + (a^{s} - 2)\right]}{x^{4} + (a^{s} - 2)x^{s} + 1}$$
 (7)

Where peaking occurs the frequency of peak is given by

$$x^2 = \frac{2 - a^2}{2} \tag{8}$$

and, substituting (8) in (5), the height of the peak is given by,

$$db_{peak} = -10 \log_{10} \left[a^2 - \frac{a'}{4} \right] \tag{9}$$

In expressions (5) to (9), frequency given by x is normalized to the unit slope point, or 90-deg, phase response. An alternative normalizing reference for the attenuation response is the frequency of peak. Using y for frequency normalized at this point, y is given by

$$y^2 = \frac{2x^2}{2 - a^2} \tag{10}$$

and the attenuation response becomes,

$$db_{all} = 10 \log_{10} 1 + \left(\frac{2 - a^2}{2}\right)^2 (y^4 - 2y^2)$$
(11)

From this expression it is evident that the attenuation response will cross the zero reference at $y^{*}=2$, or $y=\sqrt{2}$.

Where three reactances contribute to a roll-off, the complex attenuation factor can be written,

$$A = 1 - ax^{s} + jbx - jx^{s} \tag{12}$$

Using these constants, the attenuation re-

 $dbatt = 10 \log_{10} 1 +$

$$(b^2-2a)x^4+(a^4-2b)x^4+x^6$$
 and the phase response is, (13)

$$u = \tan^{-1} b x - x^{2}$$

from which the 90-deg, phase-response point is $x^i = 1/a$, and the 180-deg, point

The slope of the attenuation response, in terms of unit slope, is

$$db_{s} = \frac{x^{e} \, 3x^{i} + 2(a^{e} - 2b) \, x^{e} + (b^{e} - 2a)}{x^{e} + (a^{e} - 2b) \, x^{i} + (b^{e} - 2a) \, x^{e} + 1}$$
(15)

from which the slope at the 90- and 180-deg, phase points can be evaluated:

$$slope_{\phi} = 90^{\circ} = \frac{3a - b}{a - b} \tag{16}$$

$$slopc_{\phi} = 180^{\circ} = \frac{2ab}{ab - 1} \tag{17}$$

The unit slope point is given by the solution to the expression,

$$2x^{4} + (a^{4} - 2b)x^{4} - 1 = 0$$
 (18)

and the two-unit slope point is given by the solution to the expression,

$$x^6 - (b^2 - 2a)x^3 - 2 = 0 (19)$$

The form of expressions (18) and (19) show that there may be more than one real solution for some values of the constants a and b. This can occur where the attenuation response has a dip followed by a peak. But the phase response is always progressively in the same direction—delay for high-frequency roll-off, and advance for low-frequency roll-off.

terials for a manufactured product are the phenolic compounds such as Durez, cellulose acetate such as Lumarith and others with similar physical properties.

BIBLIOGRAPHY

"Speech translating system," Electrical Communication, July 1936, pp. 98 and 99. A. Haag and R. Bolts, "Die Siemens über-setzeranlage," Siemens Zietschrift, November 1938.

"U.N. broadcasting and sound system," Tele-Tech, January 1947.
"Radio Translation — U.N. Equipment,"

Equipment,"

Wireless World, March 1947. A. W. Schneider, "U.N. broadcast and P.A.

systems," Audio Engineering, August

1947.
C. A. Tuthill, "Multilingual interpretation

systems," Audio Engineering, June 1947.

W. Pipe, "Sound reinforcing system, Church House, Westminster, England."

Wireless World, March 1951.

rank, Massa, Acoustic Design Charts,

Frank Massa, Acoustic Design Charts, Blakiston Company, (1942).
Leo L. Beranek, Acoustics, McGraw-Hill Book Company, Inc., 1st ed. (1954).



Oct. 3-5-National Electronics Conference, Hotel Sherman, Chicago.

Oct. 12-15-Seventh Annual AES Convention, Hotel New Yorker, New York City. Annual banquet on evening of Oct. 12,

Oct. 13-16-The Audio Fair-Hotel New Yorker, New York City.

Oct. 21-23-New England High Fidelity and Music Show, Hotel Touraine, Boston, Mass.

Nov. +6-Philadelphia High Fidelity Show, Benjamin Franklin Hotel, Philadelphia, Pa. A fifty-cent admission charge has been agreed upon to assure attendance by an interested hi-fi conscious audience.

Nov. 3-6-First Mexican Audio Fair. Hotel Reforma, Mexico City. For information. write Mario R. Aguilar, Lopez 43-301, Mexico 1, D. F.

Jan. 18-20-Canadian Audio Show, Windsor Hotel, Montreal, Canada, Managing Director, Emery Justus, 1022 Sherbrooke St. W. Montreal, P. Q.

Feb. 8-11-1956 High Fidelity Music Show, co-sponsored by the Institute of High Fidelity Manufacturers and the West Coast Electronic Manufacturers' Association.

THE CONTRACTOR OF THE PROPERTY OF THE PROPERTY

THE

is almost here See next page

Leads in 'C' Core technique!

PARTRIDGE

CFB Audio Transformer

Reproduces full A.F. range with lowest distortion. Series leakage inductance 10 mH Power up to 60 watts from 22 Kels to 30 Kels, Distortion less than 1%

Price \$43.75 net

Type T/CFB also available, similar to above, but with each half primary brought out to terminals as a separ-ate winding and tapped at 43", of turns.
Price \$47.00 net.

The Partridge Range

Specification and prices of the full range, some of which are illustrated right, and name of your local distributor, available from:

Partridge Transformers Ltd., c'o British Electronic Sales Co. Inc. 23-03 45th Road, Long Island City 1, N.Y.



PARTRIDGE TRANSFORMERS LTD. TOLWORTH

ENGLAND SURREY



diamond phonograph needles:

comments on

"... nothing else but diamond styli will yield both lastingly good sound and peace of mind. Get diamonds."

Editor, High Fidelity Magazine Music Columnist, Atlantic Monthly

Ask your dealer or serviceman for a BRAND NAME DIAMOND Record-Needle Care Folders: Dept.AE.62 St. Mary Street, Yonkers, N. Y.

AUDIO • OCTOBER, 1955

CASCODE PREAMP

(from page 27)

level was about 1.22 µv. (shorted input). "Line bumps" again come through about 10 to 12 db above average noise unless a gas tube (VR-105 or 5651) regulator is used to supply the input-tage plate voltage. The design output level was 1.5 volts, the IM (60 to 7,000 cps, 4:1) was not measurable above the residual instrument level at this output. The IM was about 0.15 per cent at 8 volts output and came up to 0.47 per cent at 15 volts.

In both of these amplifiers the major flicker effects were 4 to 8 db peaks while the frequency components of this flicker ppeared to be under 30 or 40 cps. This fact, plus the problems of turntable rumble and the inevitable poor amplifier and speaker performance in this "subsonic" range of 25 to 30 cps further indicate the desirability for the use of low-frequency cut-off circuits following a preamplifier. Such a rumble filter will be described in a subsequent article covering an environmental and level control unit where such a filter is available as an integral section of the system.

The frequency response of this unit is shown in Fig. 7. This matches the RIAA curve to within approximately ± 0.5 db. The environmental equalizing controls will normally provide more tran adequate compensation for any other curve as has been previously pointed out.9

A power-supply unit providing both filament and plate power is shown schematically in *Fig.* 8 and pictorially *Fig.* 9. This unit is also used with the

previously mentioned level and equalizer system. Where a more compact and simpler power supply is desired for use with only the preamplifier, then the circuit and components of Fig. 10 will provide satisfactory results. A number of careful design and application techniques must be utilized in the use of a high-gain preamplifier such as the unit under consideration. Some of the salient features which contributed markedly to the excellent performance of this low-level amplifier were:

- 1. D.c. filament supply, properly and adequately filtered.
- 2. Wire-wound resistors in cascode plate, grid and cathode circuits, deposited film resistor in grid of second tube section.
- 3. Shock mounted assembly of cascodestage tube.
- 4. Minimum area of input circuit loop.
- 5. Mu-metal shield around input tube and grounded. Tube kept away from strong external magnetic fields with tube oriented such that maximum magnetic field is kept at right angles to the tube elements (if necessary).
- 6. Maximum isolation of input circuits from filament lines.
- 7. One point grounding of the system and careful avoidance of "ground loops."
- 8. Non-magnetic chassis.
- 9. Proper use of an input transformer.
- 10. Proper use of a following low-frequency cut-off filter.

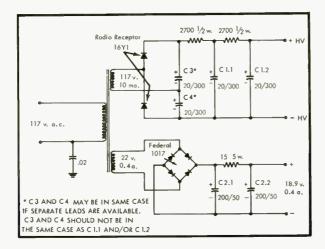


Fig. 10. Smaller and less costly power supply which will serve adequately when only the preamplifier is to be powered.



HI-FI AUTOMATIC RECORD CHANGER

The industrious-invisible hands of **Dekamix**—creatures of ingenious design—are busily engaged in the many automatic functions so essential to superior record performance and listening pleasure. The **Dekamix** intermixing record changer is the result of outstanding craftsmanship that is devoted to producing an instrument extremely simple and functional, yet fully automatic.

- automatic changing of 12", 10" and 7" records in one stack
- 3 speeds—331/3, 45, 78
- weighted top plate that obtains full advantage of air cushion effect—to preserve record surface
- accoustically balanced tone arm; non-magnetic turntable
- stops automatically after last record is played

DEKAMIX HAS EVERY FEATURE OF HIGH PRICED RECORD CHANGERS AT THE AMAZINGLY LOW PRICE OF \$44.95



AT LEADING HI-FI MUSIC CENTERS WRITE TODAY FOR COMPLETE LITERATURE

ERCONA CORPORATION

(Electronic Division)

Simplify design and calculation

practical **ELECTROACOUSTICS**

M. RETTINGER

The keynote of the book is UTIL-ITY in a practical coverage of the rapidly developing field of electroacoustics.

Electroacoustics is presented in the light of the most recent developments. The modern methods and devices discussed in the book are those used at present in radio, sound-film recording, and allied arts.

Special emphasis is placed on the relatively new and promising field of magnetic recording.

Many tables and curves show at a glance the required quantities, reducing calculations to a minimum. The diagrams in the book are useful not only for lessening figure work but also for checking calculations and illustrating relationships.

CONTENTS-

FOREWORD. MICROPHONES: Anecdotal History of Microphones—General Aspects — Types of Microphone — Microphone Technique. Loudspeaker—Loudspeaker Enclosures—Loudspeaker—Loudspeaker Enclosures—Loudspeaker—Loudspeaker—Cabinet for Loudspeaker—Loudspeaker—Cabinet Fancis—Trectional Radiation—Damping Loudspeaker-Cabinet Panels—Speaker Distortion. Circuitrs: Constant-Resistance Crossover Networks — Mixers. MAGNETIC STRUCTURES: General Aspects — Permanent Magnets. Public-Address Systems: General Aspects — Outdoor Loudspeaker Output-lower Requirements — Specifications — Testing Public-Address System Installations—The Hollywood Bowl Sound-Reinforcement System—Loudspeaker Matching, VIBRATIONS: Transients—Vibration Isolation. Amonitecture. Loudspeaker Matching, VIBRATIONS: Transients—Sound-Absorptivity Measurements—Acoustic Measurement Facilities. Magnetic Recording and Reproducing Heads—Front Gap—Back Gap—Alternating-Current Magnetic Erase Iteads—I requency Response—Experimental Results. Appendix. Octaves—Decibels, Volume Units, Dbm versus Watts—Dbm versus Voltage—Bibliography—Index.

-271 pages • 1955 • \$10.00

Order your copy today from

AUDIO

P. O. Box 629 Mineola, N. Y.

AUDIO ETC

(from page 91)

promise. It uses the basic 600 unit introduced awhile back and guarantees a quality, subject of course to the tape being played, that is only microscopically less fancy than that of professional 15-inch tape sound. Second, the system, with this quality, is remarkably low in price. \$700 covers the works-all but the tape. You don't have to works—an but the tape. You don't have to pay for the expensive recording elements. This is a tape phonograph. It plays only. You get the 600 mechanism, minus recording and erase sections, mounted (alternative control of the control tively) as a home phono unit, in a small and phonograph-like wood box. (You can have it in the Samsonite case if you prefer.) You get the 620 speaker system, developed to get the 020 speaker system, developed to match the 600 recorder, mounted similarly in a neat lome-type table cabinet. Two of them. And the power amplifiers are already built into these speaker units.

Thirdly, this system—at last—is small, to suit home users. Really small: three moderable similarly bears and the suit home.

to suit home users. Really small: three mod-estly sized boxes, not one of them very much bigger than the usual portable table tape recorder, all of them table-style (though I assume the speakers can sit on the floor if desirable).

This is a vast change from most earlier two-channel systems! It represents a com-

promise of sorts, of course, but a compromise of the most practical and intelligent kind in the way of hone thinking. The small speaker cabinets are, in the new manner, fixed up to produce a remarkable amount of useable musical bass out of a small space. Only a slight boominess (to the sman space. Only a signi boominess (to the well-versed ear) betrays the presence of a relatively tiny enclosure. It will bother very tew music lovers, if any. The loss in pure fidelity is relatively tiny in the face of the gains in practicability for home listening.

Indeed, the demonstration of the 612 was in rather startling contrast, you may guess, to that of numerous earlier "binaural" or stereophonic systems, where expensive tape players, enormous amplifiers and great batteries of massive loud-speakers have given most newcomers the impression that twotrack sound in the home will never do unless it weighs a couple of tons, costs thousands, and can blast holes through every wall with sheer sound volume! It was this new and, I felt, happy combination of extreme compactness, simple home-style looks and high sound quality that first made me think, here finally, is the beginning of practicality in the two-track field—for honest musical en-joyment, not merely gadgetizing. There were other things, too. The tricky dramatic presentation, via a small portable

stage with curtains that concealed the actual units but let the sound through by itself, was a legitimate stunt. It emphasized the "big" sound that these small units could make, and did. And, for the first time I've ever heard it publicly, a comparison was made which seems to me the only honest one if two-track sound is to be valued against one-track sound. The double-tracked music, two tracks through two speakers, was compared directly, AB-style, with the sound of one track alone through the same two speakers. In too many earlier presentations this vital comparison has been unaccountably missing. Too often I've heard two-channel sound on two speaker systems compared misleadingly with one-channel sound on only one of the speakers.

Unexpected Dividends

Well-did it work? Did the double-track

music sound better than one track through both speakers? Yes, and this was not unexpected. As has been fairly evident all along. a two-channel system usually "works" to some extent, given a halfway decent tape (and we heard a couple of the excellent RCA jobs). That is, there is almost always some listening area, somewhere in front of the two speakers, where the sound fuses nicely into one sound-picture, not clearly meety into one sound-picture, not clearly coming from either source but spread out uniformly between them, and within it a directional sense, a feeling of space and immediacy. In most demonstrations and experiments I've been in on, this has happened, even though the dual mikes may have been placed anywhere from six inches to twenty feet or more apart. It happened

very nicely with the Ampex demonstration.

The only trouble is—where? That is the rub! In some listening rooms it hardly happens at all, due to unevenness in the room acoustics, especially where the two sides of the room are unlike. Even when the room is quite symmetrical, the favorable listening area is apt only too often to be confined to a straight, thin line right down the middle! People listening off to the sides—most of the audience—simply hear two speakers. No fusion. This is particularly unfortunate in big demonstrations with big speakers for big spaces. A single-file line of listeners right down the middle hears everything perfectly. The rest of the folks don't get the effect at all. Now I've only heard the Ampex 612 once

at this point, but I'm going out on a tiny limb to suggest that it has, by its very find to suggest that it has, by its very compactness, perhaps hit some jackpots in listening that the big systems have missed out on. I won't be able to confirm this for awhile and neither will you. But we shall

see. Stereophonic two-channel listening is very dependent upon angles. Most important, upon the angle between you, the listener, and the two speaker systems. This is a spatial effect, after all; you can't have direction without direction, so to speak. Granted that the walls and ceiling and general acoustics are terribly important. But the basic listening angle comes first. Put the speakers too close together—for

you-and the two sounds might as well be one. (There still can be some improvement, possibly due to phasing differences and an induced sense of direction, but this is a complex business and it isn't at all clear yet, to me at least, just what goes on be-tween the two ears.) Put the speakers at too wide an angle apart, and you cease to fill up the space between them. The fusion unfuses and you have simply two speakers, two separate sound sources. The magic is

The optimum stereo listening set-up, as far as I can figure it, involves an angle from you to the two speakers of from about 20 deg. to 45 or 50, roughly speaking. In some situations you might stretch it further sound out enough for space-feeling and directionality but not far enough to break the vital fusion of the two sounds into one. Equal distance, of course, from each speaker—and the tolerance there, again, is not very great. Side listeners always lose out. The middle is best.

Now here are my points anent the unexpected dividends in compact, small-speaker stereo listening, as with the Ampex 612

1. In a large hall very few people can hope to find themselves in a good stereo listening position. Wrong angle and, worse, offside unbalance, one speaker closer than the other. (Big-hall liveness can pretty much wreck the stereo effect, too.) So also with many large home stereo or "binaural" in stallations where big speakers are placed.

almost necessarily, a good distance apart. (Many people put them too far apart in a mistaken search for more "perspective." But in the average home there is only a handful of listeners and there isn't much room. The ideal listening area may be pretty small—yet it can still accommodate the whole "audience" quite comfortably. But it has to be close to the two speakers. Space requires it, and most people want to be close to the music, anyway. Matter of national habit.

2. The small, compact stereophonic twospeaker system, then, has irrefutable benefits in the home: A. The smaller the speakers, the closer we can get ourselves to them without audible and visual discomfort. B. The small, table-type speakers produce their most favorable *angle* for stereo listening at precisely the right distance for the average room. Say from four to eight feet.

Figure it out for yourself. It's simply a combination of volume and angle, to fit the living room space. Not that the Ampex speakers—two of them, remember, and twice as much sound as one speaker system - don't make all the noise you're likely to want. They filled a hotel parlor, ten times the size of a living room, with the greatest of ease. The point is that their optimum volume level is just right for the average sensible, musical home. So is the natural a 1gle you'll get between them in a commonsense furniture arrangement of the sort convenient with small, table-style speaker boxes

3. One final point. Room shape, walls, reflections, have much to do with two-track loudspeaker success. Where an oddly shaped room (say with an L in it to one side) is practically impossible, another, with symmetrical walls on each side of the speaker profitions in a practically impossible. positions, is excellent.

The larger your speakers, the wider your spacing, the more immediate is this annoying trouble with side-reflections or unbal-

The smaller, the more compact your two-speaker system is, the closer you can get to in the less influence is there due to walls and room shape.

The chances for good stereo listening via

a system such as the Ampex 612 then would seem to me, speculatively, to be much greater than with the large, bulky big-

seaker systems heretofore sold.

To sum it all up, put it in four words:

The smaller the better. That's my hunch
for stereophonic listening in the home, and
I think Ampex has got the bull by the horns, or mare by the tail. Stereo has finally arrived.

What about two-channel stereo tapes? See RECORD REVUE, this issue.

3. ATR for Tape—concluded

It wasn't exactly "tomorrow" as I promised, but I did get to finish the experiment with the ATR heavy-duty (model 12RHF) 12-volt inverter described interim-wise in the August issue. You'll remember that the idea was—will a good auto battery inverter, 6 or 12 volts to a.c. line, operate a tape recorder for amateur, emergency, or experimental recordings in the field? The model I got was designed to take heavy loads, a professional tape recorder or equivalent, and my first experiment merely loaded it with a Columbia 360 phonograph,

drawing relatively little juice.

The "hash" and extraneous noise was reasonably low and, it seemed to me, would not cause serious trouble in recording. But the pitch—alas—was wrong. Played a half step too high. A tape recording made un-der such circumstances would play back on power line current a half step too low, which is a lot and too much.

But was the inverter adequately loaded down? I thought not. And so, just now, I strung up my lines (with every extension cord in the house) and plugged my Magnecorder, plus a ten-watt amplifier, into the inverter. Same test: I played a tape, already made, then quick-like-a-flash, shifted the whole load over to the house current, for an AB comparison of pitch under load.

I was right in my hunch. At least mostly. The inverter definitely ran slower than it had with nothing but the Columbia 360 to load it down. But it still ran slightly too high in frequency though the voltage setting was at the "low" position. (Adjustable voltage output on the inverter.) The music still played slightly lower in pitch on the power line than on the inverter

Much less difference than before, but enough to cause trouble in a careful recording job. (A tape made this way would play back a bit too fast on power-line current.) Most people would scarcely notice the dif-

ference, however.

Aha, says I. let's carry this on a bit further. More load, and maybe the pitch will came down to par, 60 cps. So on goes my transcription table, added to the Magnecorder and the ten-watt amplifier. Ought to be quite a heavy drain with all this going at once. Then, just to see what would happen, I went out and diabolically switched the inverter away from "low" voltage up to "max"—to see how much faster the equipment would then run, when, whoops . . . the fuse blew. End of experiment.


I took that fuse out of the inverter and found it was a 20 amp. model! Don't anyone tell me I didn't load down that heavy-

duty inverter heavily enough.

Conclusions: 1. It seems that most auto inverters tend to run a bit too fast (high in frequency), even under load. I've run into the same trouble before. It's hard to get them down to a flat 60 cps. Maybe an excess of caution on the makers' part? Phono changers sometimes run too fast for a similar reason-the makers are afraid of heavy loads that would slow the table down, and so set them to run too fast at normal loads.

- 2. Inverters tend to be variable in frequency (pitch) according to load, inevitably. (If they didn't they'd cost far too much. Whaddlya want for your money?) The difference is not more than a quarter to a half tone, but it may be very noticeable to the ear, whether in playing standard recordings or in playing back inverter-made tape recordings on power-line equipment.
- 3. The simple inverter nevertheless is a highly useful gadget and can give superb service if you keep all this in mind—and especially if you run simple tests ahead of time to find out just what your inverter will do with a given load and a given situation.

Semi-professional users note this: If you plan to make disc pressings or tape copies of your inverter-made tapes--don't worry. Almost any professional recording device will run your tapes slightly faster than standard to correct the pitch discrepancy in the copying process. That is—if you tell them about it! Be prepared.

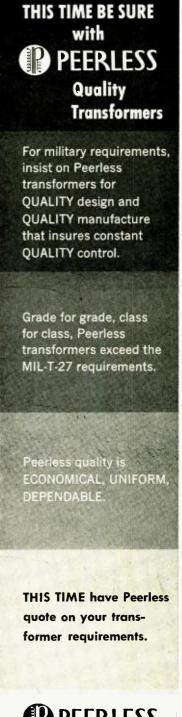



A Division of



9356 Santa Monica Blvd., Beverly Hills, Calif. 161 Sixth Avenue, New York 13, N.Y.

SAVE 25%



This is our

GROUP SUBSCRIPTION PLAN

Now you, your friends and co-workers can save \$1.00 on each subscription to AUDIO, If you send 6 or more subscriptions for the U.S., Possessions and Canada, they will cost each subscriber \$3.00 each, ¼ less than the regular one year subscription price. Present subscriptions may be renewed or extended as part of a group. Remittance to accompany orders.

AUDIO is still the only publication devoted entirely to

- Broadcasting equipment
- Acoustics
- Home music systems
- Recording
- PA systems
- Record Revues

Name
☐ New ☐ Renewal
Name
□ New □ Renewal
Name
New Renewal
Name
□ New □ Renewal
Name
Address

U. S., Possessions, and Canada only

RADIO MAGAZINES, INC. P. O. Box 629, Mineola, N. Y.

Industry Notes . . .

Heralding the season of audio exhibits, New York's fashionable Liberty Music Shops entertained nearly 8000 visitors at its "Hi-Fi Show" October 12 to 14. Participating exhibitors included such well-known manufacturers as Pilot, Ampex, Interelectronics, Pentron, RCA, Magna-vox, Bozak, North American Phillips, Jensen, etc. Virtually an Audio Fair in ministure, the Liberty Hi-Fi show was a graphic example of what a promotionwise dealer can do to stimulate interest in high fidelity in his locality.

Precision Radiation Instruments, Inc., Los Angeles, Calif., announced recently that it has contracted for the acquisition of Radio Craftsmen, Chleago manufacturer of high-fidelity components and equipment. President Leslie M. Norman of Precision stated that the Chicago firm will be operated as a subsidiary and will continue to increase output of amplifiers, tuners, filters, and equalizers. John H. Cashman, president of Radio Craftsmen, will serve in an advisory capacity until December 31. December 31

Opening of new facilities in New York City for the repair, modification and overhaul of all RCA commercial and industrial electronic equipment took place September 12. Located at 419 W. 54th St., the shop is operated by RCA Service Company, Inc., and supplements the company, present similar facilities in Camden. The new shop will service RCA equipment users in the New York Metropolitan area, such as broadcasters, schools, electronic distributors, and service agencies. Under the management of J. J. Brown, this latest addition to RCA's expanding service facilities will be staffed by factory-trained personnel.

United Transformer Company has started operations at its new plant located at 4008 W. Jefferson Blyd. Los Angeles, Callf. Allen Mitchell, UTC president, in announcing the opening, stated that the new plant is fully equipped with the most modern production facilities for the manufacture of all types of transformers, reactors, solenoids, variable-voltage transformers, and filters for the electronic field.

RECORDS

(from page 87)

been launched, are perhaps much greater than you

would think. The reason is simple.

For a good while many record companies have heen taking down two versions of all recording sessions, one on standard single-track tape and another, with different mikes, on two simultaneous tracks. The double-track version is simply put in storage; or (as in the case of a recent Dessoff Choir recording about to be issued) the two tracks are comfined into one to make the final "standard" version.

Not all of these two-trackers, to be sure, are guaranteed to make good stereophonic listening. The two-channel technique isn't that well under-The two-channel technique isn't that well understood yet. But it is holling down, so to speak, to a reasonably uniform approach among the more enterprising engineers. And remember that a two-channel tape is as easy to reproduce in quantity as the usual half-track, play-it-one-way-and-play-it-back type now on the market. Indeed, the copying technique is virtually identical.

The only difference is the doubling of the tape cost as compared to the half-track tape with two costs of the property of the propert

cost as compared to the hall-track tape with two musical "sides," one each direction. But keep in mind that recent improvements have already brought wide-range hi-fi at 7½ ips where formerly the 15 ips speed was necessary, thus effectively cutting hi-fi tape cost in half. Other savings, when tape begins to sell in something more

than driblets, should begin to restore a balance. Note: More tape reviews, stereo and plain, in coming issues.

FOR SALE: Audax 16-in. Compass Pivoted Arm with universal adapter and 6.F. RPX-052 cartridge, \$25. BC-348-Q receiver, \$50. Charles Leigh. 162 Passaic St., Trenton, N. J.

AUDIO CONSULTANTS for the Kansas City area, Specializing in the design and installation of high-fidelity, sound, and control systems. For information, write, wire, or phone Donald M. Walls, 3747 Eaton, Kansas City, Kansas, Phone Johnson 7664.

CLASSIFIED-

Rates: 10¢ per word per insertion for nancommercial advertisements; 25¢ per word for commercial advertisements. Rates are net, and no discounts will be allowed. Copy must be accompanied by remittance in full, and must reach the New York office by the first of the month preceding the date of Issue.

THE AUDIO EXCHANGE has the largest selection of new and fully guaranteed used equipment. Catalog of used equipment on request. Audio Exchange, Dept. AE, 159-19 Hillside Ave., Jamaica 32, N. Y. OL 8-0445. AUDIO EXCHANGES AUDIO

6-Element Broad-Band FM Antenna. All amless aluminum. \$10.95 ppd. Wholesale Supply Co., Lunenburg 10, Mass.

25-50% DISCOUNT. Factory-fresh guaranteed LI records. 69¢ and up; send 20¢ for catalogue. SOUTHWEST RECORD SALES, bept. A. 1108 Winbern, Houston, Texas.

AMPLIFIERS-HI-FI

AMPLIFIERS—HI-FI
45% off 40,000-cycle amplifiers, recorders, planos, organs, accordions, typewriters, movie equipment, binoculars. Amazing bargains! ABELMART, 466 Belmont, l'aterson 2, N. J.

HIGH FIDELITY SPEAKERS REPAIRED
Amprite Speaker Service.
70 Vesey St., New York 7, N. Y. BA 7-2580

VARITYPING Composition, DSJ, IBM, paste-up, ruled forms, advertising layout and technical matter in English and foreign languages. Catherine Rein, 874 Broadway at 18th St., New York, GRamercy 7-5720

FINE PHONOGRAPH RECORDS cut from your favorite tapes. Handy timing chart and details free. SOUND SERVICE ENGINEERS, 1778-A Fulton Avenue. East Meadow, L. I., N. Y.

TAPE RECORDERS, professional quality. Transport, \$175; heads, \$75; amplifier, \$150. Write for specifications. E. J. Lesher, 2730 Heatherway, Ann Arbor, Mich.

WANTED: Price on Lansing D-208 or Wharfedale W10-CSB speaker, Arthur Reed, 712 Erie, Shreveport, La.

Splices in a wink! NO SCISSORS! NO RAZOR BLADES! with GIBSON GIRL TAPE SPILICERS. Diagonal-cuts tape ends and trims splice edges with the "Gibson Girl" shape. Model TS-4, \$8.50 list. Model TS-4 leluxe, \$11.50 list. At your dealer or write: ROBINS INDUSTRIES CORP. Dept AU, 41-08 Bell Blvd. Bayside 61, N. Y.

WAGNER-NICHOLS microgroove disc recorder, \$100; Crestwood tape recorder, \$85; Electro-Voice 635 dynamic microphone, breath filter, desk stand, \$35. All new condition, priced FOB. V. R. Hein, 418 Gregory, Rockford 131

D42 CONDENSER MICROPHONE—0-10 kc ±1 db. \$20 (\$35 calibrated). Write for data. Carl Tendick, 900 Glenway Dr., Inglewood. California.

ELECTRIC GUITARS, amplifier, parts, wholesale. Free catalog. Carvin, A-287, Covina. Calif.

TECHNICIAN-AUDIO

With good technical education and beavy experience installing and maintaining ampliers and sound systems; applicant must have car and ability to take charge in near future of installation and maintenance crews in field on large sound. Muzak, and telephone systems; excellent opportunity and working conditions for right man with aggressive

NEW JERSEY COMMUNICATIONS CORP. Kenilworth, N. J. CH 5-1030

FOR SALE: Browning Model RV-31 FM tuner, excellent condition, \$65, L. F. Wagner, Deansboro, N. Y.

NEW Fairchild 50-watt amplifier, \$105. NEW Rek-O-Kut B12-H, \$98.95. Box CP-1, AUDIO

WANTED—Audio Frequency Wave Analyzer for cash. Stuart J. Myers, Beaty Bldg., Warren, Pennsylvania.

FISHER 50RT FM/AM tuner, excellent condition, \$120. Write Adkisson, 216-B Chris-tian Lane, Columbus, Ga.

110

AUDIO • OCTOBER, 1955

PROFESSIONAL DIRECTORY



HIGH-FIDELITY HOUSE

Most complete stock of Audio components in the West

Phone: RYan 1-8171 536 S. Fair Oaks, Pasadena 1, Calif.



CANADA High Fidelity Equipment Complete Lines . Complete Service Hi-Fi Records - Components and Accessories

LECTRO-VOICE SOUND SYSTEMS



Literature and sample splice on request! TOSEAL 3727 33rd st., Long Island City 1, N.Y.

Industry People...

Bill Herrman, who covers the audio and hi-fi industry in New York for "Retailing Daily," has announced his resignation effective the middle of October. His final chore will be coverage of The Audio Fair, after which he will depart for Southern California. Both his competitors and his contemporaries are unanimous in the consensus that the West Coast's gain will be a distinct loss to the Manhattan chapter of The Fourth Estate. .. Walter Stanton, president of Pickering and Company, proved beyond question that a single individual can harbor both administrative and engineering talent, in his delivery of a technical paper describing the new Pickering Fluxvalve cartridge before the September 13 meeting of the New York chapter of the Audio Engineering Society: more than 250 members turned out.

Harry L. Owens, formerly chief of the Solid State Devices branch of the Signal Corps laboratory at Fort Monmouth, N. J., has Joined Texas Instruments, Inc., Dallas, Tex., as chief engineer of the Semiconductor Products division .. Luther M. Sandwick has been appointed sales manager of Pilot Radio Corporation—he was previously with TDC Division of the Bell & Howell Company, Wilcox-Gay Corporation, and The Magnavox Company .. Curtis B. Rofman is newly-appointed vice-president in charge of sales for Brush Electronics Company.

New appointments to the staff of Ampex International, recently-formed division of Ampex Corporation, are J. E. Rogg, manager of the export marketing department, and Miss Peggy L. McElligott, manager of the economic and organization planning department. Other Ampex appointements include Charles L. Bange who has been named audio representative in the Washington, D. C. district office, and Harold J. Bresson who has been transferred from the company's Redwood City plant to the audio staff of the New York district office.

Arthur Priest, formerly national sales manager of Presto Recording Corporation, is now associated with the Leon L. Adelman Company, New York factory representatives—there has been established an

STEREOTAPE

a new line of pre-recorded tape devoted entirely to two channel stereo-binaural write for free catalog


demonstration test tape \$2.00 p.p. STEREOTAPE 5607 metrose ave., hollywood, cal.

Electro-acoustic Engineer

Hi-Fi and Public Address

Loudspeaker design, laboratory, and production methods experience. Must be able to handle all phases of development and liaison between engineering, production, and top management personnel. Position is with leading loudspeaker manufacturer in the East.

Box DP-1

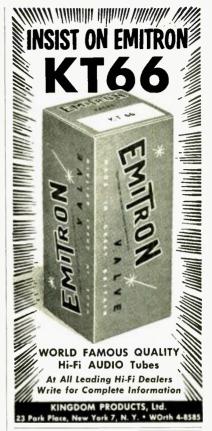

HI-FI AMPLIFIERS NEED ACROSOUND **ULTRA-LINEAR TRANSFORMERS**

The Ultra-Linear* power amplifier stage, introduced by Acrosound in 1952, has gained world-wide acceptance as the finest circuit for high fidelity sound. Technically, its superiority can be amply demonstrated by measurement. Aesthetically, it sounds better to the ear.

Acrosound Ultra-Linear transformers* are designed to implement the performance of the Ultra-Linear circuit. These transformers feature:

- Greater bandwidth for most realistic transient response: ±1 db, 10 CPS to 100 KC.
 Full rated power 20 CPS to 30 KC. Twice rated power 30 CPS to 20 KC.
 Correct tap location for optimum Ultra-Linear performance. Tight coupling between screen and plate winding sections.
 Low and equalized leakage reactances for maximum stable feedback.
- back.

 High primary inductance for best low frequency stability.

Whether you buy or build an Ultra-Linear amplifier, specify an Acro Ultra-Linear transformer for the best in high fidelity sound. For the complete story of Ultra-Linear, write for our 16 page catalog.

Patented!

ACRO PRODUCTS COMPANY

369 Shurs Lane Philadelphia 28, Pa.



Fiddles, trumpets, drums . . . these are musical instruments. They produce sound. And reso nances are deliberately created to give the sound timbre and identity.

The loudspeaker, however, is not a musical instrument. Its specific function is to reproduce sound. It must in no way add to the sound it reproduces. It must be free from resonance, and free from distortion.

The HARTLEY 215 has no resonance . . . and produces no distortion.

Laboratory measurements have confirmed this fact, time and time again.

You've never heard it so good.

Substitute a HARTLEY 215 in any system. Instantly you will hear the difference . . clean bass, smooth highs . . . and a sense of realism and presence that will amaze you.

only \$65



NOTE: Because the new Hartley 215 has no resonance, a non-resonant baffle should be used. The bass - reflex, and other conventional enclosures are tuned resonant systems. For best re-sults the Hartley BOFFLE Enclosure is recommended . . . available in single, dual, and 4-speaker models. Priced from \$50.75.

At franchised dealers or write to your nearest distributor:

Ottawa, Ontario, Can. J. C. Swail Company 18 Kilbarry Crescent

New York City, N. Y. Consolidated Radio 768 Amsterdam Avenue

Millburn, N. J. M. Lerner 30 Undercliff Rd.

New York City, N. Y. Leonard Radio 63 Cortlandt St.

Philadelphia, Pa. Lectronics City Line Center

HARTLEY PRODUCTS CO.

NEW YORK 51, N. Y.

ADVERTISING INDEX

Acro Products Co. Allied Radio Corp. Altec Lansing Corporation 75 Ampex Corporation 72 Audak Co. Audiogersh Corporation 3. Audio League Report 3.	79 . 85 . 73 . 88 3-36
Bard Record Company, Inc. Belden Mfg. Co. Beld Telephone Laboratories British Industries Corporation . facing p. Brush Electronics Company Butler, B. B., Mfg. Co., Inc.	87 5 22 1, 3 106
Cabinart Carter Motor Co. Centralab. Division of Globe-Union Classified Advertisements Collaro Record Changers Covicestwood Tape Recorders	55 98 110 er 3 16
Duotone Co., Inc.	86
Electro-Sonic Laboratories, Inc	77 81 111 107
Fenton Company	91
General Electric Company Goodmans Industries, Ltd. Gray Manufacturing Co.	65 17 90
Harman-Kardon, Inc. Hartley Products Co. Harvey Radio Co., Inc. Heath Co. High Fidelity House 89, Hollywood Electronics Hycor Co., Inc.	53 112 93 67 111 111 104
Karlson Associates, Inc	96 111 111
Leonard Radio, Inc	83
Marantz Company McIntosh Laboratory, Inc. Measurements Corporation Minnesota Mining and Mfg. Co. Mullard Overseas Ltd. Munston Mfg. Inc.	103 84 95 15 59 61
National Company, Inc.	57
Peerless Electrical Products Division Permoflux Corporation Pickering & Company, Inc. Pilot Radio Corp Presto Recording Corporation 18,	105 99 109 112 21 19 63 111
Quad Amplifiers	14
Radio Shack Corporation	101 94 13 11
	9 6 97 71
Tetrad Thorens Triad Transformer Corporation Tung Sol Electric, Inc.	105 102 4 8
United Transformer Co Cove University Loudspeakers. Inc 69,	r 2
White, Stan, Inc.	7

NEW "LIVE FIDELITY" Permoflux

A new concept in speaker systems ... the Stereo-Vox I, Stereophonic Reproduction from Monaural Sources

· Patent applied for

Hear it at

★ CHICAGO HI-FI SHOW

Palmer House Sept. 30th, Oct. 1st & 2nd

NEW YORK AUDIORAMA

Hotel New Yorker Oct. 13th thru 16th

The Stereo-Vox I Speaker System adds the "3rd dimension"—reverberation—monaural sound ... without duplication of components.

For name of nearest Permoflux Stereo-Vox Dealer write to Dept. J . .

Permoflux Corporation

4902 W. Grand Ave., Chicago 39, III. Canadian Licensee: Campbell Mfg. Co., Ltd. Export: CBS International, New York, N. Y.

IF YOU ARE MOVING

Please notify our Circulation Department at least 5 weeks in advance. The Post Office does not forward magazines sent to wrong destinations unless you pay additional postage, and we can NOT dupli-cate copies sent to you once. To save yourself, us, and the Post Office a head-ache, won't you please cooperate? When notifying us, please give your eld ad dress and your new address.

> Circulation Department RADIO MAGAZINES, INC.

P. O. Box 629 Mineola N. Y

mmmme MANAGER, AUDIO **SALES**

Broadcast equipment manufacturer requires sales-minded audio engineer to head Audio Sales Department. This is a very important, high level, salaried position administering entire audio sales program. Includes sales engineering, product planning, in addition to acting as liaison between customer and Engineering and Production Departments. Occasional travel to assist field sales force. Send full details with photo to Sales Manager, Gates Radio Company, Quincy, Illinois.

521 EAST 162nd STREET

LUdlow 5-4239

SIMPLE AS



To make it just as easy as possible for AUDIO's readers to subscribe, order books, get further information about the new products and the new literature mentioned in the pages of the magazine, or to get catalog sheets and brochures describing articles advertised, we provide herewith three cards. We know that many readers are loath to cut coupons from the pages of their favorite magazine because they have told us so. And we know that many times one would like to have complete and thorough data about something he sees in these pages, yet he considers it too much trouble to hunt up paper and envelope—not to mention the stamp—and write a long letter detailing what he wants

to know. This is just as simple as we know how to make it with the exception of stenciling each subscriber's name and address on each of the postcards—an aperation which would be highly impractical from the printing standpoint. But from now on, when you want more information about something you have seen advertised or mentioned in AUDIO you need only indicate it on



the appropriate card, print your name and address, and drop it in the nearest postbox. We pay the postage, and it goes without saying that we wouldn't include these cards if we didn't welcome your wise of them. And, for the first time, you can enter your subscription without sending a penny with your order—we'll bill you later. For books, we'll have to ask for the money in advance,







Readers have told us that they often want to know more about some of the items mentioned in the New Products and New Literature pages of the magazine, but that they do not want to take the time and effort to write to each one of the sources individually to get all the information they need. As a matter of fact, in an average issue there are usually ten items in the New Literature column, and between ten and fifteen on the New Products pages. It is conceivable that the average reader might want information on at least ten of these items, since they are selected with the interests of most of AUDIO's readers in mind. Thus one would have to have ten envelopes, ten sheets of paper, and ten three-cent stamps, together with the need for writing the ten letters and inscribing each with name and address. We do it all for you, assuming that you are willing to circle the items about which more information is desired and to write your name and address once. We will forward your inquiries to the organization involved, and you will receive the data you want with only one inquiry. Isn't that os simple as A B C?



In just the same way you can get more information about any product that is advertised in the pages of AUDIO. But there is a little more work involved in this, since you must indicate the item in which you are interested and the name of the manufacturer. However, you still have to write your name and address only once for all the information you want about advertised items from a single issue—unless you want to know all about everything. If your cards indicate that this is likely to be the case, we will make them larger to fit your requirements. In the meantime, if you do need more spoce, you might subscribe to two copies.







PLEASE ENTER MY SUBSCRIPTION TO AUDIO

	No	
P	etage Stan	φ
	Nacoussy	
	Mailed in t	
V	nited State	1

BUSINESS REPLY ENVELOPE

AUDIO

P. O. Box 629 Mineola, N. Y.





BUSINESS REPLY ENVELOPE

First Class Permit No. 142, Mineola, N. Y.

AUDIO

P. O. Box 629 Mineola, N. Y.



BOOK ORDER Please send me the books checked below postage paid. I enclose check money order in full payment. BUSINESS The 2nd audio anthology Board cover, \$3.00 The 2nd audio anthology Paper cover, \$2.00 P. O. Box 629 Mineola, N. Y ☐ the 3rd audio anthology* Board cover, \$3.50 No. ☐ the 3rd audio anthology* Paper cover, \$2.50 ☐ Electronic Musical Instruments П Dorf. \$7.50 (Foreign \$8.00) Wear and Care of Records and Styli, m Weiler. \$1.00 OPE Ready October 13, 1955 ADDRESS ZONE___STATE_

AUDIO, P. O. Box 629, Mineola, N. Y.

P 18

P 19

Equipment Report

P 17

To start receiving Audio monthly without any effort on your part to locate one on the newsstands or at your jobber's, mark the appropriate boxes with crosses, tear out the card, and drop it into a handy postbox. If you are one of those who always pays in advance, we will accept your check or money order—we do not recommend cash to be sent through the mails—enclose the card in an envelope, and mail. This will cost you an extra three cents, so if you wait until we send you a bill, we'll enclose a business reply envelope for your convenience. We try to make it as easy for you as we know how.

Unfortunately, we do have to have money with your order in the case of books, for many of those our readers order are those which we must purchase from other sources. And even with our own publications, we do have to pay the printer If we expect to have him print the next book we put out. But we can help in this fashion—if you want any book from any publisher, just list the name of the book and the author and we'll get It for you. It helps if you know the name of the publisher, but that isn't necessary. If you aren't sure about the price, make a good guess and enclose that amount—we'll mail the book COD for the difference, or we will refund the overpayment if you are too generous. In any case, we pay the postage on the book, although you will have to pay the postage on the envelope you use to send us the order card. Try it once and see how easy It is!

At the end of each item of New Literature or New Products you will notice a letter and a number—the letter indicates the month and the number indicates which item it is. All you have to do to get full information about the product or to get the literature described is to circle the appropriate number, add your name and address—printed if possible, so the information doesn't end up in the Post Office at Washington—and mail it to us. We'll do the rest, and you may be sure that we'll be prompt because we are just as anxious for your inquiries to get to their destination as you are—and besides, we don't have room enough around the office to accumulate a lot of cards. Circle one item, if you wish, or all of them—we'll carry on from there. This whole system breaks down if there is a charge for the New Literature described, so if you can suggest any improvements in this service, we would appreciate hearing about them.

8

P 16

We can't think of any way to simplify this card without actually listing every product mentioned throughout the magazine, and this becomes an impossibility—we don't always get the ads sufficiently far in advance of printing time to make it possible to plan such an elaborate card. So if you want to know more about any product advertised—except from the Classified section—just write down the product and the name of the advertiser as well as your own name and address. We can't promise that no salesman will call, but we think it highly unlikely, because very few manufacturers have enough salesmen to answer all the inquiries individually in person. But we are sure that each manufacturer will be glad to send you the information you want without any obligation. If we find that this card doesn't have enough room for all the information you want, we will have to enlarge it, but let's try this one for size.

ZONE

Please send me further information on the Items circled as listed in New Products, New Literature and

P 21

P 22

P 23

www.americanradiohistorv.com

P 20

Of this you can be sure...

there is no finer

Record Changer than the



Many components are involved in the performance of your music system. Being sure of your record changer is winning half the battle. And you'll know the difference, too.

If your system is capable of reproducing tones below 40 cycles you'll recognize the RC-54 because of its freedom from rumble growl. If you're a musician you will note that the pitch is correct and constant-because the speeds are accurate and there is no variation to cause wow and flutter.

But musician or not, you will marvel at the gentle respect the RC-54 has for your records . the fast, 7-second change cycle, regardless of record speed . . . and the smooth, quiet operation that tells its own story of precision.

Whether you are planning to replace an obsolete unit or to include it in a new system, you will find it easy to fit into small space because of its smaller mounting deck.

You will particularly welcome the fact that the RC-54 is now supplied with a pre-cut mounting board, power cord and audio connecting cord thereby making it possible for anyone to install it within a matter of minutes.*



Also available on hardwood base in Mahogany or Blond finish—optional.



See the RC-54 at your Sound Dealer or write for complete specifications to Dept. XK-1

